

## Square Type LED lamp

BL-L55

### ■ Features:

- 5mm square type LED Lamps
- Ultra brightness.
- Choice of various viewing angles.
- Diffused, Transparent and Water clear lens
- IC compatible /Low current capability.
- RoHs Compliance



**Electrical-optical characteristics: (Ta=25°C)** (Test Condition: IF=20mA)

Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (lv) Unit:mcd		Viewing Angle 201/2(deg)
	Emitted Color	Material	$\lambda_p$ (nm)		Typ	Max	Min.	Typ.	
BL-L55ASRC	Hi Red	AlGaAs,SH	660	1.85	2.20	50	100	110	
BL-L55ALRC	Super Red	AlGaAs,DH	660	1.85	2.20	80	200		
BL-L55AURC	Ultra Red	AlGaAs,DDH	660	1.95	2.20	100	300		
BL-L55AUOC	Ultra Orange	AlGaInP	630	2.10	2.50	120	500		
BL-L55AUYC	Ultra Yellow	AlGaInP	590	2.10	2.50	150	700		
BL-L55AUGC	Ultra Green	AlGaInP	574	2.20	2.50	50	500		
BL-L55APGC	Ultra Pure Green	InGaN	525	3.80	4.50	400	1000		
BL-L55ABGC	Ultra Bluish Green	InGaN	505	3.80	4.50	400	900		
BL-L55ABC	Blue	InGaN	430	3.80	4.50	400	800		
BL-L55AUBC	Ultra Blue	InGaN	470	2.70	4.20	400	1200		
BL-L55AVC	UV	InGaN	405	3.80	4.50	100	150		
BL-L55AUWC	Ultra White	InGaN	/	2.70	4.20	180	2000		


### ■ Absolute maximum ratings (Ta=25°C)

Parameter	SR	LR	UR	UE	UY	UG	PG	BG	B	UB	UV	W	Unit
Forward Current $I_F$	25	25	25	30	30	30	30	30	30	30	30	30	mA
Power Dissipation $P_d$	60	60	60	65	65	75	110	110	120	120	120	120	mW
Reverse Voltage $V_R$	5	5	5	5	5	5	5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)	150	150	150	150	150	150	150	100	100	100	100	100	mA
Operation Temperature $T_{OPR}$	-40 to +80												°C
Storage Temperature $T_{STG}$	-40 to +85												°C
Lead Soldering Temperature $T_{SOL}$	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)												°C

## Square Type LED lamp

BL-L55

### ■ Package configuration & Internal circuit diagram

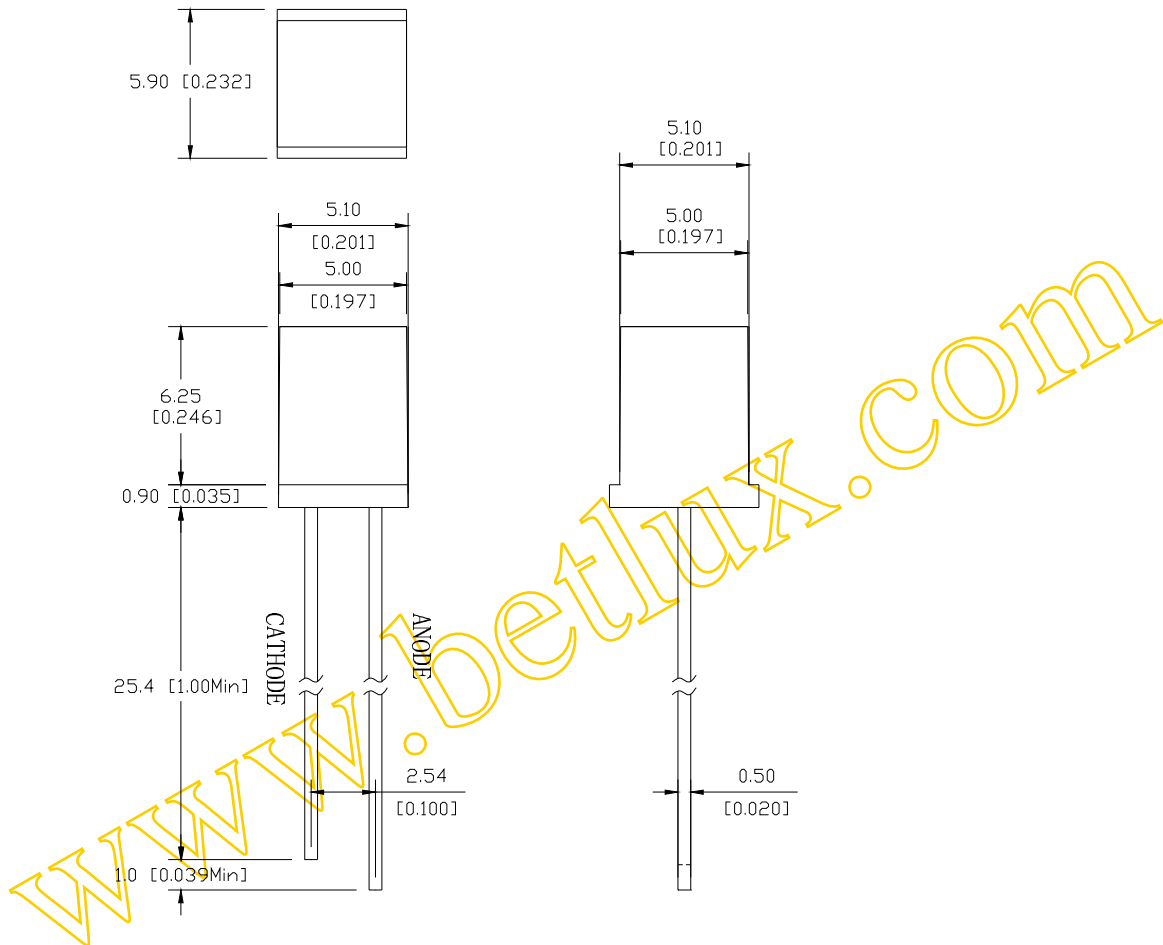

#### Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.







## Square Type LED lamp

BL-L55

### Typical electrical-optical characteristics curves:



- |   |                                      |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red                | (9) - GaAlAs 880nm                   |
| (2) - GaP 570nm/Yellow Green              | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow              | (A) - GaN/SiC 430nm/Blue             |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue           |
| (5) - GaP 700nm/Bright Red                | (C) - InGaN/SiC 505nm/Ultra Green    |
| (6) - GaAlAs/GaAs 660nm/Super Red         | (D) - InGaN/SiC 525nm/Ultra Green    |
| (8) - GaAsP/GaP 610nm/Super Red           |                                      |

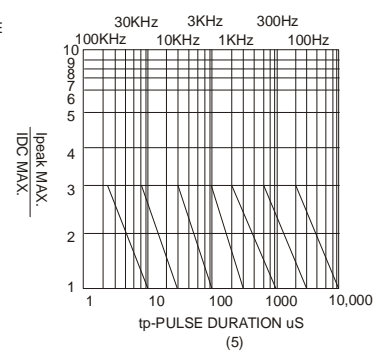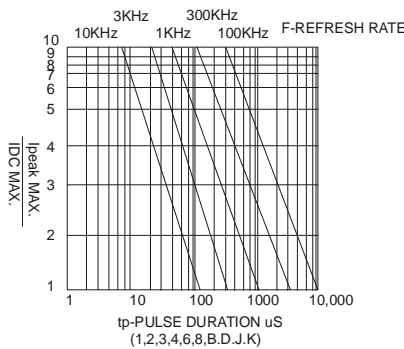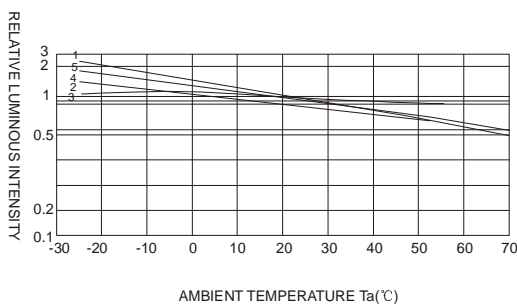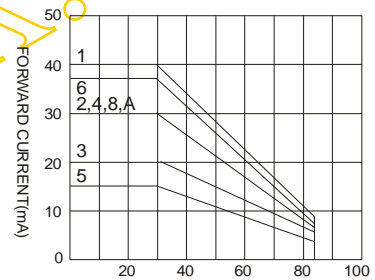

NOTE:25°C free air temperature unless otherwise specified