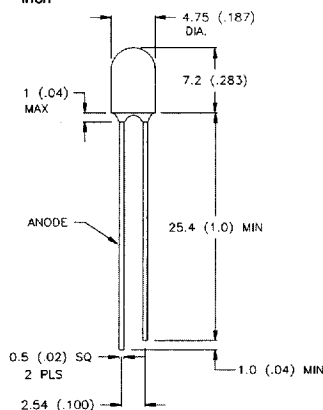

SSL-LX507F3 SERIES T4.8x7mm FLANGELESS LED LAMPS

- | | | |
|---|--|---|
| FEATURES <ul style="list-style-type: none"> • Four Color/Nine Lens Options • Bi-Color Version • Low Current Options • Flangeless Package | APPLICATIONS <ul style="list-style-type: none"> • Panel Indicators • Status P.C. Mount Indicators • Switches/Keyboards | OPTIONS AVAILABLE <ul style="list-style-type: none"> • Add-on Spacers • Add-on Leads • Panel Mounting Hardware • P.C. Mounting Options |
|---|--|---|

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	Vf@20mA	
	PEAK(nm)			TYP.(mcd.)	If(mA)		TYP.	MAX
SSL-LX507F3ID	RED	635	RED DIFF.	15	20	80	2.0	2.8
SSL-LX507F3IT	RED	635	RED TRANSP.	40	20	25	2.0	2.8
SSL-LX507F3SRD	RED	660	RED DIFF.	60	20	80	1.7	2.2
SSL-LX507F3SRT	RED	660	RED TRANSP.	120	20	25	1.7	2.2
SSL-LX507F3GD	GREEN	565	GREEN DIFF.	15	20	80	2.1	2.8
SSL-LX507F3GT	GREEN	565	GREEN TRANSP.	40	20	25	2.1	2.8
SSL-LX507F3YD	YELLOW	585	YELLOW DIFF.	15	20	80	2.1	2.8
SSL-LX507F3YT	YELLOW	585	YELLOW TRANSP.	40	20	25	2.1	2.8

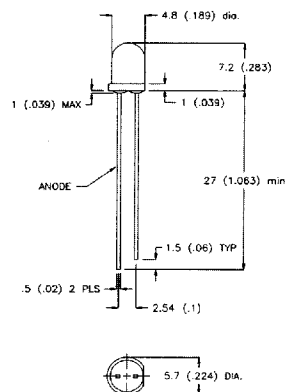
See page 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSL-LX4073 SERIES T-4.7 LED LAMP, 25mm LEADS

- | | | |
|--|---|---|
| FEATURES <ul style="list-style-type: none"> • Four Color/Nine Lens Options • Bi-Color Version • Low Current Options • FLV Series 110-410 Equiv. | APPLICATIONS <ul style="list-style-type: none"> • Panel Indicators • Status P.C. Mount Indicator • Switches/Keyboards | OPTIONS AVAILABLE <ul style="list-style-type: none"> • Add-on Spacers • Add-on Leads • Panel Mounting Hardware • P.C. Mounting Options |
|--|---|---|

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	Vf@20mA	
	PEAK(nm)			TYP.(mcd.)	If(mA)		TYP.	MAX
SSL-LX4073ID	RED	635	RED DIFF.	16	20	80	2.0	2.8
SSL-LX4073IT	RED	635	RED TRANSP.	70	20	25	2.0	2.8
SSL-LX4073SRD	RED	660	RED DIFF.	140	20	80	1.7	2.2
SSL-LX4073SRT	RED	660	RED TRANSP.	250	20	25	1.7	2.2
SSL-LX4073GD	GREEN	565	GREEN DIFF.	16	20	80	2.1	2.8
SSL-LX4073GT	GREEN	565	GREEN TRANSP.	70	20	25	2.1	2.8
SSL-LX4073YD	YELLOW	585	YELLOW DIFF.	16	20	80	2.1	2.8
SSL-LX4073YT	YELLOW	585	YELLOW TRANSP.	70	20	25	2.1	2.8
BI-COLOR OPTIONS								
SSL-LX4073IGW	RED/GREEN	635/565	WHITE DIFF.	9/12	20/20	80	2.0	2.8
LOW CURRENT OPTION (OTHER COLORS AVAILABLE)								
SSL-LX4073LID	RED	635	RED DIFF.	1.7	2	80	1.9	2.7

See pages 8 - 14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm

SSL-LX5053 SERIES T4.7 SHORT PROFILE LED LAMPS

- | | | |
|---|---|--|
| FEATURES <ul style="list-style-type: none"> • Four Color/Nine Lens Options • Short Lens Profile • Chip Near Top of Lens | APPLICATIONS <ul style="list-style-type: none"> • Panel Indicators • Status P.C. Mount Indicator • Switches/Keyboards • Optical Fiber Coupling | OPTIONS AVAILABLE <ul style="list-style-type: none"> • Add-on Spacers • Add-on Leads • Panel Mounting Hardware |
|---|---|--|

LUMEX PART NBR	EMITTED COLOR		EPOXY LENS COLOR	BRIGHTNESS		VIEW ANGLE	Vf@20mA	
	PEAK(nm)			TYP.(mcd.)	If(mA)		TYP.	MAX
SSL-LX5053ID	RED	635	RED DIFF.	15	20	100	2.0	2.8
SSL-LX5053IT	RED	635	RED TRANSP.	70	20	35	2.0	2.8
SSL-LX5053SRD	RED	660	RED DIFF.	80	20	100	1.7	2.2
SSL-LX5053SRT	RED	660	RED TRANSP.	120	20	35	1.7	2.2
SSL-LX5053GD	GREEN	565	GREEN DIFF.	15	20	100	2.1	2.8
SSL-LX5053GT	GREEN	565	GREEN TRANSP.	70	20	35	2.1	2.8
SSL-LX5053YD	YELLOW	585	YELLOW DIFF.	15	20	100	2.1	2.8
SSL-LX5053YT	YELLOW	585	YELLOW TRANSP.	70	20	35	2.1	2.8

See pages 8 - 14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch) ±.2mm
