used for: D-SUB

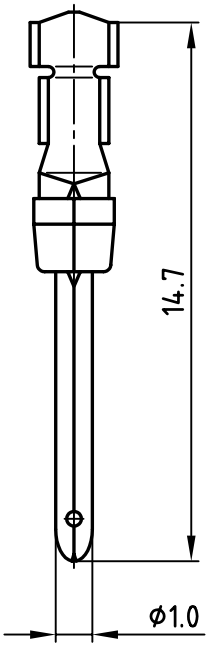

NOTES:

Material stamped Contacts: phosphor bronce
Finish: min. 8µ" hard-gold-plated in the contact area
Temperature range: -55°C to +125°C
Rated current: 7.5A
Test voltage: 1000V eff. at 50Hz
Contact resistance: <= 10mOhm
Insulation resistance: >= 5000MOhm

Directive 2002/95/EC „RoHS" Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

2002	date	name
drawn	11.01.	Parei
appd.	11.01.	Resonnek
norm		
d-old		

CONEC®

scale: 5:1
material: SEE NOTES

title:
PLUG CONTACT
CRIMP
AWG24-20

dwg no: 16K2A430A
AutoCAD 2000
DIN-A 4
sh: 1/1

part no: 161A13399X