

AN-8006 Capacitor Selection for the FMS6410B S-Video Filter

Method

The FMS6410B requires $0.1\mu F$ input coupling capacitors, but may be AC or DC coupled out. Finding video quality — i.e., low ESR, equivalent series resistance, low inductance, low leakage, and constant capacitance over a frequency range from 20Hz to 6MHz — $0.1\mu F$ capacitors presents no problem. Surface mount capacitors meeting these requirements are both inexpensive and plentiful.

The FMS6410B, when AC coupled out, also requires four 220 μ F output coupling capacitors if all outputs are to be used. See Figure 1. However, some users may use values up to 1000 μ F to pass "TILT" specifications in the two-field test. In the past, when wideband signals such as video needed coupling capacitors in the hundreds of μ F's, tantalums were the only choice.

This presents a problem. The FMS6410B was designed for low-cost applications. In the quantities needed, the cost of the tantalums is greater than the cost of the filter and the other associated components. There is a solution: modern, surface mount, aluminum electrolytic capacitors designed for use in high-frequency

switching power supplies have all the necessary qualities. For a given capacitance and voltage rating these electrolytics are about the same size as the tantalums. They also have low equivalent series resistance, low inductance, and low leakage. Since they are intended for use as bypass capacitors in switching power supplies operating up to 1MHz, they have an adequate frequency response as video coupling capacitors.

Several types from several manufacturers have been investigated. Some 220µF surface mount aluminum electrolytic capacitors from Cornell Dubilier, Elna, and United Chemi-Con were indistinguishable from highquality, high-cost tantalums, as can be seen by comparing Figures 2 and 4 with Figures 3 and 5. It should be pointed out that these are not the only suppliers of usable capacitors. Any physically small, surface mount, 220µF, 6V to 10V, aluminum electrolytic capacitor with ESR less than 1Ω at 6MHz and with less than 2% capacitance change from 20Hz to 6MHz is a candidate for use in FMS6410B circuits. Many capacitors meet these requirements. With the right capacitors, their cost is no barrier to using the FMS6410B.

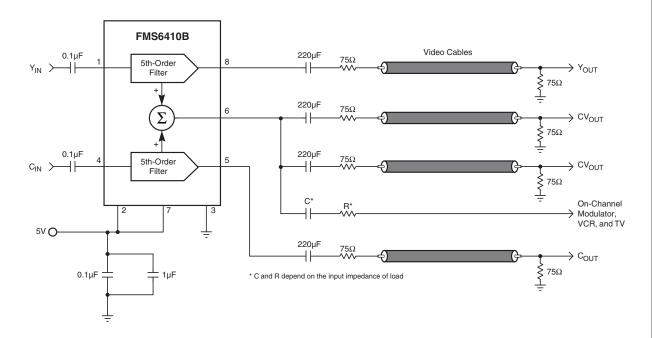


Figure 1. AC Coupled S-Video and Composite Video Line Driver for NTSC




Figure 2. -3dB Response with Tantalum Capacitor




Figure 4. Wideband Response with Tantalum Capacitor




Figure 3. -3dB Response with Aluminum Electrolytic Capacitor




Figure 5. Wideband Response with Aluminum Electrolytic Capacitor

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx™	FAST [®]	ISOPLANAR™	PowerSaver™	SuperSOT™-8
ActiveArray [™]	FASTr™	LittleFET™	PowerTrench [®]	SyncFET™
Bottomless™	FPS™	MICROCOUPLER™	QFET [®]	TinyLogic [®]
Build it Now™	FRFET™	MicroFET™	QS™	TINYOPTO™
CoolFET™	GlobalOptoisolator™	MicroPak™	QT Optoelectronics™	TruTranslation™
CROSSVOLT™	GTO™ [']	MICROWIRE™	Quiet Series™	UHC™
DOME™	HiSeC™	MSX™	RapidConfigure™	$UltraFET^{ exttt{@}}$
EcoSPARK™	I ² C TM	MSXPro™	RapidConnect™	UniFET™
E ² CMOS TM	i-Lo™	OCX TM	μSerDes™	VCX TM
EnSigna™	ImpliedDisconnect™	OCXPro™	SILENT SWITCHER®	Wire™
FACT™	IntelliMAX™	OPTOLOGIC [®]	SMART START™	
FACT Quiet Series™		OPTOPLANAR™	SPM™	
Across the board. Around the world. [™] The Power Franchise [®] Programmable Active Droop [™]		PACMAN™	Stealth™	
		POP™	SuperFET™	
		Power247™	SuperSOT™-3	
		PowerEdge™	SuperSOT™-6	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- 1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

Rev. I16