


## 3.2 x 1.6 x 0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)

### 1. Explanation of Product Number

H	2	U	3	4	W	G	T	Q	W	0	1	0	0
				(1)	(2)	(3)			(4)				

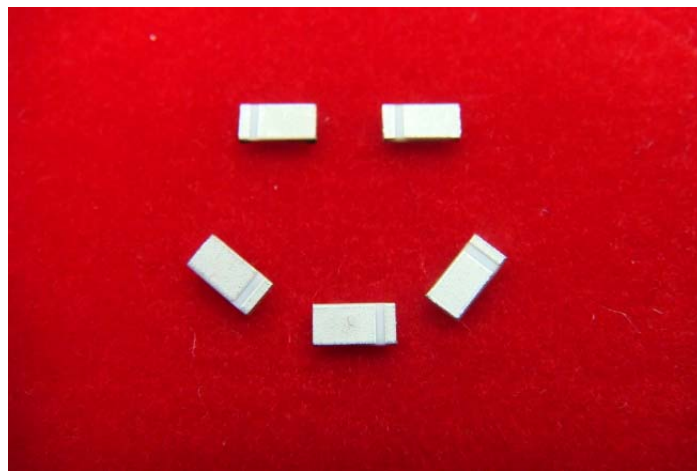

#### Product Code:

##### (1) Product Categories:

4: ceramic substrate chip antenna

##### (2) Dimensions and Polarization:


WG: 3.2x1.6x0.5(mm) / linear polarization

##### (3) Material / Working Frequency / Ground Plane Dimensions:

TQW: AS 6 / 2400~2500MHz / 80 x 40(mm)

##### (4) Antenna Series:

01: serial number

<b>Tolerances (Unless otherwise specified)</b> X : ± 1      X.X : ± 0.1      X.XX : ± 0.01 Angle : ±      Hole Dia. : ±		 Unictron Technologies Corporation Website: www.unictron.com		
Scale :	Unit : mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		
Prepared By : Meiping	Checked By : Chinling			
Designed By : Andrew	Approved By : Herbert			
<b>TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)</b>		DOCUMENT NO.	<b>H2U34WGTQW0100</b>	REV. <b>F</b>

## 2. Features

- \*Stable and reliable in performances
- \*Low temperature coefficient of frequency
- \*Low profile, compact size
- \*RoHS compliance
- \*SMT processes compatible

## 3. Applications

- \*Bluetooth earphone systems
- \*Hand-held devices when Bluetooth/WiFi functions are needed, e.g., Smart phone.
- \*IEEE802.11 b/g/n
- \*ZigBee
- \*Wireless PCMCIA cards or USB dongle

## 4. Description

Unictron's chip antenna series are specially designed for Bluetooth/WiFi applications. Based on Unictron's proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.


## 5. Electrical Specifications (80x40(mm) ground plane)

5-1.

Characteristics		Specifications	Unit
Outline Dimensions		3.2x1.6x0.5	mm
Ground Plane		80x40	mm
Center Frequency*		2442	MHz
Bandwidth (under -10dB return loss)		100 min.	MHz
VSWR		2 max.	
Impedance		50	$\Omega$
Polarization		Linear Polarization	
Gain**	Peak	2.5 (typical)	dBi
	Efficiency	84 (typical)	%
Temperature Coefficient of Frequency		0 $\pm$ 20 max (@ -40 $^{\circ}$ C ~85 $^{\circ}$ C)	ppm/ $^{\circ}$ C


\*Center frequency will be offset to working frequency according to the conditions of user's ground plane and radome.

\*\*The data was measured by A Test Lab Techno Corp.(CTIA Authorized Test Lab).


<b>Tolerances (Unless otherwise specified)</b> X : $\pm 1$ X.X : $\pm 0.1$ X.XX : $\pm 0.01$ Angle : $\pm$ Hole Dia. : $\pm$		 <b>Unictron Technologies Corporation</b> Website: www.unictron.com						
Scale :	Unit : mm							
Prepared By : Meiping	Checked By : Chinling	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION						
Designed By : Andrew	Approved By : Herbert							
<b>TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)</b>		<table border="1"> <tr> <td>DOCUMENT NO.</td> <td><b>H2U34WGTQW0100</b></td> <td>REV.</td> </tr> <tr> <td></td> <td></td> <td><b>F</b></td> </tr> </table>	DOCUMENT NO.	<b>H2U34WGTQW0100</b>	REV.			<b>F</b>
DOCUMENT NO.	<b>H2U34WGTQW0100</b>	REV.						
		<b>F</b>						

5-2.

Return Loss(S<sub>11</sub>)

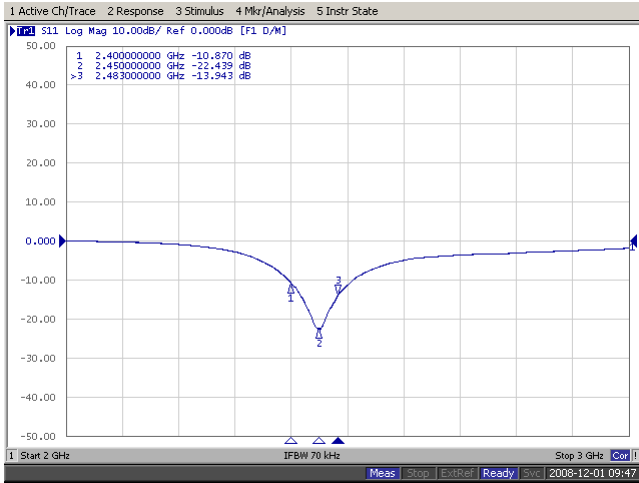


VSWR

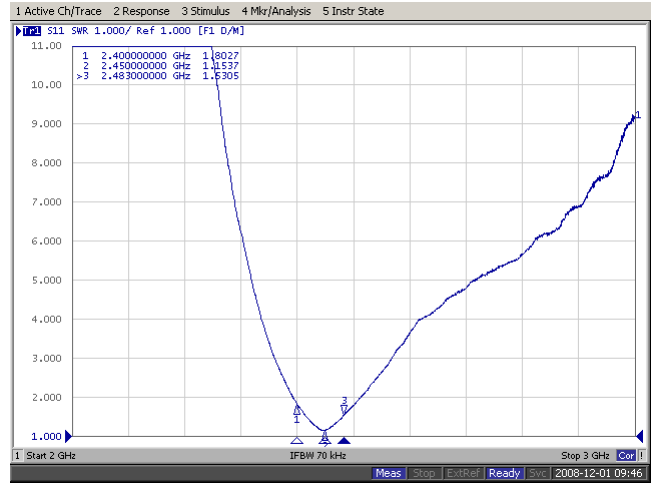

6. Antenna Dimensions & Test Board (unit: mm)

a. Antenna Dimensions

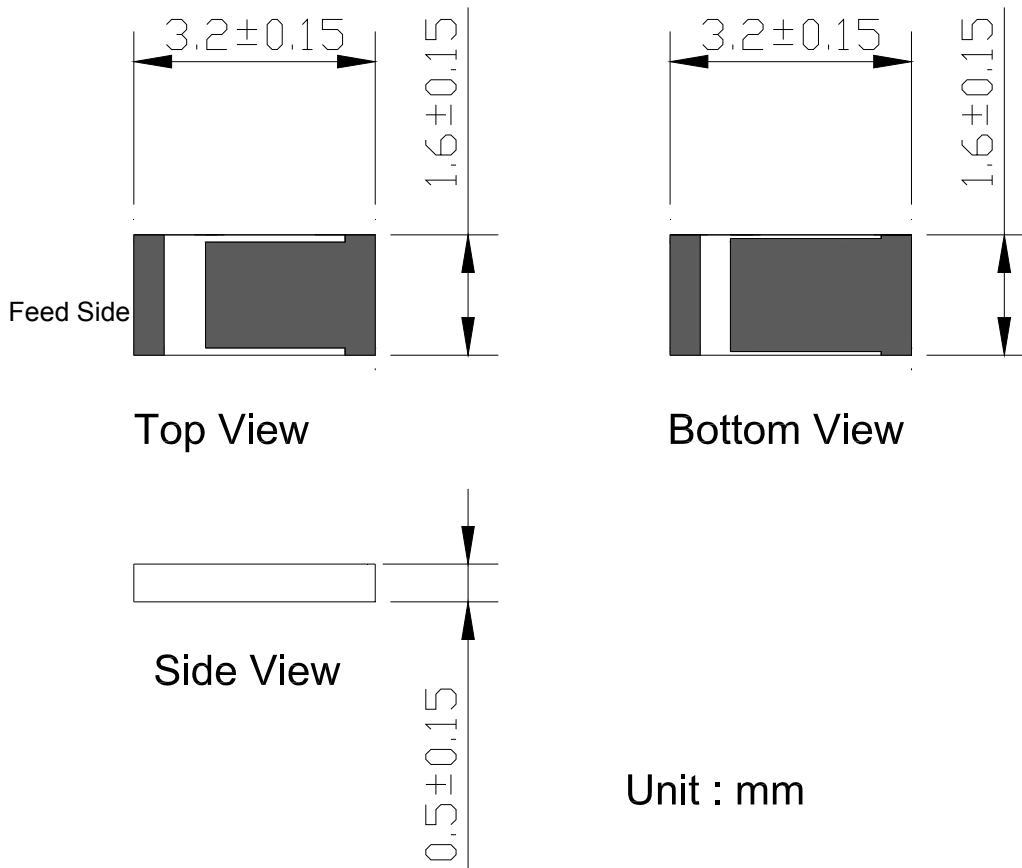

Unit : mm

Tolerances (Unless otherwise specified)

X : ± 1      X.X : ± 0.1      X.XX : ± 0.01

Angle : ±      Hole Dia. : ±



Unictron Technologies Corporation  
Website: www.unictron.com

Scale :      Unit : mm

Prepared By : Meiping      Checked By : Chinling

Designed By : Andrew      Approved By : Herbert

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

**TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)**


**DOCUMENT NO.**

**H2U34WGTQW0100**


REV.

**F**

b. Test Board with Antenna




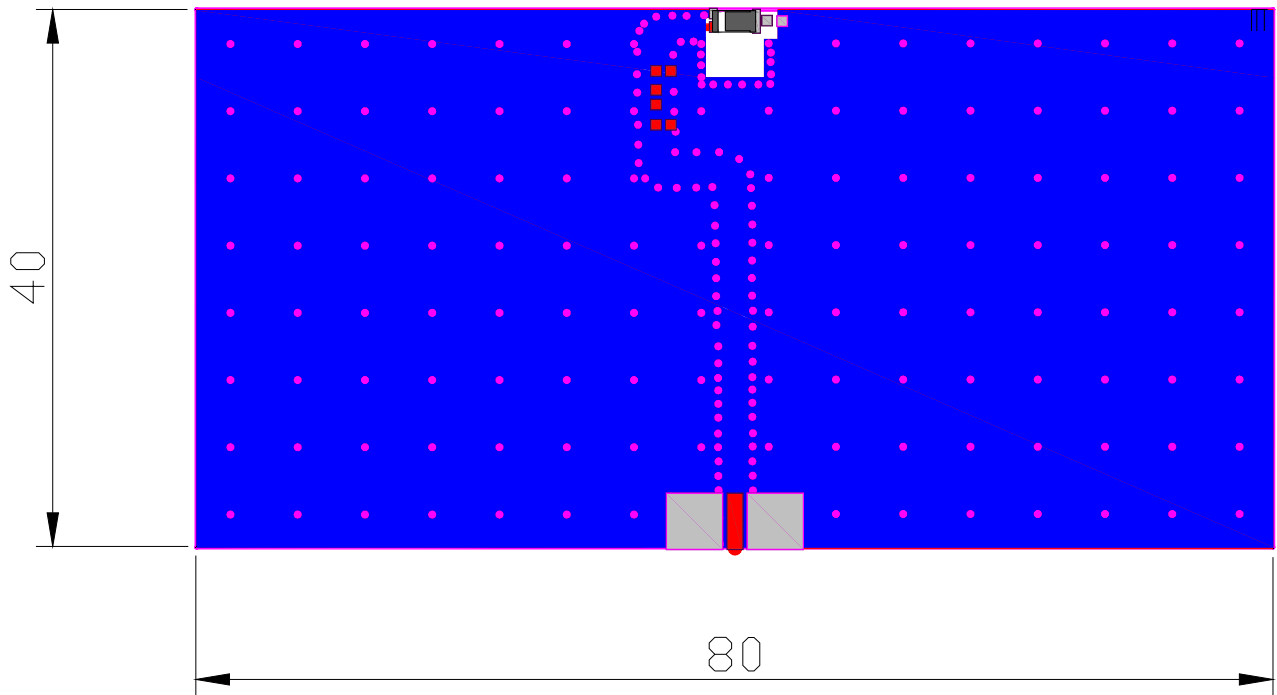


Unit : mm


<b>Tolerances (Unless otherwise specified)</b> X : ± 1      X.X : ± 0.1      X.XX : ± 0.01 Angle : ±      Hole Dia. : ±		 Unictron Technologies Corporation Website: www.unictron.com		
Scale :	Unit : mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		
Prepared By : Meiping	Checked By :Chinling			
Designed By : Andrew	Approved By :Herbert			
<b>TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)</b>		DOCUMENT NO.	<b>H2U34WGTQW0100</b>	REV. <b>F</b>

# 7. Radiation Pattern (80x40(mm) ground plane)

## 7-1. 3D Gain Pattern (at 2442 MHz)

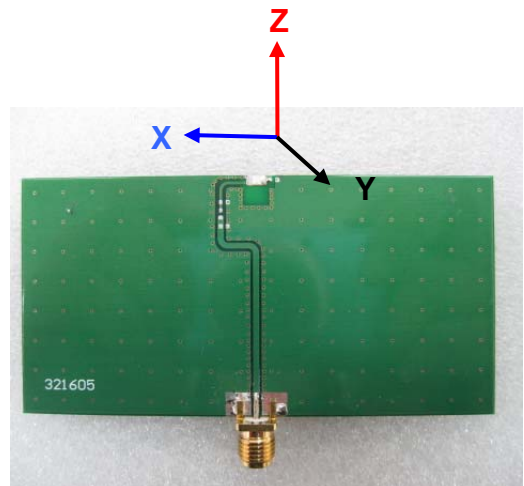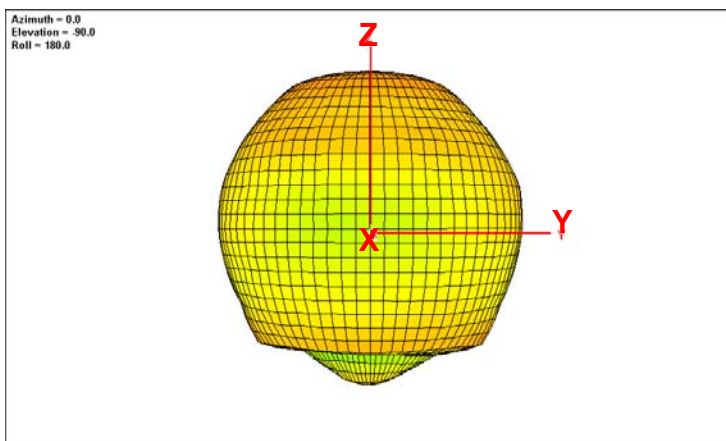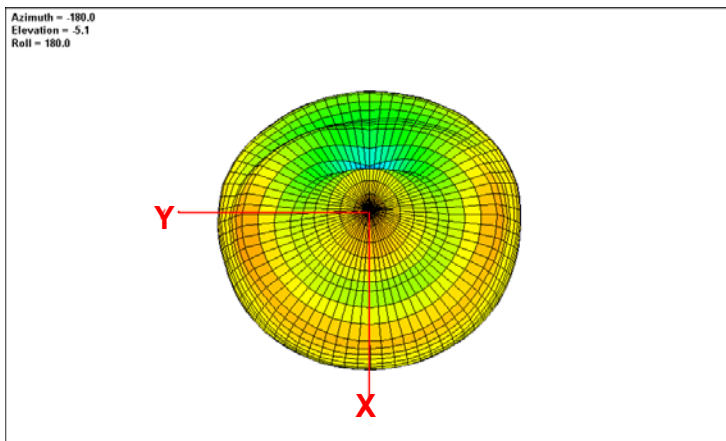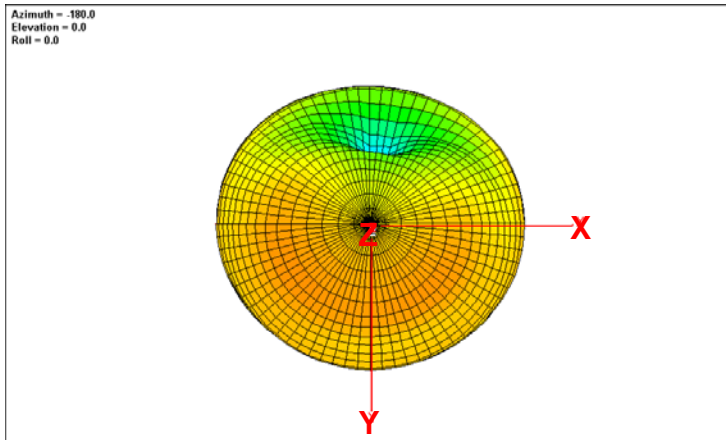


<b>Tolerances (Unless otherwise specified)</b>	
X : ± 1	X.X : ± 0.1    X.XX : ± 0.01
Angle : ±	Hole Dia. : ±
Scale :	Unit : mm
Prepared By : Meiping	Checked By : Chinling
Designed By : Andrew	Approved By : Herbert
<b>TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)</b>	


 <b>Unictron Technologies Corporation</b> Website: www.unictron.com			
		THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION	
DOCUMENT NO.	<b>H2U34WGTQW0100</b>	REV.	<b>F</b>

### 7-2. Efficiency Table

Frequency(MHz)	2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
Efficiency(dB)	-1.38	-1.04	-0.85	-0.74	-0.73	-0.76	-0.86	-1.05	-1.18	-1.27	-1.40
Efficiency(%)	72.83	78.71	82.27	84.39	84.53	84.04	82.00	78.60	76.14	74.64	72.50
Gain(dBi)	1.47	1.81	2.10	2.40	2.50	2.50	2.37	2.10	1.90	1.87	1.75

### 7-3. Efficiency vs. Frequency

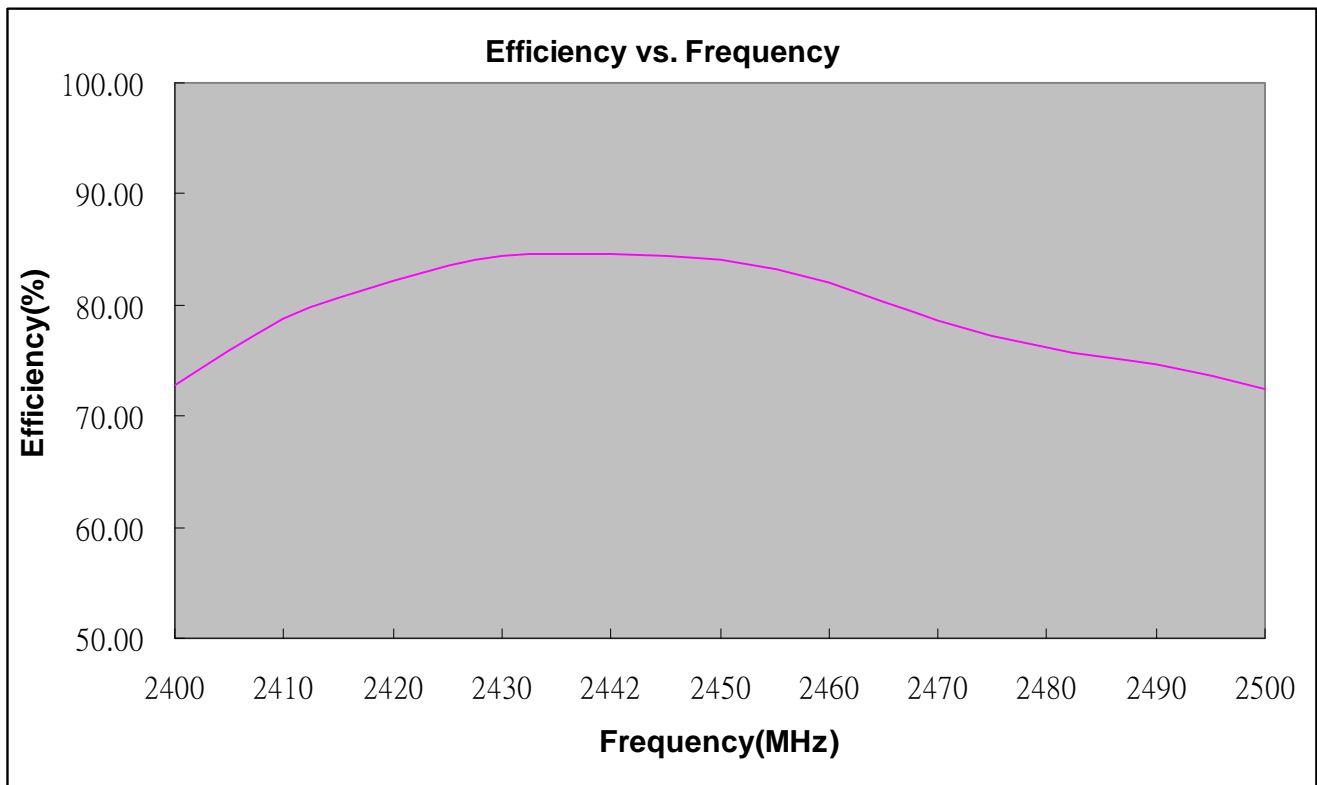


<b>Tolerances (Unless otherwise specified)</b> X : ± 1      X.X : ± 0.1      X.XX : ± 0.01 Angle : ±      Hole Dia. : ±		 Unictron Technologies Corporation Website: www.unictron.com
Scale :	Unit : mm	
Prepared By : Meiping	Checked By : Chinling	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION
Designed By : Andrew	Approved By : Herbert	
<b>TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)</b>		DOCUMENT NO. <b>H2U34WGTQW0100</b>
		REV. <b>F</b>

## 8. Layout Guide:


### a. Solder Land Pattern:


Land pattern for soldering (gray marking areas) is as shown below. Depending on Customer's requirement, matching circuit as shown below is also recommended .

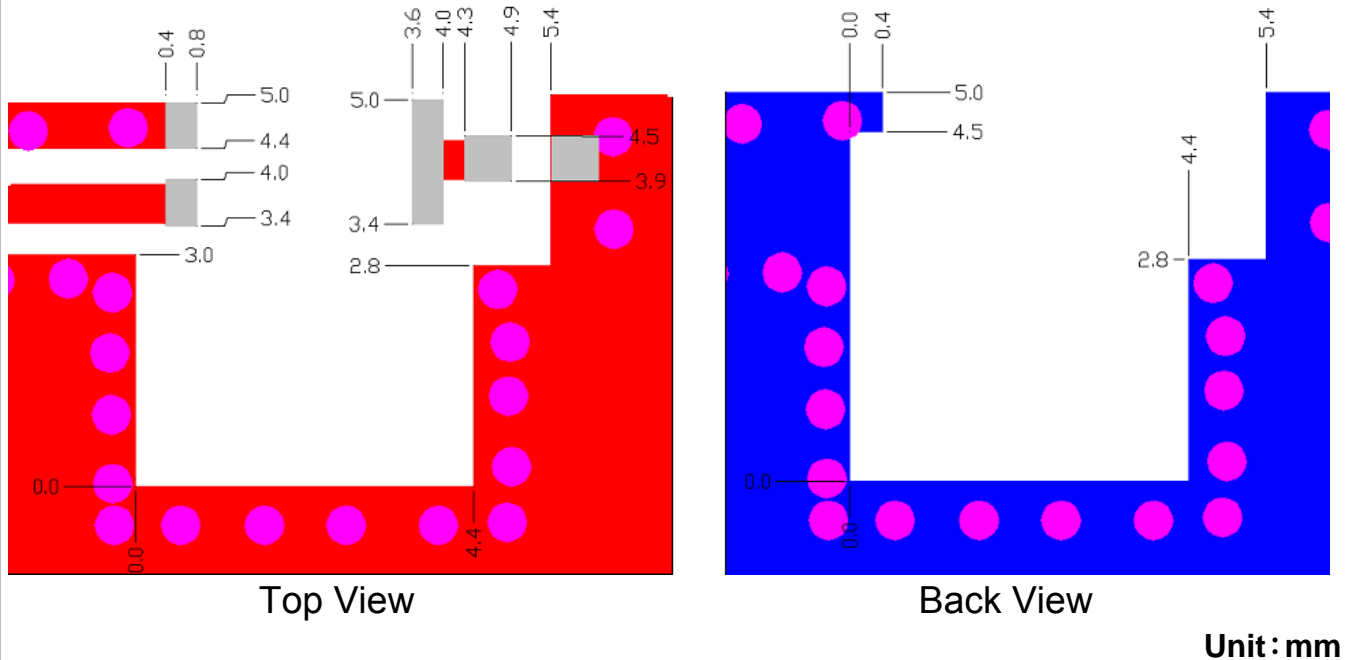

## 9. Frequency tuning:


### a. Chip antenna tuning scenario :

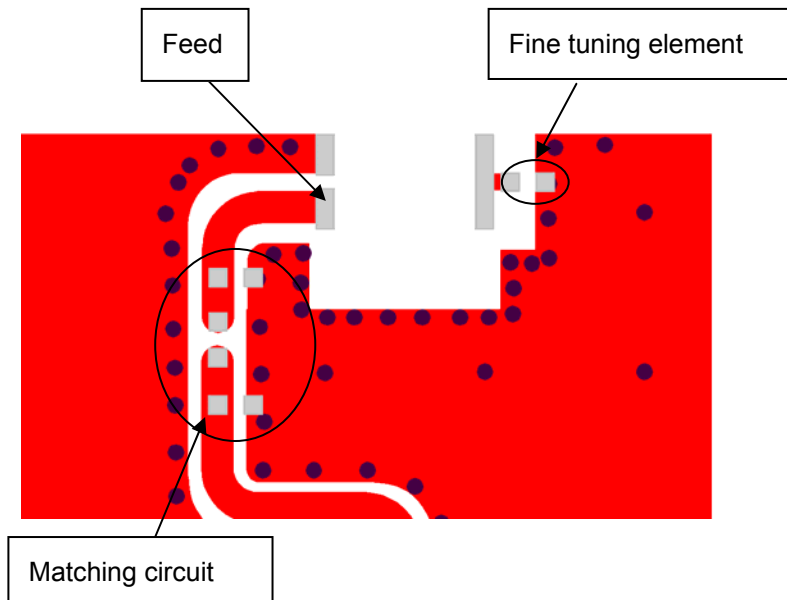

<b>Tolerances (Unless otherwise specified)</b> X : $\pm 1$ X.X : $\pm 0.1$ X.XX : $\pm 0.01$ Angle : $\pm$ Hole Dia. : $\pm$		 <b>Unictron Technologies Corporation</b> Website: <a href="http://www.unictron.com">www.unictron.com</a>		
Scale :	Unit : mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		
Prepared By : Meiping	Checked By : Chinling			
Designed By : Andrew	Approved By : Herbert			
<b>TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)</b>		<b>DOCUMENT NO.</b>	<b>H2U34WGTQW0100</b>	<b>REV.</b> <b>F</b>


b. Matching circuit : (Center frequency is about 2442MHz at 80x40(mm) ground plane)

### Antenna

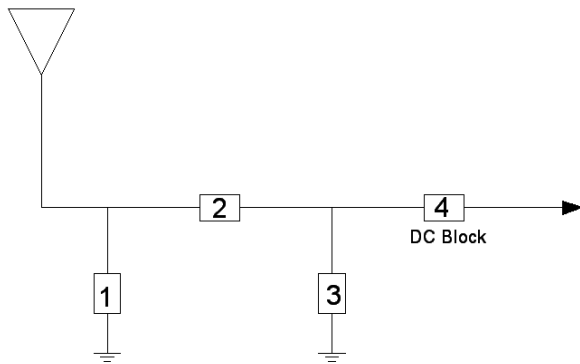

System Matching Circuit Component		
Location	Description	Vendor
1	N/A	-
2	0Ω	(0402)
3	N/A	-
4	22pF	TDK(0402)
Fine tuning element	8pF	TDK(0402)

c. Fine tuning element vs. Center frequency

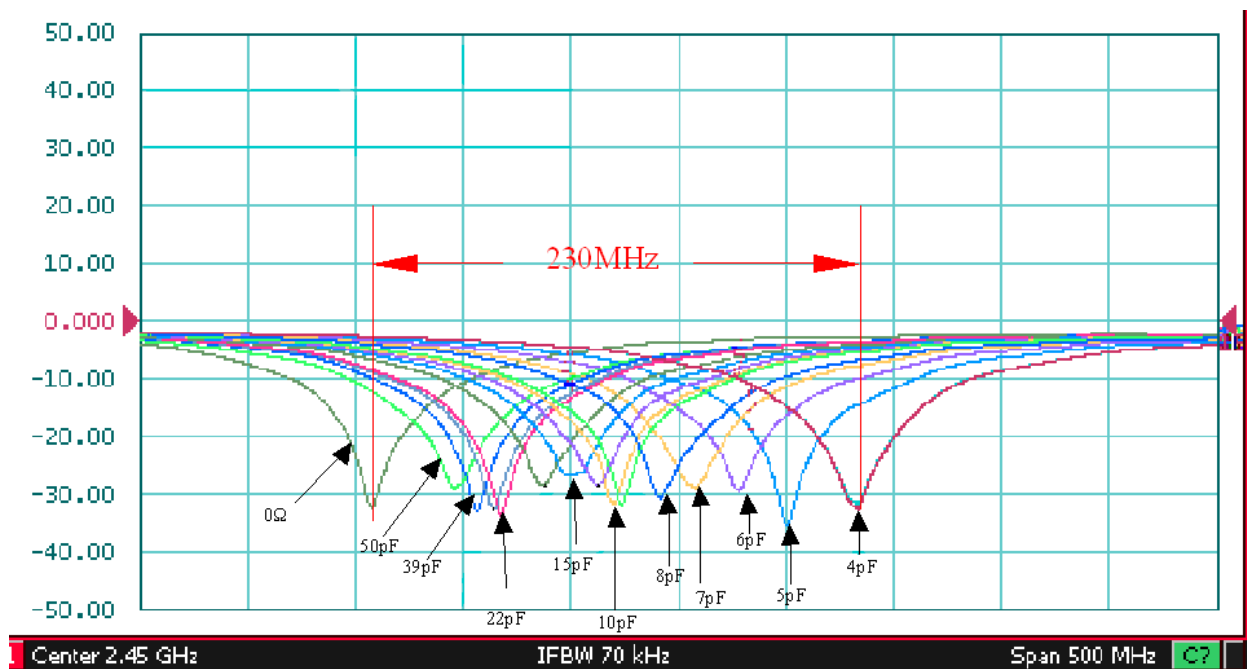

#### Tolerances (Unless otherwise specified)

X : ± 1      X.X : ± 0.1      X.XX : ± 0.01

Angle : ±      Hole Dia. : ±

Scale :      Unit : mm

Prepared By : Meiping      Checked By : Chinling

Designed By : Andrew      Approved By : Herbert



Unictron Technologies Corporation  
Website: www.unictron.com

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

**TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)**

**DOCUMENT NO.**

**H2U34WGTQW0100**

REV.

**F**



## 10. Reliability test :

Test item	Test condition / Test method	Specification
Solderability	*Solder bath temperature : 260 ± 5°C *Immersion time : 2 ± 0.5 sec	At least 95% of a surface of each terminal electrode must be covered by fresh solder.
Resistance to dissolution of metallization)	*Solder bath temperature : 260 ± 5°C *Leaching immersion time : 30 ± 0.5 sec	Loss of metallization on the edges of each electrode shall not exceed 25%.
Drop Test	*1.8m drop on concrete with 150g weight *XYZ each 30 times	No mechanical damage. Samples shall satisfy electrical specification after test.
Bending test	Warp:2mm	No mechanical damage. Samples shall satisfy electrical specification after test.
Temperature cycle	-55°C/ 30min~125°C /30min Total 1000 cycles	No mechanical damage. Samples shall satisfy electrical specification after test
High temperature	*Temperature : 125°C *Test duration : 1000 hours	No mechanical damage. Samples shall satisfy electrical specification after test.
Low temperature	*Temperature : -55°C *Test duration : 1000 hours	No mechanical damage. Samples shall satisfy electrical specification after test.
Adhesive Strength of Termination	*Pressure:5N *Duration : 10±1 sec	No remarkable damage or removal of the termination.
Vibration	*Applied Frequency : 10-55-10Hz(1min) *1.5 p-p amplitude for XYZ each direction of 120min	No mechanical damage. Samples shall satisfy electrical specification after test
Damp heat	*Humidity:85% *Temperature:85°C *Time : 1000 hours	No mechanical damage. Samples shall satisfy electrical specification after test

### Tolerances (Unless otherwise specified)

X : ± 1      X.X : ± 0.1      X.XX : ± 0.01

Angle : ±      Hole Dia. : ±



Unictron Technologies Corporation  
Website: www.unictron.com

Scale :      Unit : mm

Prepared By : Meiping      Checked By : Chinling

Designed By : Andrew      Approved By : Herbert

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

**TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)**

**DOCUMENT NO.**


**H2U34WGTQW0100**

REV.


**F**

# 11. Soldering Conditions:

a. Typical Soldering Profile for Lead-free Process

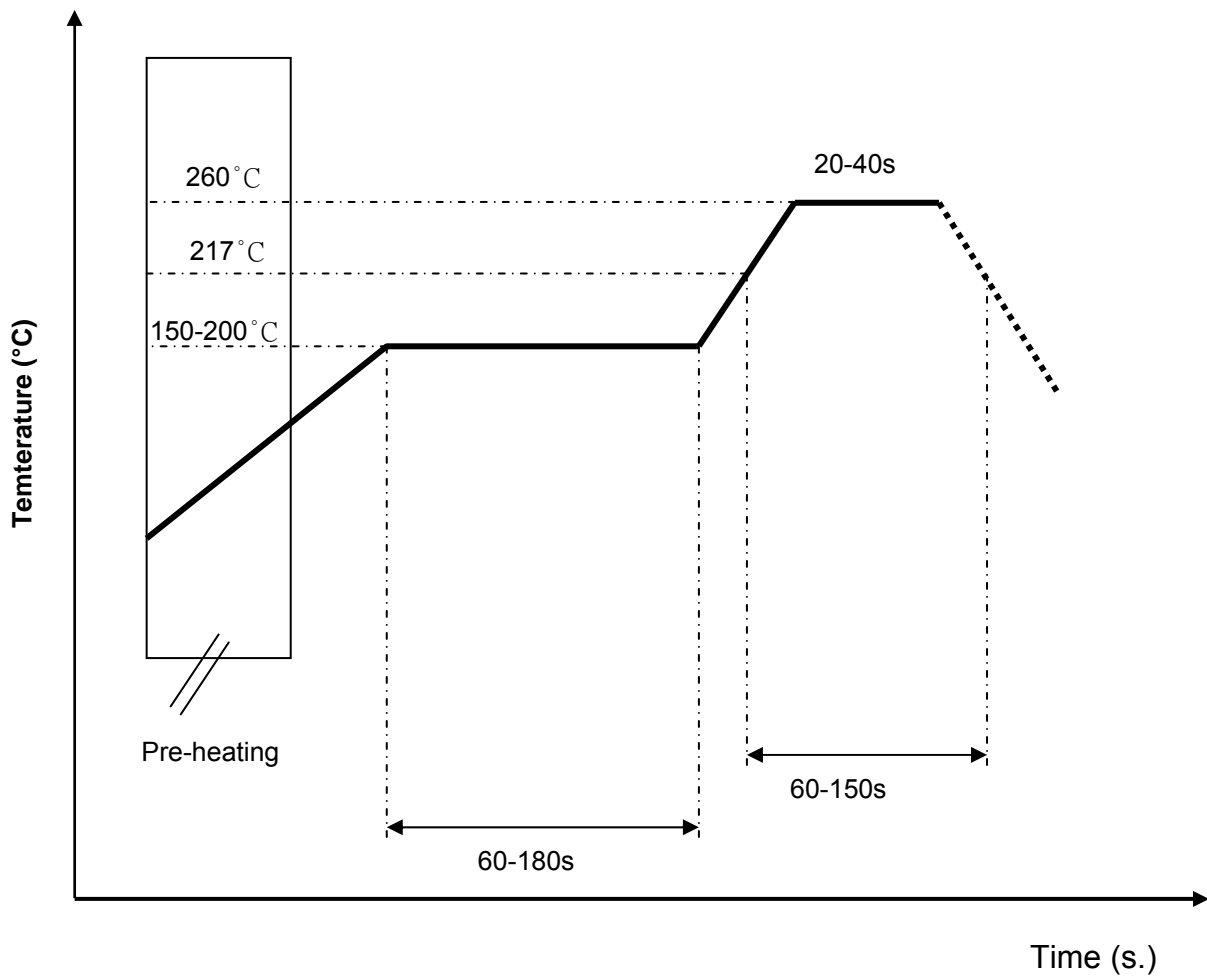


<b>Tolerances (Unless otherwise specified)</b>	
X : ± 1	X.X : ± 0.1      X.XX : ± 0.01
Angle : ±	Hole Dia. : ±
Scale :	Unit : mm
Prepared By : Meiping	Checked By :Chinling
Designed By : Andrew	Approved By :Herbert
<b>TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)</b>	

 <b>Unictron Technologies Corporation</b> Website: www.unictron.com			
		THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION	
<b>DOCUMENT NO.</b>	<b>H2U34WGTQW0100</b>	<b>REV.</b>	<b>F</b>

## 12. Packing:

- (1) Quantity/Reel: 6000pcs/Reel
- (2) Plastic tape:

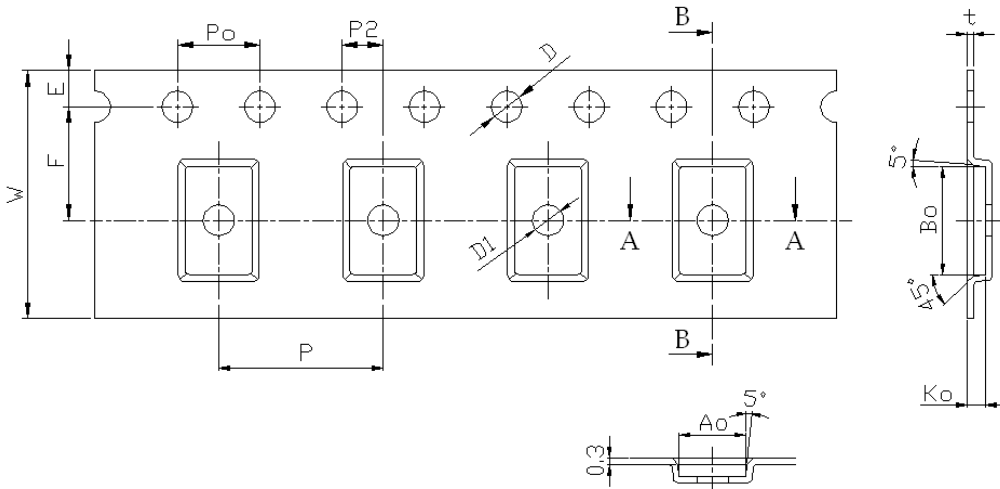

1. Cumulative tolerance of 10 sprocket hole pitch:  $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm
3.  $A_0$  and  $B_0$  measured on a plane above the inside bottom of the pocket.
4.  $K_0$  measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
5. All dimensions meet EIA-481-B requirements.
6. Material:  Clear Non Anti-Static Polystyrene.  
 Black Conductive Polystyrene.

### 2.1 Tape Dimensions(unit: mm)


Feature	Specifications	Tolerances
W	12.00	$\pm 0.30$
P	8.00	$\pm 0.10$
E	1.75	$\pm 0.10$
F	5.50	$\pm 0.10$
P2	2.00	$\pm 0.10$
D	1.50	+0.10 -0.00
Po	4.00	$\pm 0.10$
10Po	40.00	$\pm 0.20$

### 2.2 Pocket Dimensions(unit: mm)

Feature	Specifications	Tolerances
$A_0$	1.90	+0.20
$B_0$	3.50	-0.10
$K_0$	0.60	$\pm 0.10$
t	0.30	$\pm 0.05$

## 13. Storage Conditions:

- (1) Temperature:  $-25^{\circ}\text{C}$  to  $85^{\circ}\text{C}$
- (2) Relative Humidity: 20% to 70%

<b>Tolerances (Unless otherwise specified)</b> X : $\pm 1$ X.X : $\pm 0.1$ X.XX : $\pm 0.01$ Angle : $\pm$ Hole Dia. : $\pm$		 Unictron Technologies Corporation Website: www.unictron.com		
Scale :	Unit : mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		
Prepared By : Meiping	Checked By : Chinling			
Designed By : Andrew	Approved By : Herbert			
<b>TITLE : 3.2x1.6x0.5 WiFi/Bluetooth Ceramic Chip Antenna (AA055)</b>		DOCUMENT NO.	<b>H2U34WGTQW0100</b>	REV. <b>F</b>