

# 121-191 Annular Convoluted Tubing with External Braid and Jacket




Series 72  
Guardian

## For environmental EMI/RFI applications



### How To Order

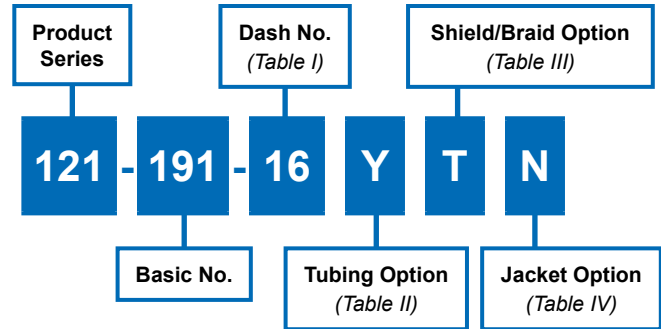


Dash No	A Inside Dia		B Outside Dia	
	Min	Max	Min	Max
09	.24 (6.1)	.28 (7.1)	.54 (13.7)	.58 (14.7)
12	.33 (8.4)	.37 (9.4)	.64 (16.3)	.68 (17.3)
16	.45 (11.4)	.50 (12.7)	.76 (19.3)	.82 (20.8)
20	.57 (14.5)	.62 (15.7)	.87 (22.1)	.93 (23.6)
24	.69 (17.5)	.75 (19.1)	1.04 (26.4)	1.10 (27.9)
28	.81 (20.6)	.87 (22.1)	1.16 (29.4)	1.24 (31.5)
32	.93 (23.6)	1.00 (25.4)	1.28 (32.5)	1.36 (34.5)
40	1.18 (30.0)	1.25 (31.8)	1.52 (38.6)	1.60 (40.6)
52	1.56 (39.6)	1.63 (41.4)	1.93 (49.0)	2.01 (51.1)

Y	Kynar/Thermally stabilized
V	PVDF/Not thermally stabilized
S	Siltem/Medium duty

N	Neoprene
H	Hypalon
E	EPDM
V	Viton
B	Duraelectric, black
G	Bluejacket, Gray
TN	Duraelectric, Desert Tan

T	Tin/Copper
C	Stainless Steel
N	Nickel Copper
L	ArmorLite™
D	Dacron
M	Nomex
E	AmberStrand® 100%
F	AmberStrand® 75%/25%

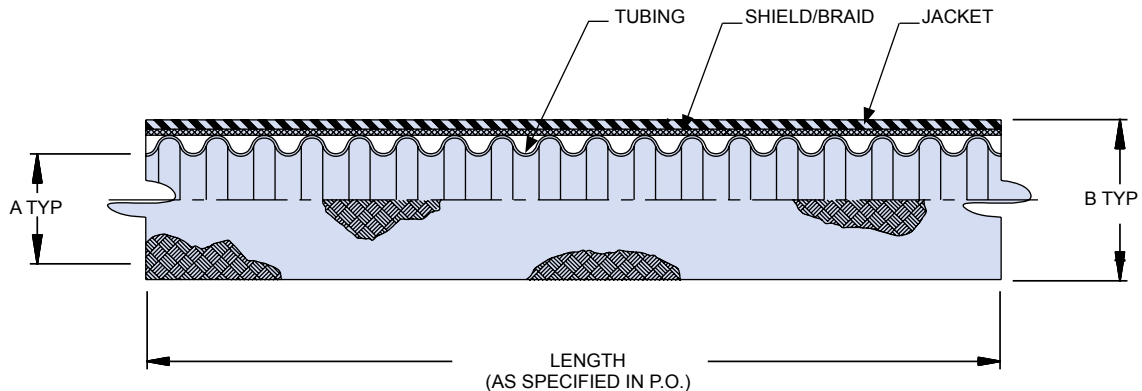

### Packaging

121-191 braided and jacketed conduit is typically supplied in 50 foot lengths. Longer lengths are available—consult factory for additional information. Unless otherwise specified, Glenair packages optimal lengths of product based on weight, size, and commercial carrier specifications. If necessary, consult factory for additional information on package weight restrictions.