


# Twin Diode Module

## TDM150

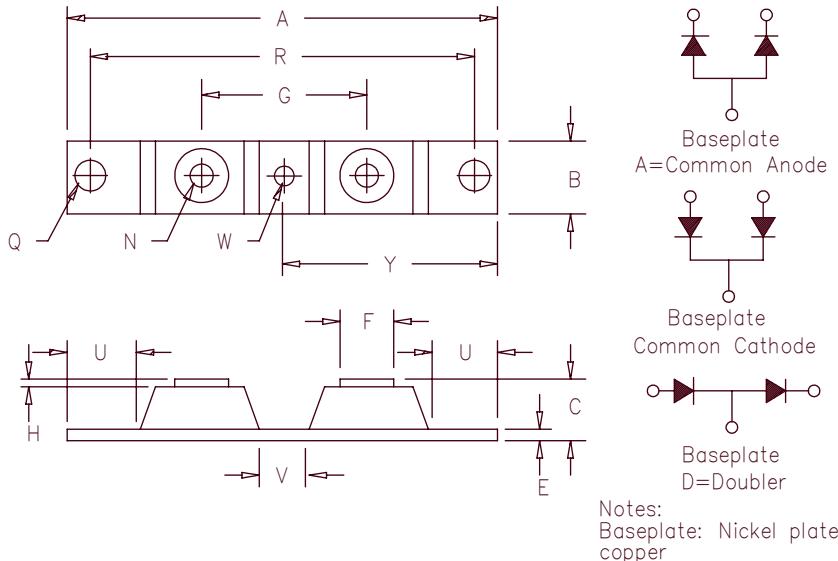

Dim. Inches		Millimeters		
Min.	Max.	Min.	Max.	Notes
A ---	3.630	---	92.20	
B 0.700	0.800	17.78	20.32	
C ---	0.625	---	15.87	
E 0.120	0.130	3.05	3.30	
F 0.490	0.510	12.45	12.95	
G 1.375 BSC		34.92 BSC		
H ---	0.050	---	1.27	
N 1/4-20 UNC			---	
Q .280	.310	6.86	7.11	Dia.
R 3.150 BSC		80.01 BSC		
U 0.600	---	15.24	---	
V 0.330	0.350	8.38	8.89	
W 0.170	0.190	4.32	4.82	Dia.
Y 1.815 BSC		46.10 BSC		

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
TDM15002*	200V	200V	
TDM15004*	400V	400V	
TDM15006*	600V	600V	
TDM15008*	800V	800V	
TDM15010*	1000V	1000V	
TDM15012*	1200V	1200V	
TDM15014*	1400V	1400V	
TDM15016*	1600V	1600V	

\*Add Suffix A for Common Anode, D for Doubler

- Compact Package
- Glass Passivated Die
- 2 x 150 Amp Current Rating
- Simplifies Circuit Assembly
- High Surge Capacity
- ROHS Compliant

### Electrical Characteristics

Average forward current per pkg	I <sub>F(AV)</sub> 300 Amps
Average forward current per leg	I <sub>F(AV)</sub> 150 Amps
Maximum surge current per leg	I <sub>FSM</sub> 2500 Amps
Max I <sup>2</sup> t for fusing	I <sup>2</sup> t 26000 A <sup>2</sup> s
Max peak forward voltage per leg	V <sub>FM</sub> 1.1 volts
Max peak reverse current per leg	I <sub>RM</sub> 5 mA
Typical reverse current per leg	I <sub>RM</sub> 50 uA

T <sub>C</sub> = 120°C, half sine, R <sub>θJC</sub> = 0.15°C/W
T <sub>C</sub> = 120°C, half sine, R <sub>θJC</sub> = 0.30°C/W
8.3 ms, half sine, T <sub>J</sub> = 175°C
I <sub>FM</sub> = 200A; T <sub>J</sub> = 25°C*
V <sub>RRM,TJ</sub> = 150°C
V <sub>RRM,TJ</sub> = 25°C

\*Pulse test: Pulse width 300μsec, Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 175°C
Operating junction temp range	T <sub>J</sub>	-55°C to 175°C
Max thermal resistance per leg	R <sub>θJC</sub>	0.3°C/W Junction to case
Typical thermal resistance per leg (greased)	R <sub>θCS</sub>	0.08°C/W Case to sink
Terminal Torque		40–50 inch pounds
Mounting Base Torque (outside holes)		30–40 inch pounds
Mounting Base Torque (center hole) center hole must be torqued first		8–10 inch pounds
Weight		2.82 ounces (80 grams) typical

# TDM150

Figure 1  
Typical Forward Characteristics – Per Leg

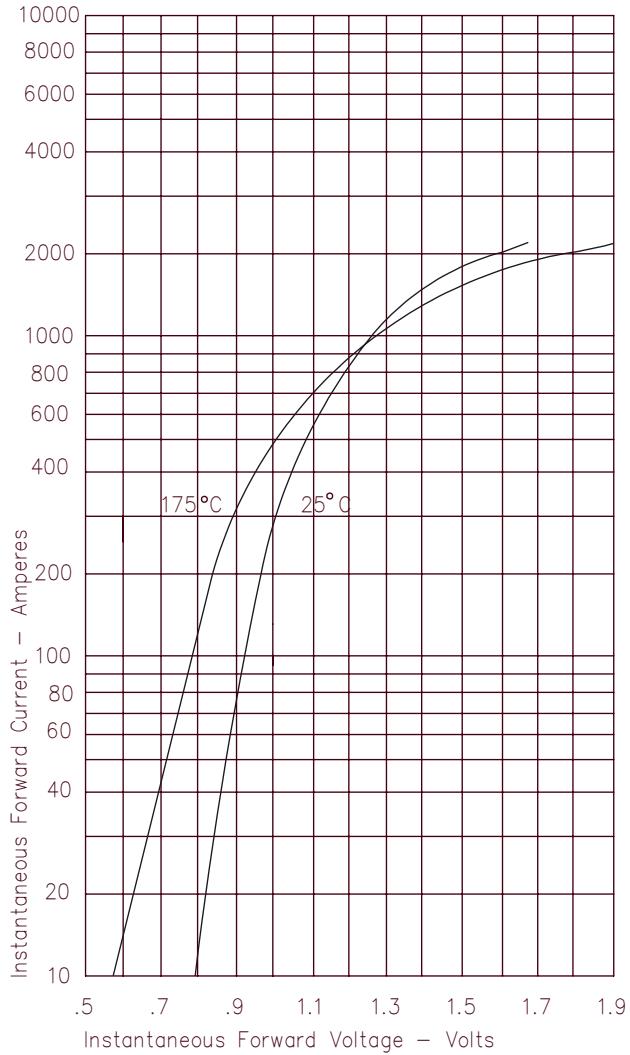


Figure 2  
Typical Reverse Characteristics – Per Leg

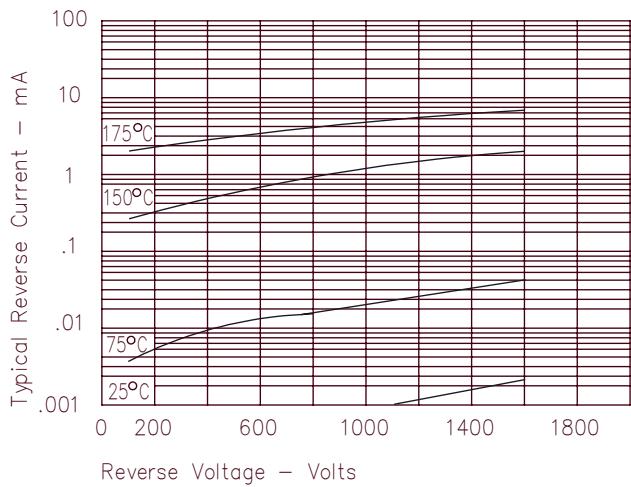


Figure 3  
Forward Current Derating – Per Leg

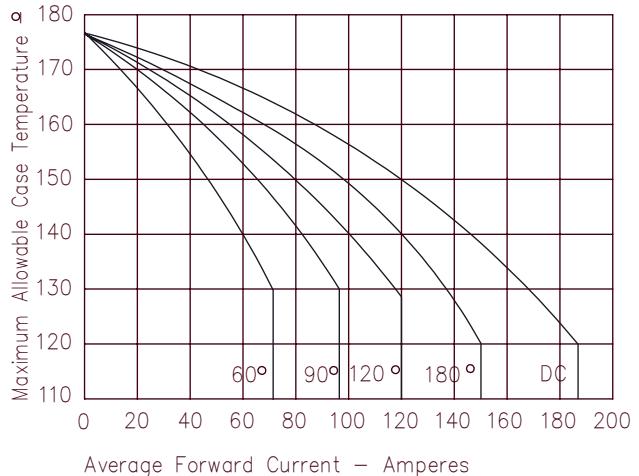


Figure 4  
Maximum Forward Power Dissipation – Per Leg

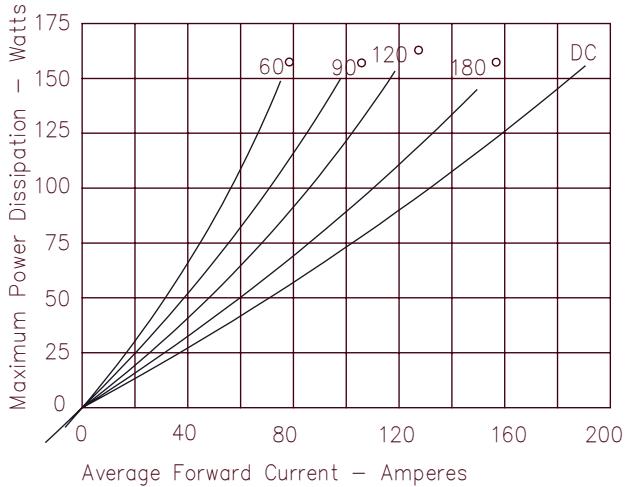


Figure 5  
Transient Thermal Impedance – Per Leg

