


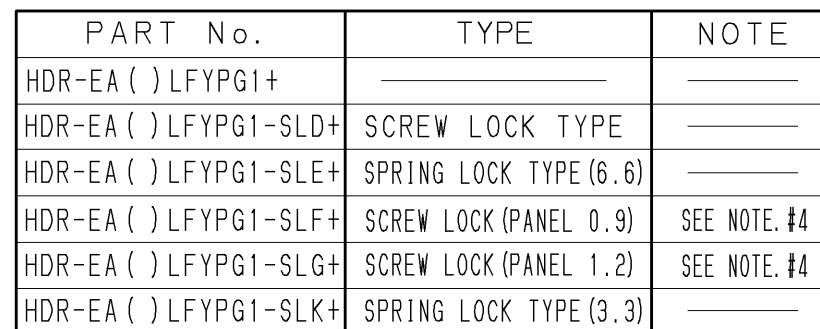

8

3.3

6.6

5.8



1.2

0.9

SPRING LOCK
TYPE


SCREW LOCK
TYPE M2x0.4

SCREW LOCK
TYPE M2x0.4
PANEL MOUNT

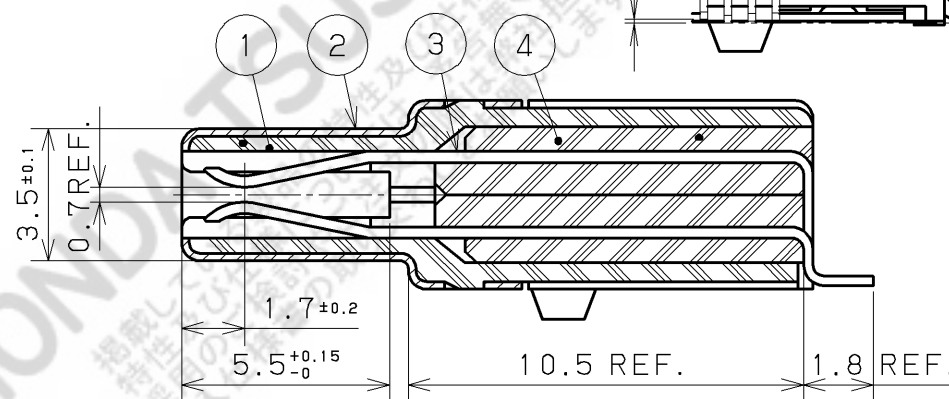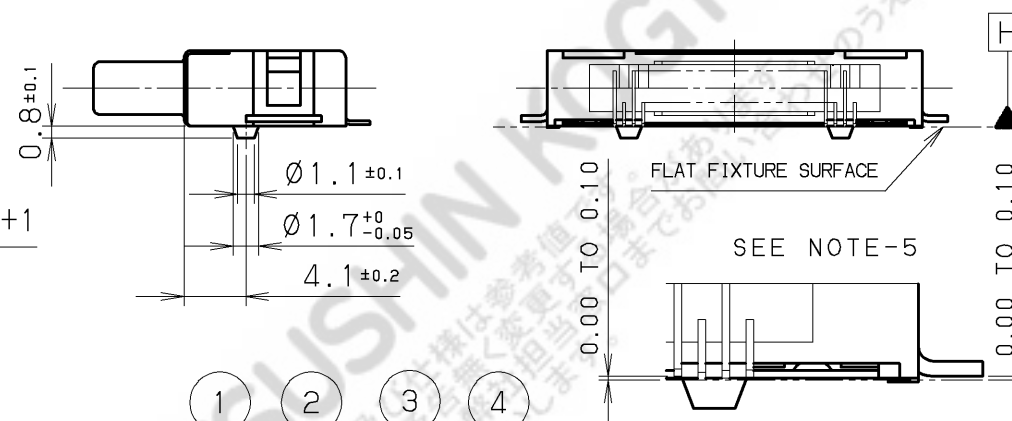

3				3	CONTACT	PHOSPHOR BRONZE	n	SEE NOTE #1	BLACK
2				2	SHELL	STEEL	1	NICKEL PLATING	
1				1	INSULATOR A	LCP (GF) 26 ^{pos.} PPS (GF) 14 ^{pos.}	1		UL 94V-0 BLACK


DATE Jul.12(2007)		SCALE 2 / 1		UNIT mm (INCH)		3RD. A. P		HONDA TSUSHIN KOGYO CO., LTD.						
APP. DATE&REV.														
DR.		DE.		CHK.		CHK.		APP.		NAME		0.8mm SPACING RIGHTANGLE FEMALE CONNECTOR		
Y.KATO		Y.KATO		—		C. NUNOKAWA		K. KASHIO		PART NO.		HDR-EA () LFYPG1 () +		REV.

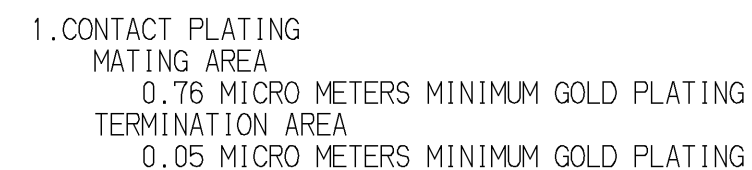

UNDERPLATING:NICKEL PLATING 1.3μm MIN.





2. MATING CONNECTOR
HDR-E () MAG+
HDR-E () MAG1+
3. SPECIFICATION
RATED CURRENT 0.5A
RATED VOLTAGE 125V AC (r. m. s.)
4. TWO LOCK SCREWS ARE
SUPPLIED WITH A CONNECTOR.
5. THE DIMENSION OF PIN TAIL'S LOWER SURFACE TO
DETUM 'H' SURFACE: 0.00 TO 0.10.
THE CONECTOR SHOULD BE ON FLAT FIXTURE SURFACE
WHEN THE DIMENSIONS ARE MEASURED.

HDR-EA26LFYPG1 () +	26	24.8	19.2	13.6	0.8×12=9.6	14	15.875	23.8
HDR-EA14LFYPG1 () +	14	20	14.4	8.8	0.8×6=4.8	9.2	8.255	19
PART NO.	n (NO. OF POS.)	A	B	C	D	E	F	G
DIMENSIONS								

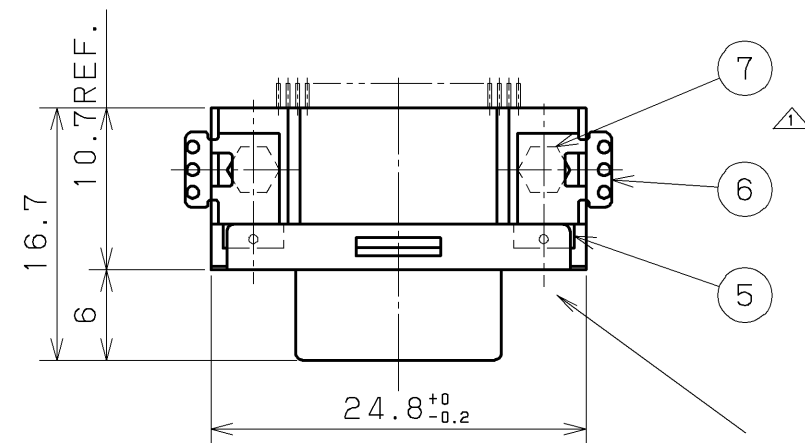

PART No.	TYPE	NOTE
HDR-EA26LFYPG1+		
HDR-EA26LFYPG1-SLD+	SCREW LOCK TYPE	
HDR-EA26LFYPG1-SLE+	SPRING LOCK TYPE (6.6)	
HDR-EA26LFYPG1-SLF+	SCREW LOCK (PANEL 0.9)	SEE NOTE. #4
HDR-EA26LFYPG1-SLG+	SCREW LOCK (PANEL 1.2)	SEE NOTE. #4
HDR-EA26LFYPG1-SLK+	SPRING LOCK TYPE (3.3)	

LOCK SCREWS

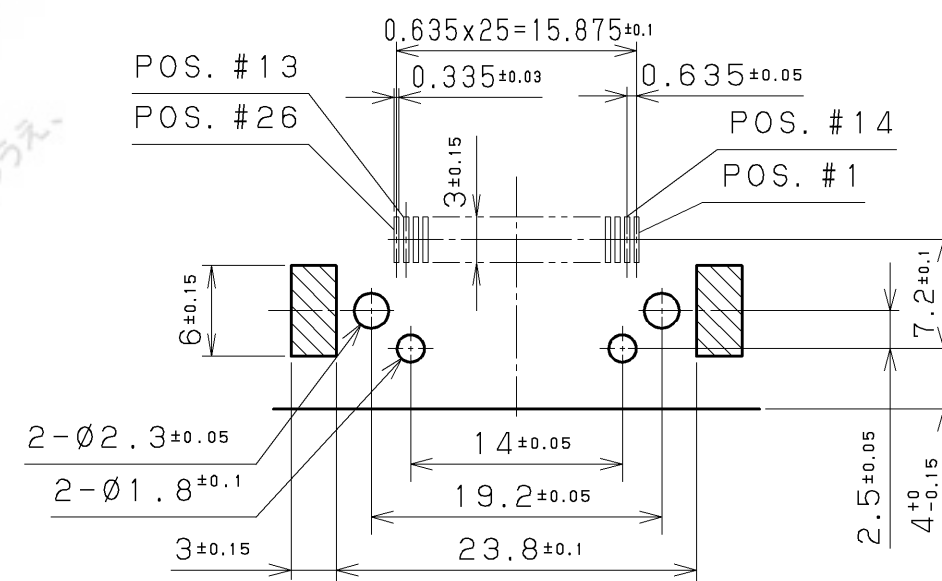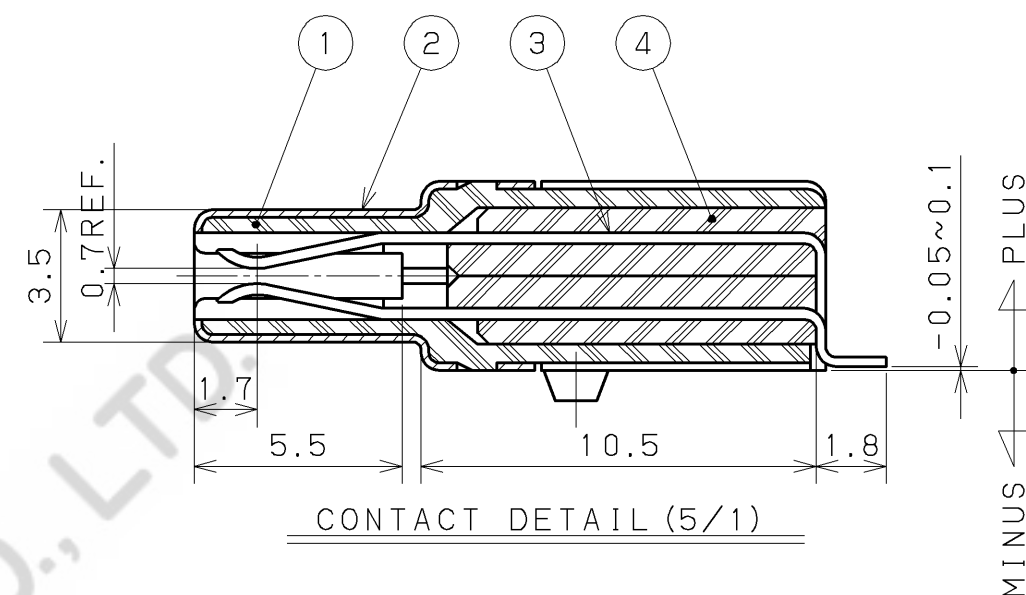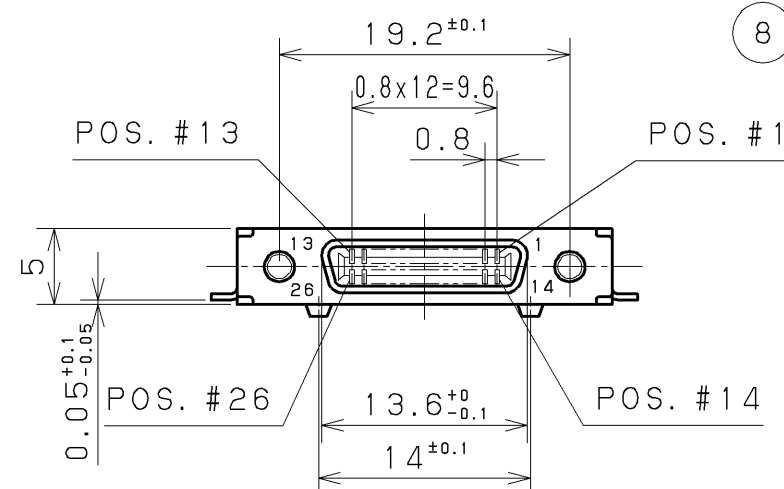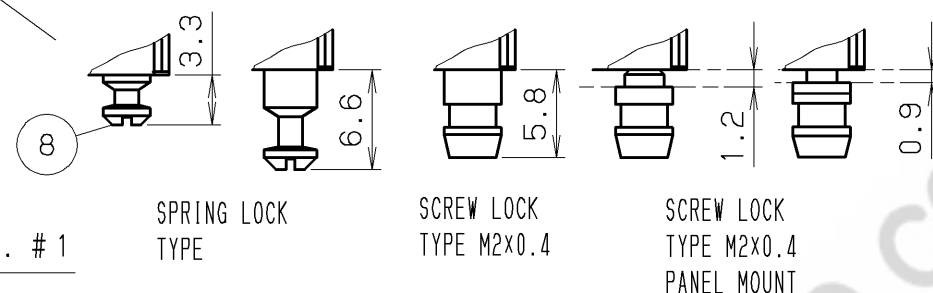


RECOMMENDED P. C. B. LAYOUT


8	LOCK SCREW	STEEL	2	NICKEL PLATING	M2x0.4
7	HEX. NUT	BRASS	2	NICKEL PLATING	M2x0.4
6	EARTH PLATE	PHOSPHOR BRONZE	2	NICKEL PLATING	
5	SQR. NUT	BRASS	2	NICKEL PLATING	M2x0.4
4	INSULATOR B	PPS (GF)	1		UL94V-0 BLACK COLOR
3	CONTACT	PHOSPHOR BRONZE	26	SEE NOTE #2	
2	SHELL	STEEL	1	NICKEL PLATING	
1	INSULATOR A	LCP (GF)	1		UL94V-0 BLACK COLOR

△3				3	CONTACT	PHOSPHOR BRONZE	26	SEE NOTE #2	————	BLACK COLOR		
△2				2	SHELL	STEEL	1	NICKEL PLATING	————			
△1	Apr. 11 2005	Y. K	Add	P/N	1	INSULATOR A	LCP (GF)	1	————	UL94V-0 BLACK COLOR		
LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE		
DATE		SCALE		UNIT		HONDA TSUSHIN KOGYO CO., LTD.						
May. 18. 2004		2 / 1		mm (INCH)							3RD. A. P	
APP. DATE&REV.												
DR.	DE.	CHK.	CHK.	APP.								
NAME		0.8mm SPACING 26POS. RIGHTANGLE FEMALE CONNECTOR										
PART NO.		HDR-EA26LFYPG1-() +								REV. 1A		
Y. KATO		Y. KATO		————		C. NUNOKAWA		H. EBIHARA				

- SPECIFICATION
RATED CURRENT 0.5A
RATED VOLTAGE 125V AC (r. m. s.)
- CONTACT PLATING
MATING AREA:0.76 MICRO METERS MINIMUM GOLD PLATING
TERMINATION AREA:0.05 MICRO METERS MINIMUM GOLD PLATING
UNDERPLATING:NICKEL PLATING
- MATING CONNECTOR
HDR-E26MAG1+
- TWO LOCK SCREWS (ITEM#8) ARE SUPPLIED WITH CONNECTOR.

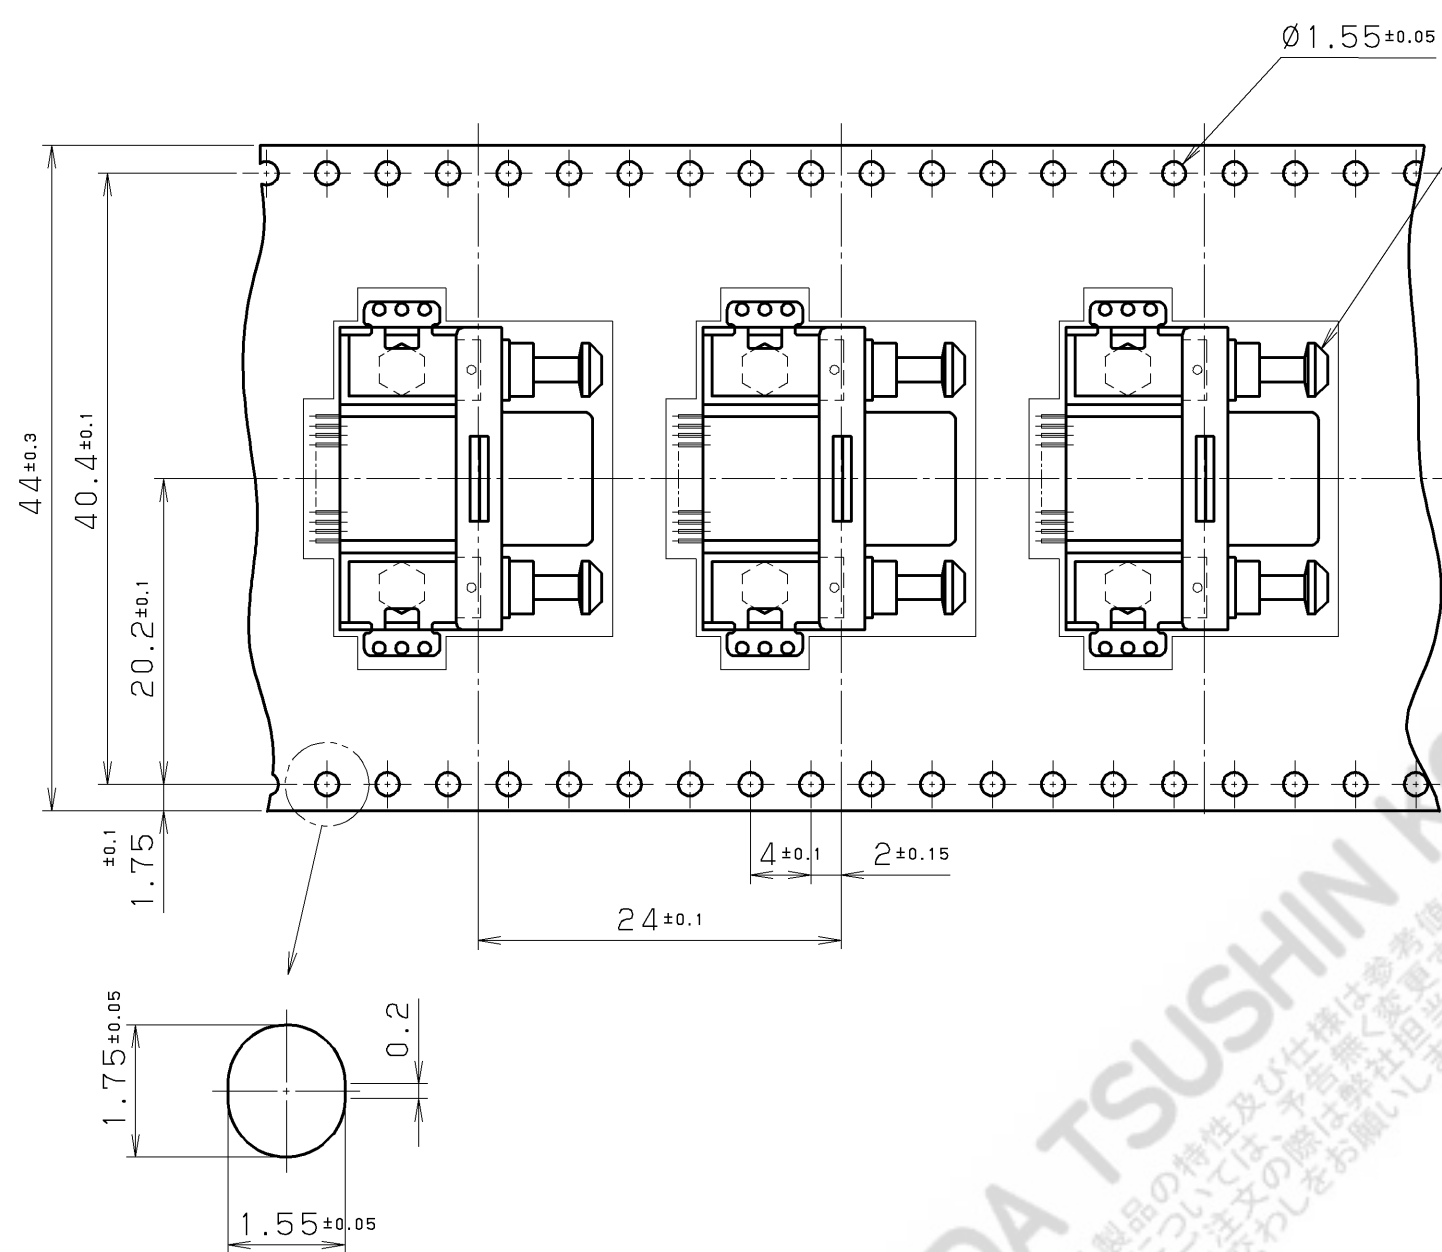


LOCKING DEVICE
(REFER TO TABLE)

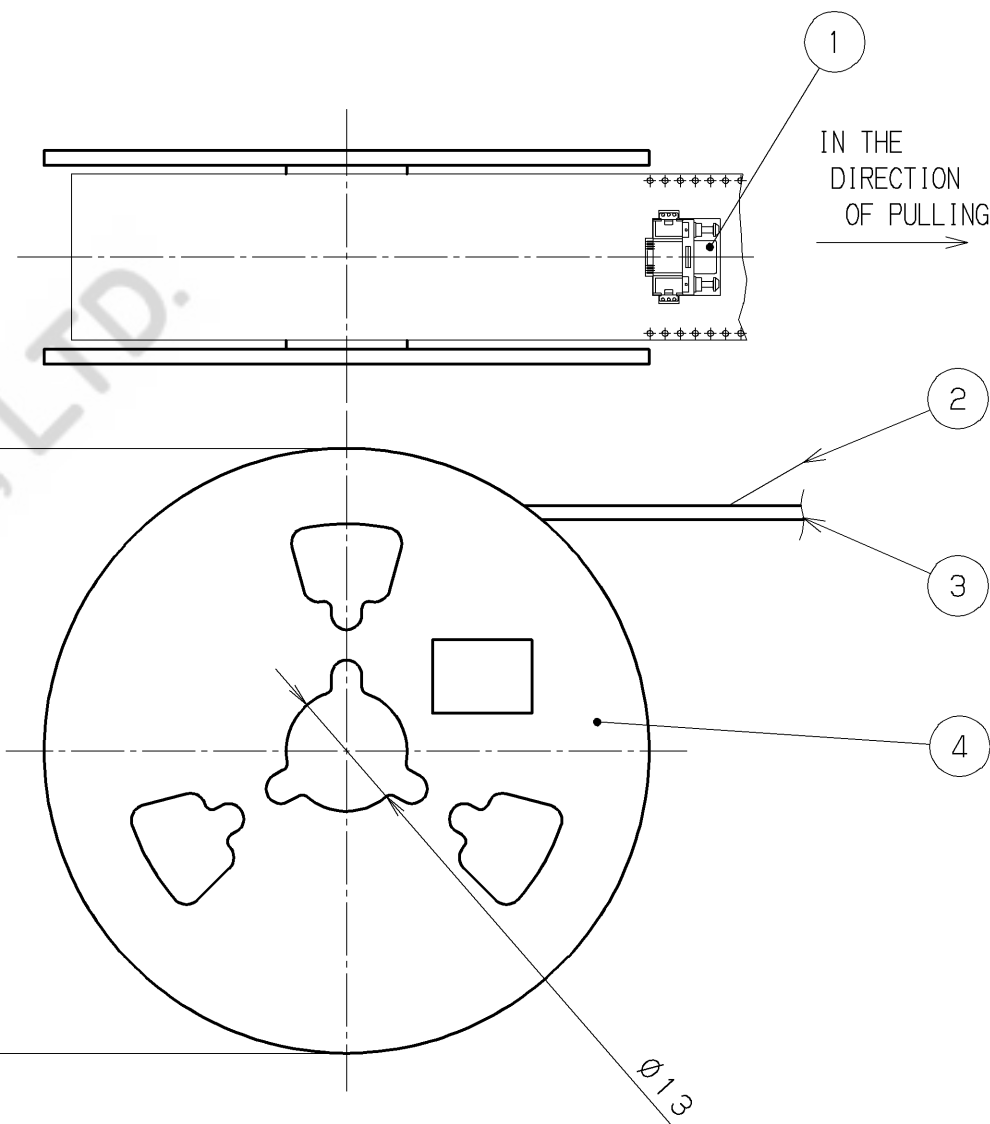

TABLE



PART No.	CONNECTOR PART No.	NOTE
HDR-EA14LFYPG1-TP+	HDR-EA14LFYPG1+	W/O LOCKING DEVICE
HDR-EA14LFYPG1-SLE-TP+	HDR-EA14LFYPG1-SLE+	WITH LOCKING DEVICE

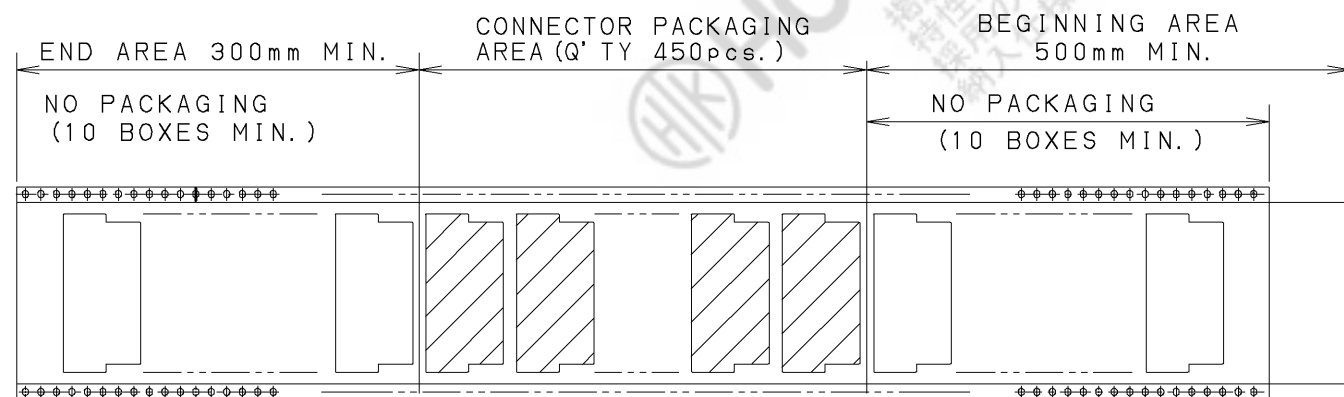

COMPOSITION OF PACKAGING


IN THE DIRECTION
OF PULLING

					4	REEL	PAPER	1		
△					3	EMBOSSD TAPE	P. P.			
△					2	COVER TAPE	P. E.			
△					1	CONNECTOR		450		SEE TABL
LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE Apr.2.2004		SCALE ×		UNIT mm (INCH)	3RD. A. P					
APP. DATE&REV.					HONDA TSUSHIN KOGYO CO., LTD.					
DR.		DE.		CHK.	CHK.	APP.	*HDR* TYPE 14POS. FEMALE CONNECTOR WITH EMBOSSD TAPE AND REEL			
Y. KATO		Y. KATO		—	C. NUNOKAWA	H. EBIHARA	PART NO.		HDR-EA14LFYPG1- () -TP+	

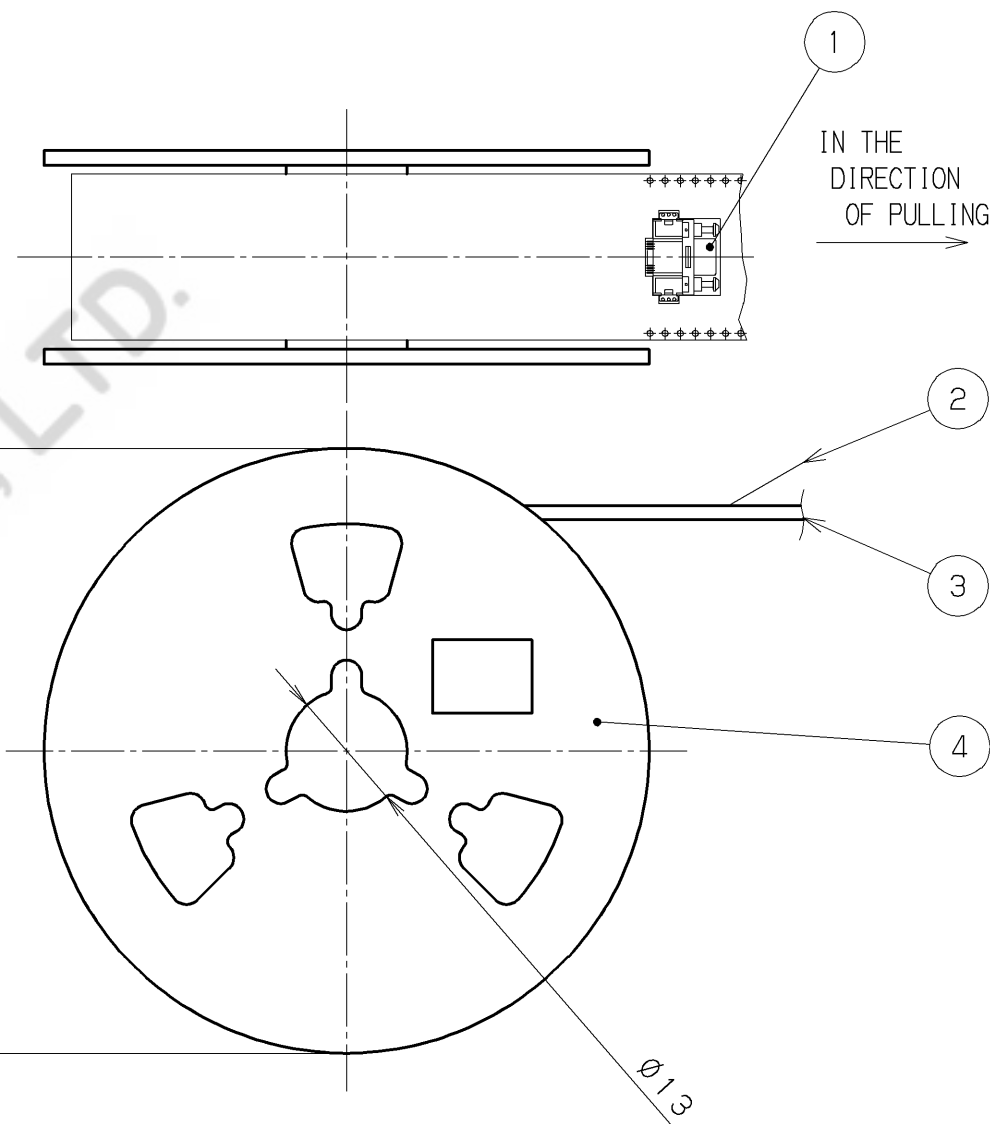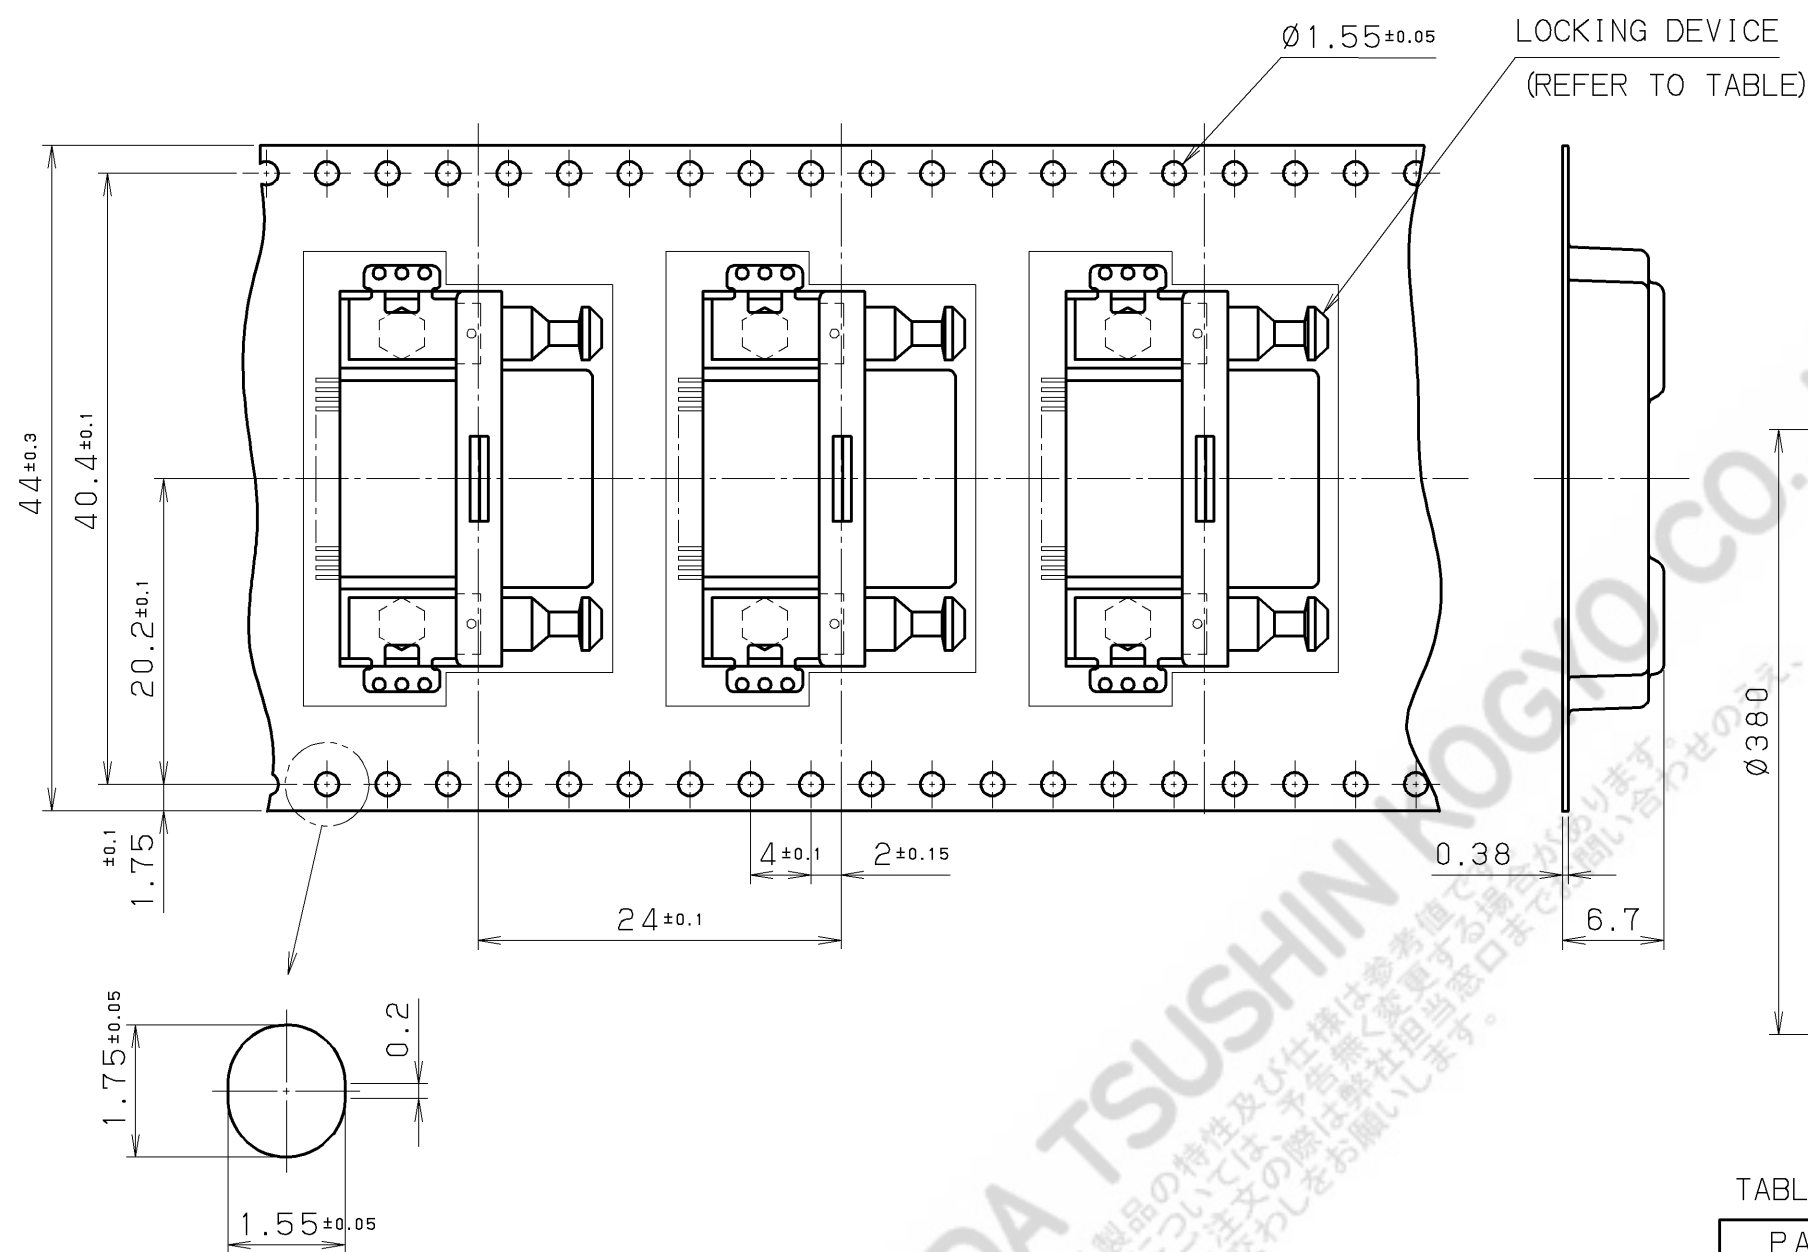

TABLE

PART No.	CONNECTOR PART No.	NOTE
HDR-EA26LFYPG1-TP+	HDR-EA26LFYPG1+	W/O LOCKING DEVICE
HDR-EA26LFYPG1-SLE-TP+	HDR-EA26LFYPG1-SLE+	WITH LOCKING DEVICE

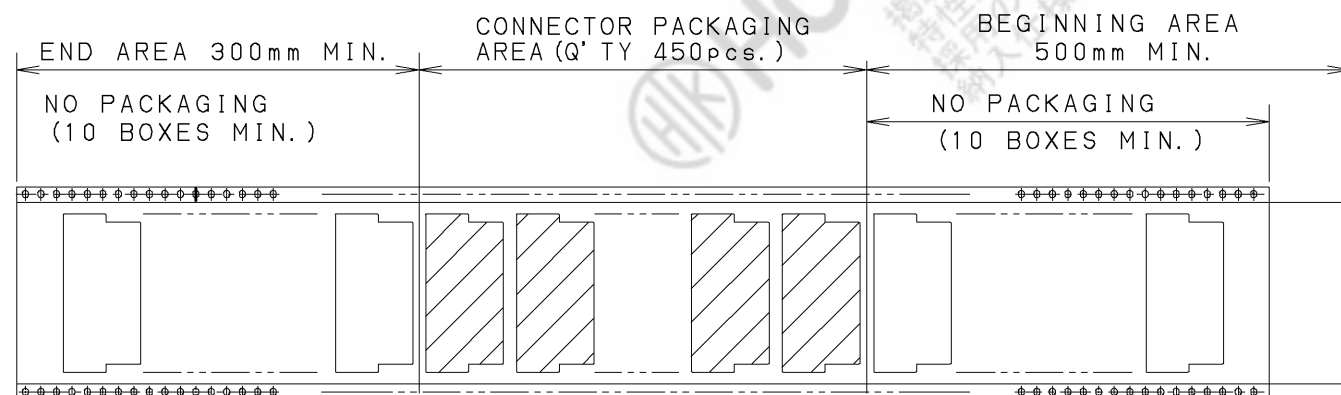

COMPOSITION OF PACKAGING

IN THE DIRECTION
OF PULLING

				4	REEL	PAPER	1	_____	_____	
Ⓐ				3	EMBOSSD TAPE	P. P.	—	_____	_____	
Ⓔ				2	COVER TAPE	P. E.	—	_____	_____	
Ⓐ				1	CONNECTOR	_____	450	_____	SEE TABL	
LTR.	DATE	BY	REV.	DESCRIPT	No.	PART NAME	MATERIAL	QTY	FINISH	NOTE
DATE May.18.2004		SCALE ×		UNIT mm (INCH)	3RD. A. P	HONDA TSUSHIN KOGYO CO., LTD.				
APP. DATE&REV.										
DR.	DE.	CHK.	CHK.	APP.	NAME		*HDR* TYPE 26POS. FEMALE CONNECTOR WITH EMBOSSD TAPE AND REEL			
Y. KATO	Y. KATO	—	C. NUNOKAWA	H. EBIHARA	PART NO.		HDR-EA26LFYPG1-()-TP+			RE