




Surface Mount Glass Passivated Zeners




DO-213AB

Zener Voltage 100 to 200V
Steady State Power 1.0W

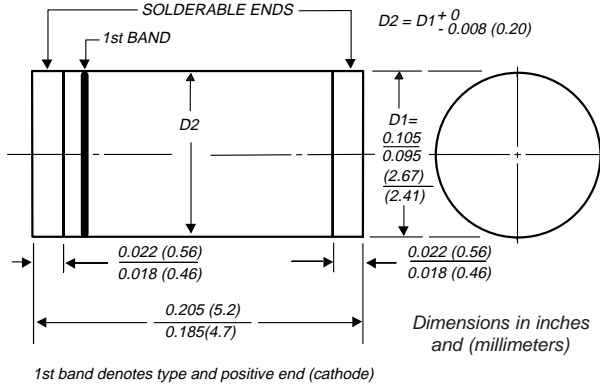

Mounting Pad Layout

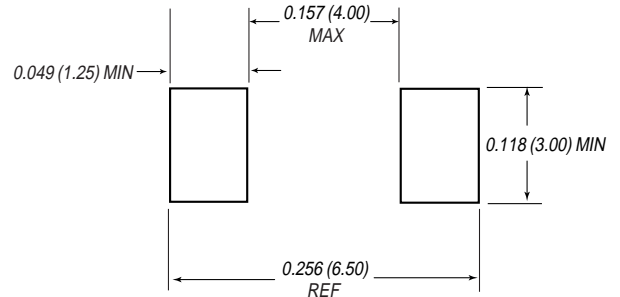

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mount applications
- Glass passivated junction
- Low Zener impedance
- Low regulation factor
- High temperature soldering guaranteed: 250°C/10 seconds at terminals

Mechanical Data

Case: JEDEC DO-213AB molded plastic body over passivated junction

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Red band denotes Zener diode and positive end (cathode)

Mounting Position: Any

Weight: 0.0046 oz., 0.116 g

Packaging codes/options:

26/5K per 13" Reel (12mm tape), 60K/box
46/1.5K per 7" Reel (12mm tape), 30K/box

Maximum Ratings and Electrical Characteristics (T_A = 25°C unless otherwise noted)

Operating junction and storage temperature range: T_J, T_{STG}: -55°C to +150°C

Type	Nominal Zener Voltage at I _{ZT} (Note 1) V _Z (V)	Test Current I _{ZT} (mA)	Maximum Zener Dynamic Impedance			Maximum DC Reverse Leakage Current at V _R		Maximum Surge Current (Note 2) I _{RM} (mAdc)	Max. Instantaneous Forward Voltage at 200mA V _F (V)
			Z _{KT} at I _{ZT} (Ω)	Z _{ZK} at I _{ZK}		I _R (μA)	V _R (V)		
				(Ω)	(mA)				
ZGL41-100	100	3.7	250	3100	0.25	1.0	76.0	10.0	1.5
ZGL41-110	110	3.4	300	4000	0.25	1.0	83.6	9.1	1.5
ZGL41-120	120	3.1	380	4500	0.25	1.0	91.2	8.3	1.5
ZGL41-130	130	2.9	450	5000	0.25	1.0	98.8	7.7	1.5
ZGL41-140	140	2.7	525	5500	0.25	1.0	106.4	7.1	1.5
ZGL41-150	150	2.5	600	6000	0.25	1.0	114.0	6.7	1.5
ZGL41-160	160	2.3	700	6500	0.25	1.0	121.6	6.3	1.5
ZGL41-170	170	2.2	800	6750	0.25	1.0	129.2	5.9	1.5
ZGL41-180	180	2.1	900	7000	0.25	1.0	136.9	5.6	1.5
ZGL41-190	190	2.0	1050	7500	0.25	1.0	144.4	5.3	1.5
ZGL41-200	200	1.9	1200	8000	0.25	1.0	152.0	5.0	1.5

Notes:

- (1) Standard voltage tolerance is ±10%, Suffix A = ±5%
- (2) Surge current is a non-repetitive, 8.3ms pulse width square wave or equivalent sine-wave superimposed on I_{ZT} per JEDEC Method
- (3) Maximum steady state power dissipation is 1.0 watt at T_T = 75°C

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Maximum Continuous Power Dissipation

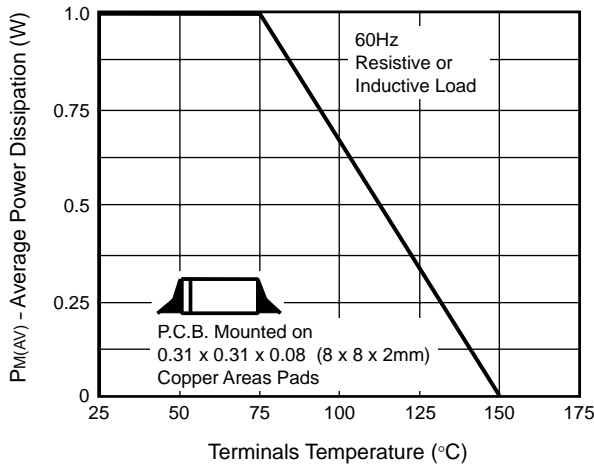


Fig. 2 – Typical Zener Impedance

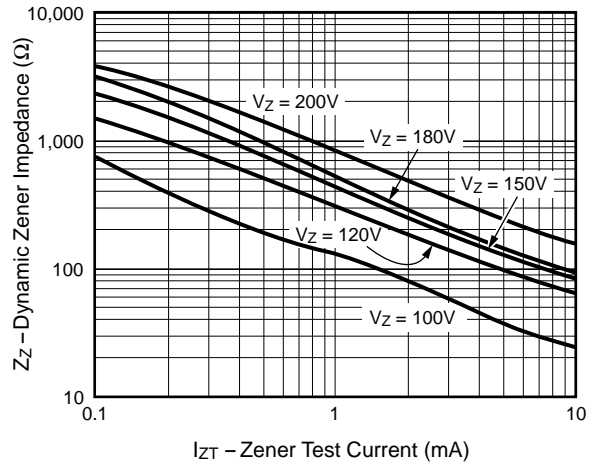


Fig. 3 – Typical Instantaneous Forward Characteristics

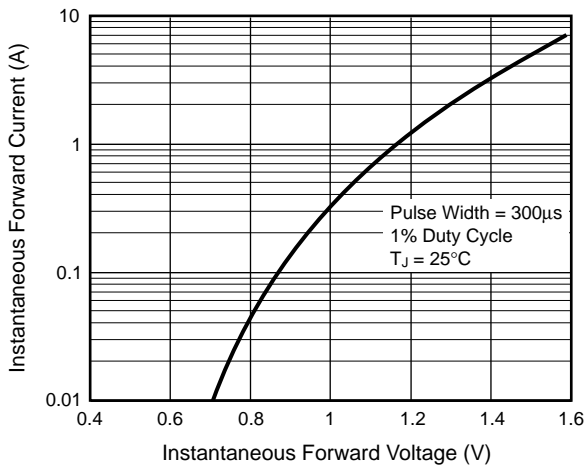


Fig. 4 – Typical Reverse Characteristics

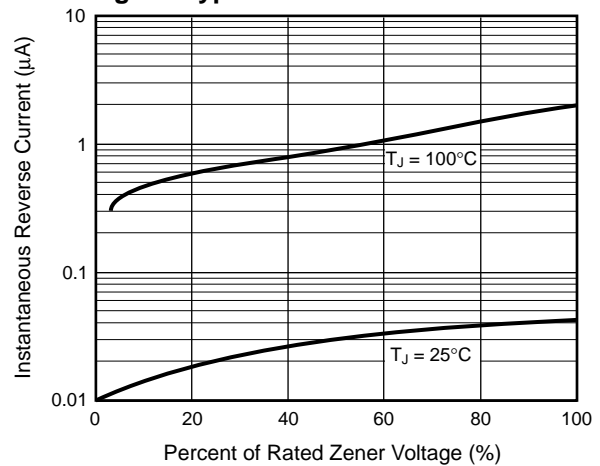


Fig. 5 – Steady State Power Derating Curve


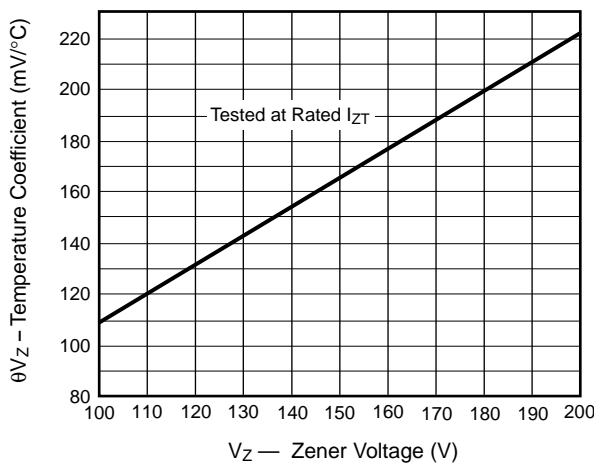


Fig. 6 – Typical Zener Voltage



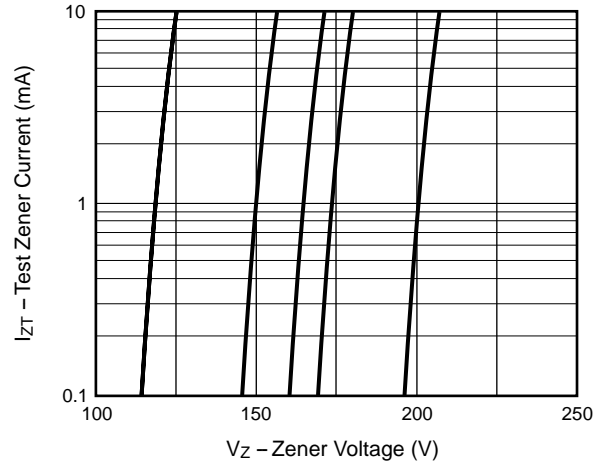

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.