


249-294  
249-300  
249-312

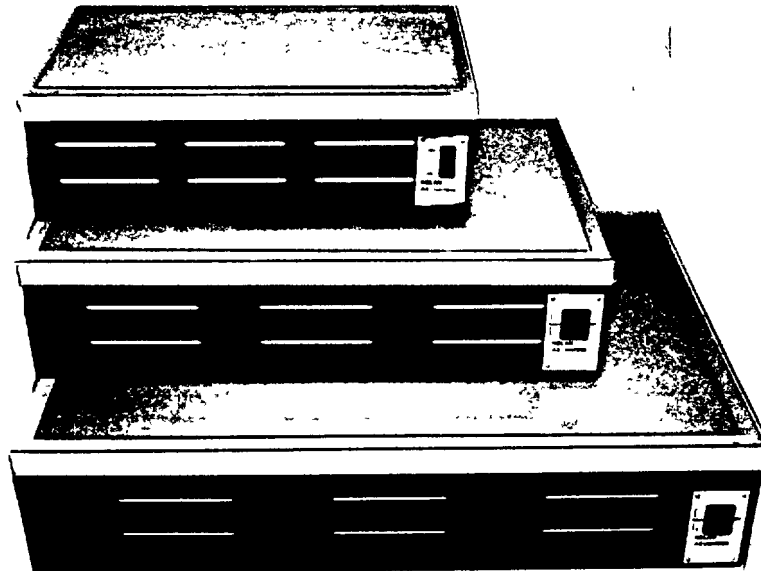

- ROBUST MILD STEEL CONSTRUCTION COATED WITH TWO TONE GREY TOUGH EPOXY PAINT
- PERSPEX DIFFUSER SCREEN MOUNTED BELOW TOUGHENED GLASS
- LOUVRES ON ALL SIDES TO ENSURE NATURAL AIR FLOW
- THREE STANDARD SIZES - A4, A3 AND A2

Illumination is provided by cool white fluorescent tubes with a perspex diffuser screen mounted below the toughened glass working surface, this provides even lighting over the whole viewing area. The small louvres on all sides ensures natural air flow.

All models are fitted with an ON/OFF rocker switch and 1.5 metres of mains lead. Operating voltage 240V AC.