



RO Associates Inc.
Casplan Drive
Sunnyvale, CA 94089

Tel: (408) 744-1450
Fax: (408) 744-1521
sales@roassoc.com

nV300LF NanoVerter Series

82.5-120 Watts
300 VDC Input
1/2 Brick

The nV300LF NanoVerter modules are high density DC-DC converters with an input range of 220-400 VDC. These supplies utilize metal PC boards, planar transformers, and surface mount construction to produce up to 120 watts in a small package with maximum reliability. The converters are board mountable with isolation of 4500 VDC (input to output), are fully encapsulated with base-plate cooled operation up to 100°C and have been qualified to international safety standards including the latest Lead-Free and RoHS requirements. These converters are ideal for customers who need reliable power conversion in a compact, conduction cooled package.

Operational Features

- Lead-Free / RoHS Compliant Design
- Small Footprint of only 2.30 x 2.40"
- Low Profile of only 0.42" or 0.32" (recessed mounting)
- Extremely Low Thermal Resistance
- -40 ~ 100°C Baseplate Operation
- Parallelable with Current Sharing
- Secondary Referenced Controls
- Auxiliary (housekeeping) Supply Output (PV pin)
- Logic On-Off
- Safety Agency Approved to UL/cUL 60950 (pending)
- Two Year Warranty

Typical Applications

- Aerospace
- Civil Avionics
- Military / COTS
- Industrial Control
- Telecommunication



Model Selection

Model Number	Input Range (VDC)	Output Voltage (VDC)	Output Current (Amps)
nV300-3LF	220-400	3.3	25
nV300-5LF	220-400	5.0	20
nV300-12LF	220-400	12	10
nV300-15LF	220-400	15	8
nV300-24LF	220-400	24	5



www.roassoc.com

nV300LF

82.5-120 Watt / 300 VDC Input / Half Brick



Specifications:

CATEGORY	SPECIFICATION	MIN	TYP	MAX	CONDITIONS
INPUT	Input voltage (VDC)	220	300	400	
	Input reflected ripple		10%		full load, nominal line
	Input ripple rejection		60dB		@120Hz
	No load power dissipation		1.5W		nominal line
	Logic disabled power in		0.8W		nominal line
OUTPUT	Set point accuracy		±0.5%	1%	full load
	Load regulation		0.1%	0.2%	0 - full load
	Line regulation		0.1%	0.2%	220-400 VDC
	Ripple / Noise		1%	3%	0 - 20MHz, 3.3V / 5V outputs
			1%	2%	0 - 20MHz, 12V / 15V / 24V outputs
	Trim range	±10%*			+5%, -10% for 3V
	Remote sense compensation	0.5V			OVP Limited on 3V model
	OVP (non shutdown auto. rec.)	105%	110%	120%	3V outputs
		110%	115%	130%	5V / 12V / 15V / 24V outputs
	Current Limit (auto recovery)		115%		full load
	Short circuit current		130%		full load
	Current sharing (automatic)		±1%	±5%	full load
	Transient response - Excursion		3%		20 - 80% FL, 1/2 A/μs
	Transient response - Recovery Time		50μs	200μs	Vout 1%
	Temperature drift			0.02%/°C	
EFFICIENCY	See Curves		80-86%		full load, nominal line
CONTROL	Turn on time (power applied)		150ms		full load, nominal line
	Logic turn on time		2ms		full load, nominal line
	Logic disabled current		20μA		
PV OUTPUT	2mA PV load		10.3V		main output @ full load
	10mA PV load		9.3V		main output @ full load
	2mA PV load		10.3V		main output disabled
ISOLATION	Input to output	4500VDC			
	Input to case	2500VDC			
	Output to case	500VDC			
	Input to output capacity	5200pF			
THERMAL	Operating temperature	-40°C		+100°C	Baseplate Temperature
	Automatic shut down temperature	+100°C	+105°C	+110°C	Baseplate Temperature
	Thermal resistance case to ambient		6.6 °C/watt		
	Storage temperature	-55°C		+110°C	Ambient Temperature
WEIGHT	3.4oz. (96 grams)				
SIZE	0.42 x 2.40 x 2.30" / (10.70 x 60.96 x 58.42mm)				


nV300LF

82.5-120 Watt / 300 VDC Input / Half Brick




Efficiency Curves

(300VDC Nominal Input)

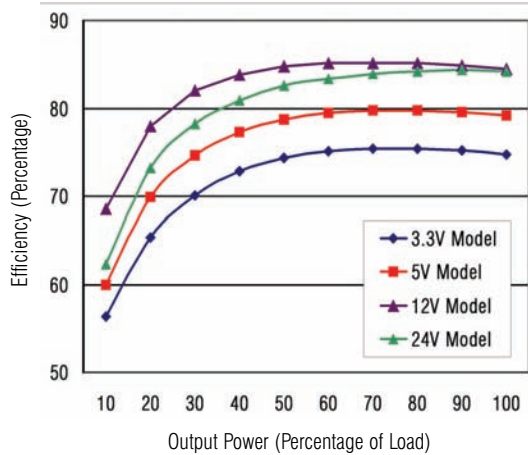


Output Ripple

5V Model, 300V Input, 20A Output

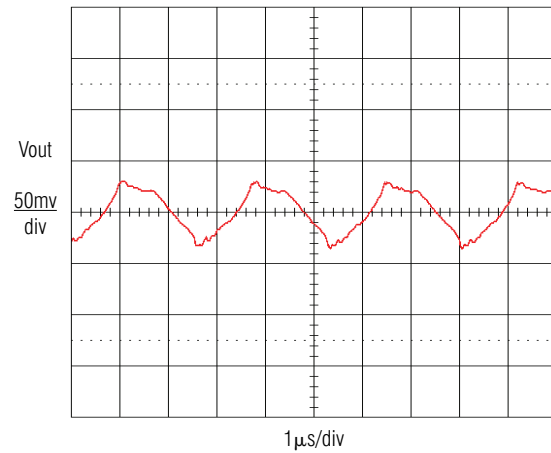


Transient Response

5V Model, 4-16-4A, Current Slew Rate 0.5/μs

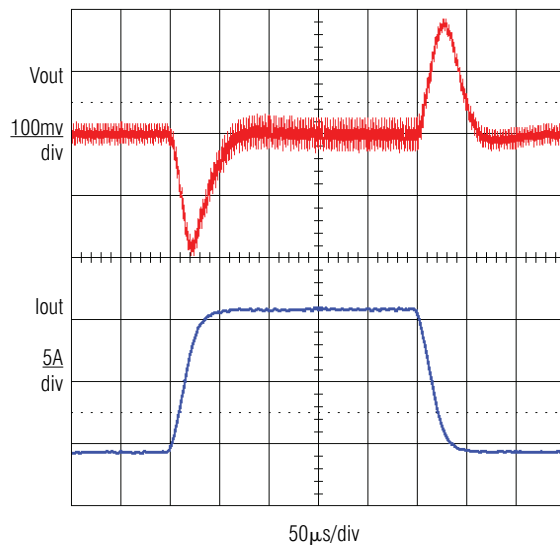

Thermal Performance

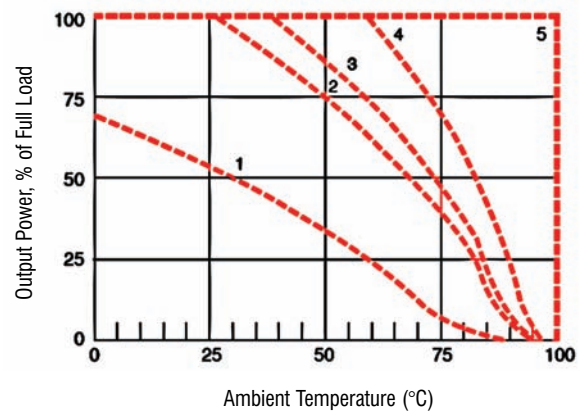

A wide variety of evaluation boards are available for your evaluation requirements. Our application notes provide circuit design and board layout details to simplify your design processes.

Our experienced application engineering team is available for "free engineering evaluation" of your schematic and board layout to ensure your design is right the first time.



RO Associates Inc.
246 Caspian Drive
Sunnyvale, CA 94089

roassoc.com


Tel: (408) 744-1450
Fax: (408) 744-1521
sales@roassociates.com

nV300LF

82.5-120 Watt / 300 VDC Input / Half Brick



Mechanical Drawing

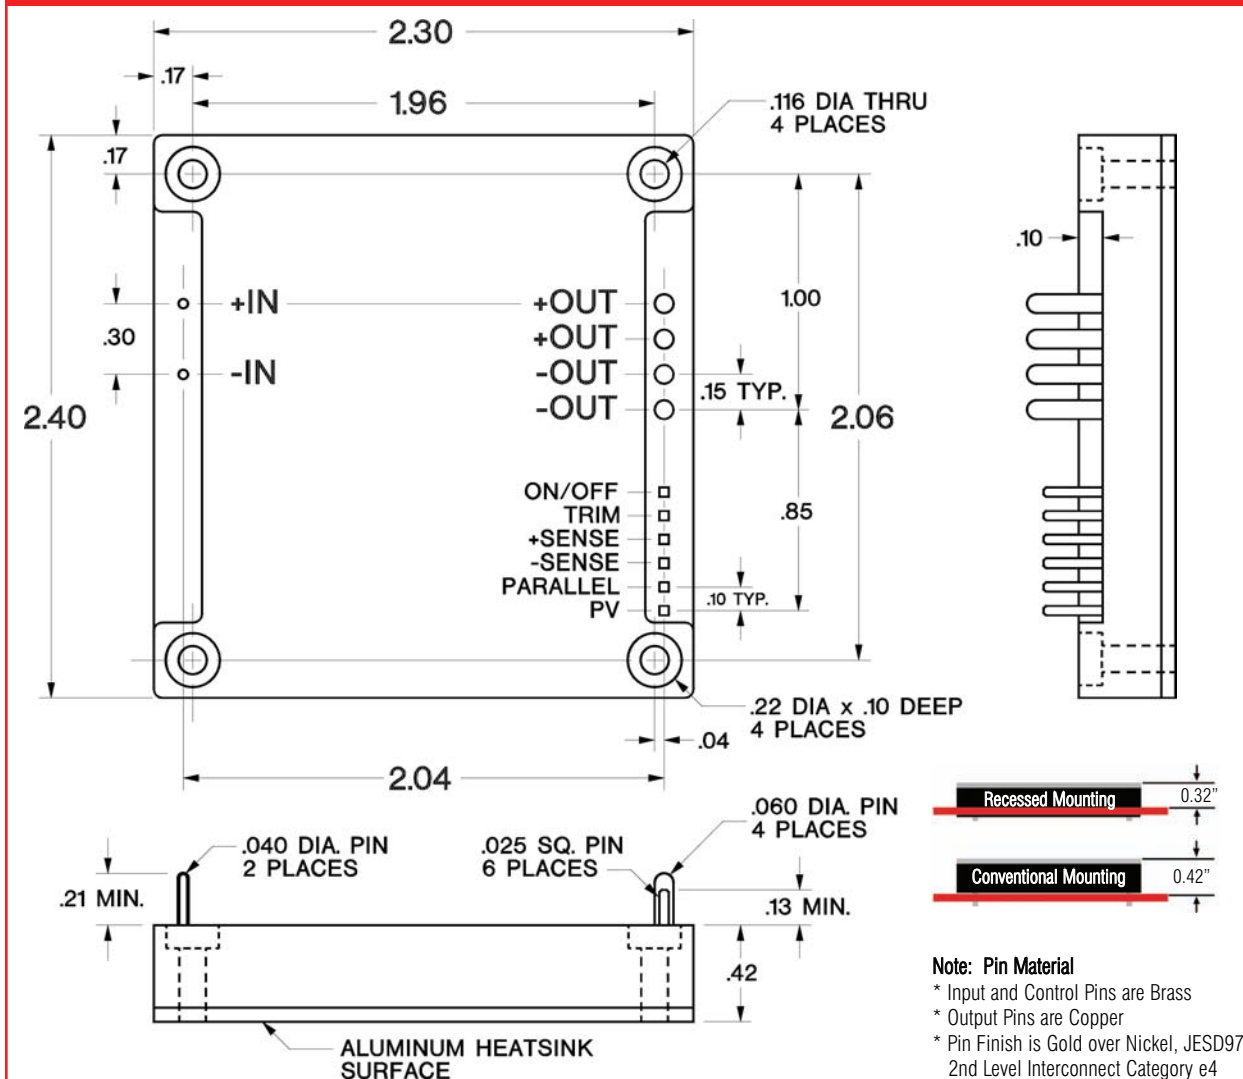

Note:

Specifications are subject to change without notice

RO Associates Inc.
246 Caspian Drive
Sunnyvale, CA 94089

roassoc.com

RO Associates is a subsidiary of **EMRISE** Corporation, Rancho Cucamonga, CA 91730

REV 060223-A

Tel: (408) 744-1450
Fax: (408) 744-1521
sales@roassociates.com