

Insulated Precision Wirewound Resistors Axial Leads



In wirewound precision resistors, the RLP series holds a leading position in professional applications whenever an excellent stability of the ohmic value and a correspondingly low temperature coefficient are required at the same time.



The RLP model resistors comply with the most stringent requirements of the NF C 83-210 specification. The series consists of 5 models covering the power range from 1 W to 10 W.

Non-inductive versions can be supplied on request by specifying RLP-NI. For higher power dissipations, the use of RH series resistors is recommended.

FEATURES

- 1 Watt to 10 Watt at 25 °C
- CECC 40201-006
- Conforms to NF C 83-210
- Excellent stability
- High power
- Low ohmic values
- Low temperature coefficient
- Electrical insulation
- Climatic protection

DIMENSIONS in millimeters

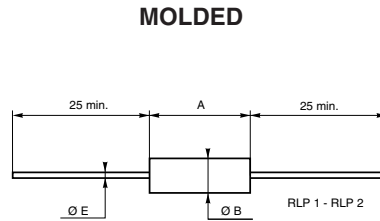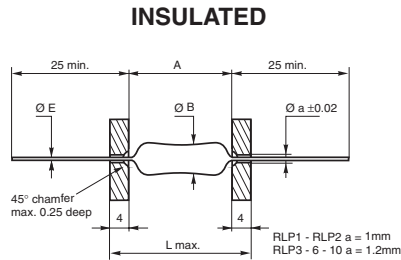

DIMENSIONS in millimeters					
SERIES AND STYLE	MOLDED		INSULATED		
	RLP 1	RLP 2	RLP 3	RLP 6	RLP 10
A max.	7	10.2	14	23.82	46.78
Ø B	2.5	4.0	5.54	8.71	10.32
R > 0.15 Ω max. R ≤ 0.15 Ω			6	9	11
E ± 0.1	0.6	0.6	0.8	0.8	0.8
Weight in g	0.27	0.48	1.3	3.4	8.6

TECHNICAL SPECIFICATIONS						
VISHAY SFERNICE SERIES AND STYLE		RLP1	RLP2	RLP3	RLP6	RLP10
NF C 83-210		RP8	RP7	RP4	RP5	RP6
CECC 40201-006		A	B	C	D	E
Power Rating at + 25 °C	VISHAY SFERNICE Limits	1 W	2 W	3 W	6 W	10 W
Ohmic Range in Relation to Tolerance	± 5 % E24	0.05 Ω 2.2 kΩ	0.025 Ω 6.8 kΩ	0.01 Ω 15 kΩ	0.02 Ω 59 kΩ	0.06 Ω 150 kΩ
	± 2 % E48	0.05 Ω 2.2 kΩ	0.025 Ω 6.8 kΩ	0.01 Ω 15 kΩ	0.02 Ω 59 kΩ	0.06 Ω 150 kΩ
	± 1 % E96	0.05 Ω 2.2 kΩ	0.025 Ω 6.8 kΩ	0.01 Ω 15 kΩ	0.02 Ω 59 kΩ	0.06 Ω 150 kΩ
	± 0.5 % E96	0.4 Ω 2.2 kΩ	0.4 Ω 6.8 kΩ	0.3 Ω 15 kΩ	0.3 Ω 59 kΩ	0.3 Ω 150 kΩ
	± 0.1 % E96	Please consult VISHAY SFERNICE				
Qualified Ohmic Range NF C 83-210		1 Ω 470 Ω	0.2 Ω 1.78 kΩ	0.1 Ω 3.57 kΩ	0.1 Ω 12.1 kΩ	0.1 Ω 40.2 kΩ
Limiting Element Voltage		50 V	120 V	200 V	300 V	720 V
Critical Resistance		out of nominal ohmic range			17800 Ω	51100 Ω

Undergoes European Quality Insurance System (CECC)



PERFORMANCE				
TESTS	CONDITIONS	REQUIREMENTS		TYPICAL VALUES AND DRIFTS
		MIL-R-26 E	NF C 83-210	
Dielectric W/s Voltage	500 VRMS for RLP1-2-3 1000 VRMS for RLP6-10	± (0.1 % + 0.05 Ω)	–	± (0.05 % + 0.05 Ω)
Short Time Overload	5 Pn/5 s for Pn < 5 W 10 Pn/5 s for Pn ≥ 5 W	± (0.2 % + 0.05 Ω)	± 0.25 % + 0.05 Ω	± (0.1 % + 0.05 Ω)
Climatic Sequence	NF C 83-210 fasc. 19A – 55 °C/+ 200 °C 5 cycles	–	± 0.5 % + 0.05 Ω Insulation R > 100MΩ	± (0.2 % + 0.05 Ω) Ins. resistance > 10 ³ MΩ
Humidity (Steady State)	NF C 83-210 fasc. 3A 56 days 95 % R.H.	–	± 0.5 % + 0.05 Ω Insulation R > 100MΩ	± (0.25 % + 0.05 Ω) Ins. resistance > 10 ³ MΩ
Vibration	MIL-STD-202 Method 204 - Test D: 20g 10/2000Hz	± (0.1 % + 0.05 Ω)	± 0.25 % + 0.05 Ω	± (0.05 % + 0.05 Ω)
Load Life	MIL-STD-202 Method 108 Pn 1000h	± (0.5 % + 0.05 Ω)	± 0.5 % + 0.05 Ω Insulation R ≥ 1GΩ	± (0.3 % + 0.05 Ω)
Moisture Resistance	MIL-STD-202 Method 106	± (0.2 % + 0.05 Ω) Insulation resistance >100M	–	± (1 % + 0.05 Ω) Ins. resistance > 10 ³ MΩ
High Temperature	250 h at + 275 °C	± (0.5 % + 0.05 Ω)	± 0.5 % + 0.05 Ω Insulation R ≥ 1GΩ	± (0.25 % + 0.05 Ω)
Shock	MIL-STD-202 100g Method 205 - Test C	± (0.1% + 0.05Ω)	± 0.25% + 0.05Ω	± (0.05% + 0.05Ω)


TEMPERATURE COEFFICIENT IN THE RANGE - 55° + 200 °C			
OHMIC RANGE	LIMITS		TYPICAL VALUE
	NF C	MIL	
< 1 Ω	± 100 ppm/°C	± 90 ppm/°C	± 50 ppm/°C
1 Ω to < 10 Ω	± 50 ppm/°C	± 50 ppm/°C	
≥ 10 Ω	± 25 ppm/°C	± 30 ppm/°C	+ 0 to – 20 ppm/°C

STABILITY AND POWER RATING

Stability changes slightly according to power rating and ambient temperature. This fact is especially important for users needing a life drift lower than the initial resistance tolerance. Typical drifts, after 2000h life test made under the 90'/30' conditions and at an ambient temperature of 25°C, are:


	RLP1	RLP2	RLP3	RLP6	RLP10	$\frac{\Delta R}{R}$ %
Pn	1 W	2 W	3 W	5 W	10 W	0.3
0.5Pn	0.5 W	1 W	1.5 W	2.5 W	5 W	0.15

INDUCTANCE (Example)

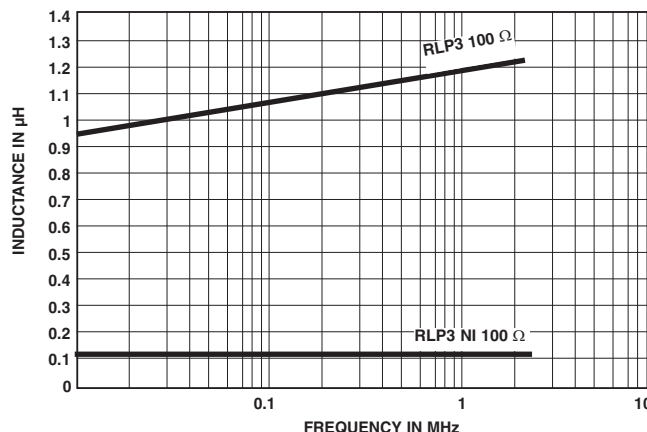




POWER RATING CHART

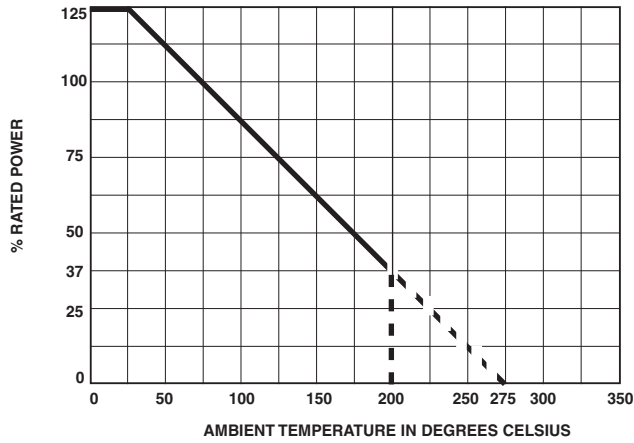

TEMPERATURE RISE

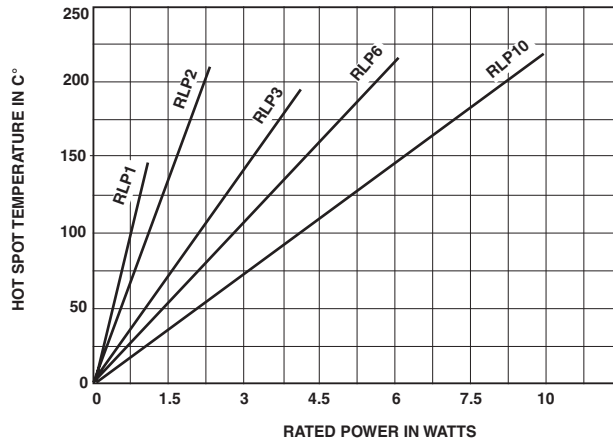

MARKING

SFERNICE trademark, series, style, CECC style (if applicable) nominal resistance (in Ω , k Ω), tolerance (in %), manufacturing date.

ORDERING INFORMATION						
RLP	3			4.7 k Ω	$\pm 1\%$	
MODEL	STYLE	NON INDUCTIVE WINDING	SPECIAL DESIGN	OHMIC VALUE	TOLERANCE	PACKAGING
		Optional	Method N° Optional	Custom items are subject to extra-charge and min. order. Please see price list.		Optional
		(NI)				



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.