

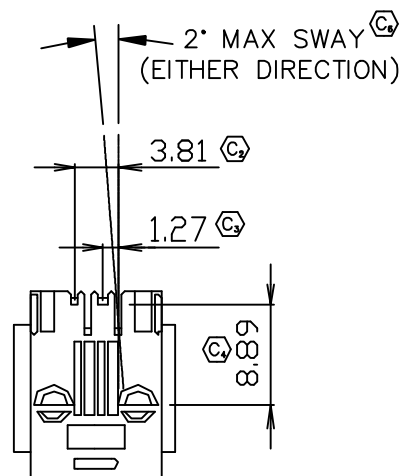
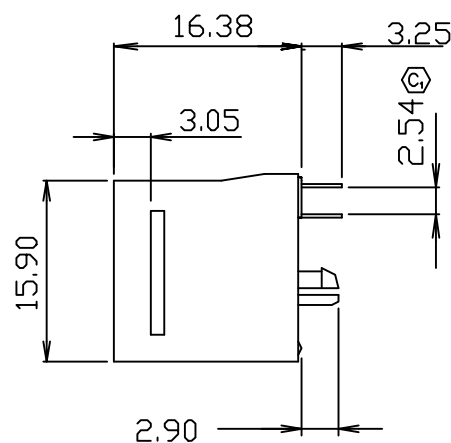


REVISION G

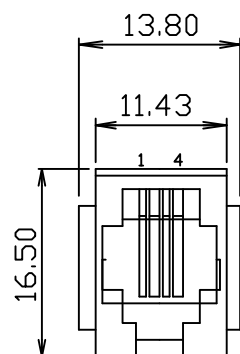

SUGGESTED PANEL CUTOUT DIMENSIONS

MODS-E-4P4C-X-X

TYPE

-E

POSITIONS/CONTACTS

-4P4C: 4 Pos/4 Con

E&I OPTION

-R: RoHS COMPLIANT


PLATING

-G: .000015' Gold

-H: .000030' Gold

-E: .000050' Gold

(SEE NOTE 3)

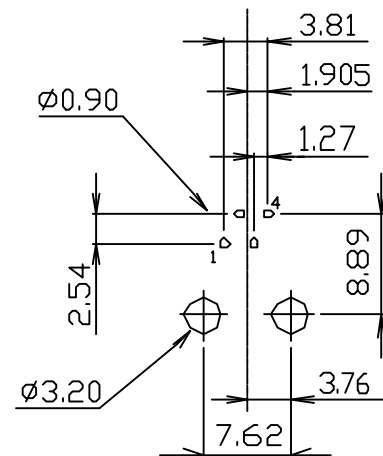

PCB LAYOUT

NOTES:

1. C REPRESENTS CRITICAL DIMENSION.
2. CRITICAL DIMENSIONS ON PCB LAYOUT APPLY TO THE ASSEMBLY
3. PLATING APPLIES TO MATING AREA, GOLD FLASH ON TAILS.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MM.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: $\pm .25$ 2°
.XXX: $\pm .13$
.XXXX: $\pm .05$

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC INC. AND SHALL NOT BE
REPRODUCED OR TRANSFERRED TO
OTHER DOCUMENTS OR DISCLOSED TO
OTHERS OR USED FOR ANY PURPOSE
OTHER THAN THAT FOR WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED
WRITTEN CONSENT OF SAMTEC INC.

samtec

520 PARK EAST BLVD. NEW ALBANY, IN 47150
(812) 944-6733 P.O. BOX 1147 TWX: 810-540-4085

DO NOT SCALE DRAWING
INSULATOR: Nylon 46
SPRING WIRE: .35mm Phos Bronze

SHEET SCALE: 1:2

DESCRIPTION:
RJ11 or RJ12 Top Entry PCB Jack

DWG. NO.

MODS-E-4P4C-X-X

BY: J. Riley 05/11/04 SHEET 1 OF 1

MAX FLASH ALLOWED: .051
MAX GATE VESTIGE: .051
MISC\MKGT

CODE: 55322