




Series 89 Nanominiature Connectors Single Row Vertical Surface Mount PCB 890-010 and -011

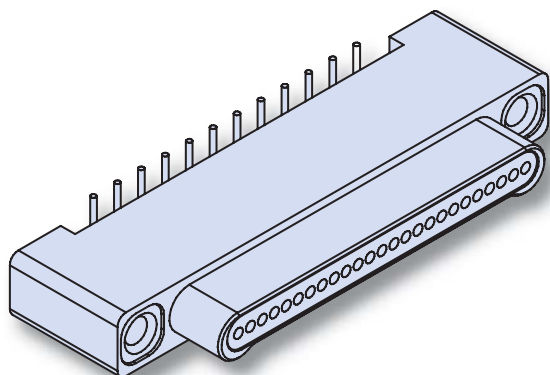

Vertical SMT PCB Nano Connectors feature gold alloy NanoPin contacts. These nanominiature connectors offer premium performance and reliability for demanding applications. Available with #0-80 threaded inserts, or with jackscrews for use with flexible circuits.

Pre-Tinned PC Tails are coated with Sn63Pb37 tin-lead for excellent solderability.

Choose Aluminum, Titanium or Stainless Steel Shells in seven layouts from 9 to 51 contacts. Complies to the requirements of MIL-DTL-32139. These connectors are intermateable with any corresponding Glenair Series 890 single row metal shell nanominiature connector.

HOW TO ORDER VERTICAL SMT PCB CONNECTORS

Series	Insert Arrangement/ Contact Type	Shell Material and Finish	Termination Type	Hardware
890-010 Plug, Pin Contacts, Single Row, Vertical SMT Nanominiature	Plugs (890-010) 9P 15P 21P 25P 31P 37P 51P	A1 Aluminum Shell, Cadmium Plating A2 Aluminum Shell, Electroless Nickel Plating	BSS "Board Straight Surface Mount"	T Threaded Inserts, #0-80 Female
890-011 Receptacle, Socket Contacts, Single Row, Vertical SMT Nanominiature	Receptacles (890-011) 9S 15S 21S 25S 31S 37S 51S	T Titanium Shell, Unplated S Stainless Steel Shell, Passivated		
Sample Part Number				
890-010	- 37P	A1	-BSS	T

MATERIALS AND FINISHES

Connector Shell	See Ordering Information
Insulator	Liquid Crystal Polymer (LCP), 30% Glass-Filled
Contacts	Gold Alloy, Unplated
Hardware	300 Series Stainless Steel
PC Tails	#30 (.010 Dia.) Copper Wire, Solder Dipped
PCB Trays	Liquid Crystal Polymer (LCP) or Epoxy
Encapsulant	Epoxy

SPECIFICATIONS


Durability	200 Cycles Minimum
Current Rating	1 AMP Maximum
Voltage Rating (DWV)	300 VAC RMS Sea Level
Insulation Resistance	5000 Megohms Minimum
Operating Temperature	-55° C. to +125° C.
Contact Resistance	71 mV. @1 AMP #30 AWG Wire
Thermal Vacuum Outgassing	1.0% Max TML, 0.1% Max.

Series 89 Nanominiature Connectors Single Row Vertical Surface Mount PCB 890-010 and -011




SINGLE ROW NANO VERTICAL SMT DIMENSIONS

Plug (Pin) Connectors

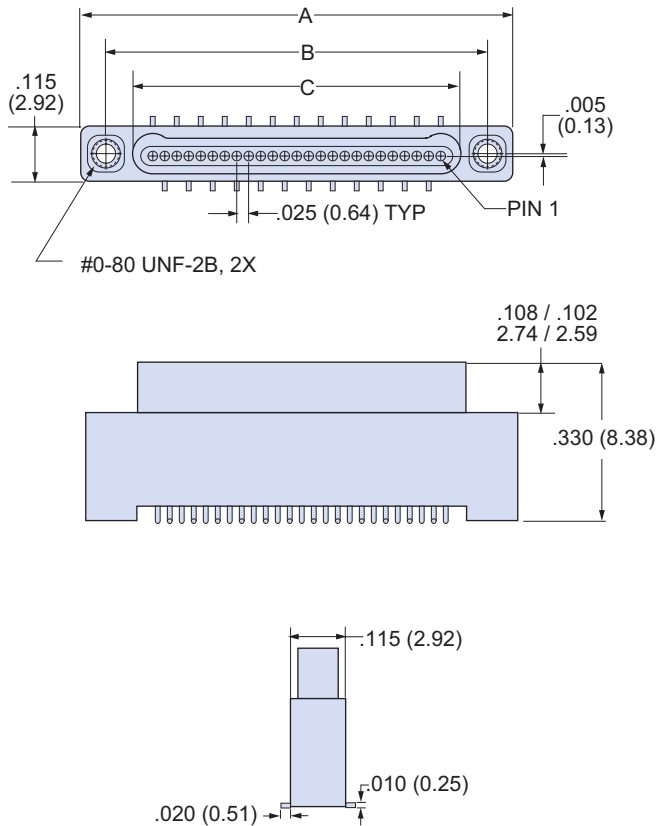

Receptacle (Socket) Connectors

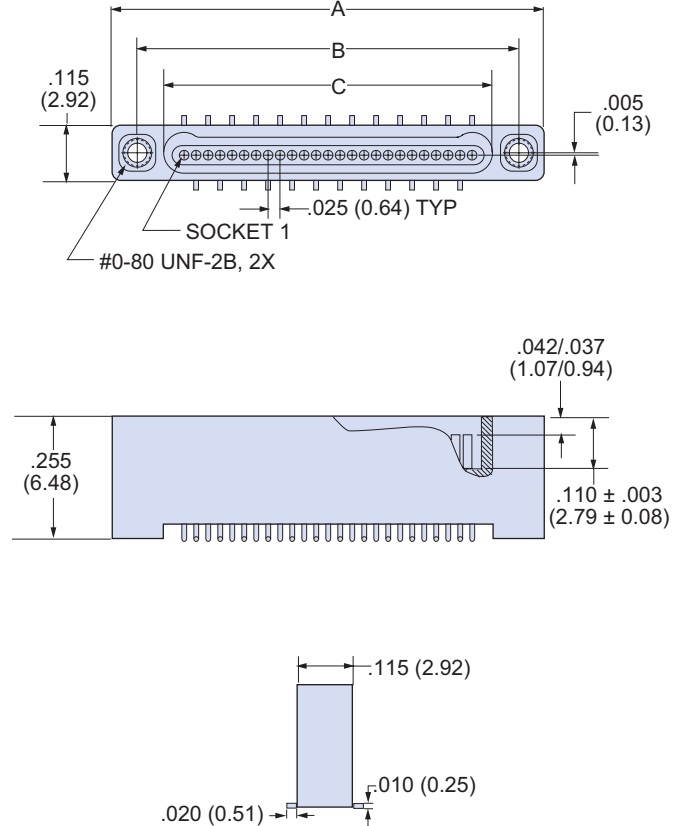


Layout	A Dimension		B Basic Dimension		C Basic Dimension	
	In.	mm.	In.	mm.	In.	mm.
9P	.500	12.70	.395	10.03	.284	7.21
9S	.500	12.70	.395	10.03	.285	7.24
15P	.650	16.51	.545	13.84	.434	11.02
15S	.650	16.51	.545	13.84	.435	11.05
21P	.800	20.32	.695	17.65	.584	14.83
21S	.800	20.32	.695	17.65	.585	14.86
25P	.900	22.86	.795	20.19	.684	17.37
25S	.900	22.86	.795	20.19	.685	17.40
31P	1.050	26.67	.945	24.00	.834	21.18
31S	1.050	26.67	.945	24.00	.835	21.21
37P	1.200	30.48	1.095	27.81	.984	24.99
37S	1.200	30.48	1.095	27.81	.985	24.02
51P	1.550	39.37	1.445	36.70	1.334	33.88
51S	1.550	39.37	1.445	36.70	1.335	33.91


VERTICAL SMT PLUG (PIN) CONNECTOR LAYOUT 890-010

Component Mounting Side of Printed Circuit Board


9 Contacts

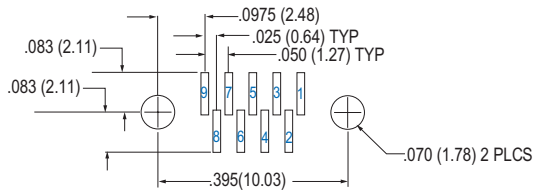


15 Contacts

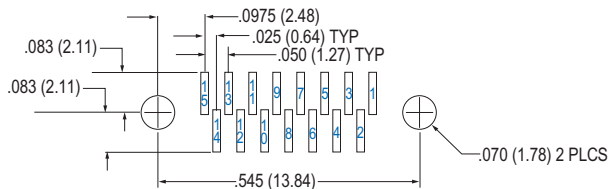


21 Contacts

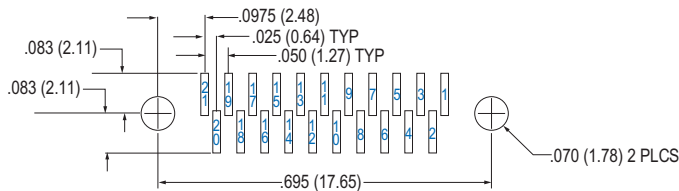


25 Contacts

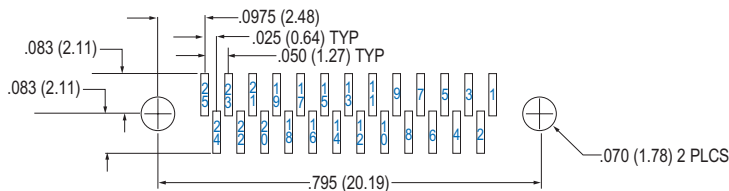




31 Contacts

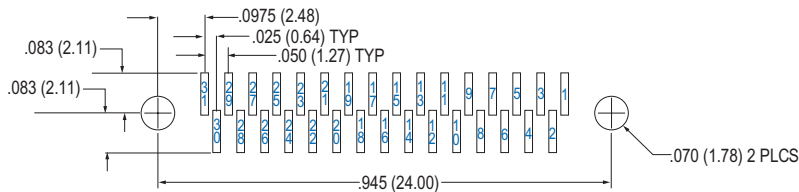

37 Contacts

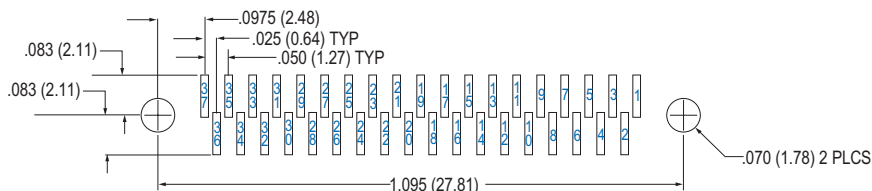

51 Contacts

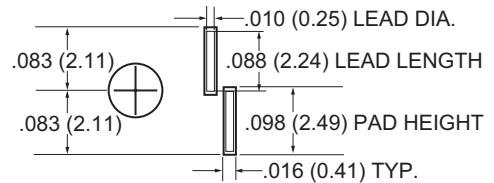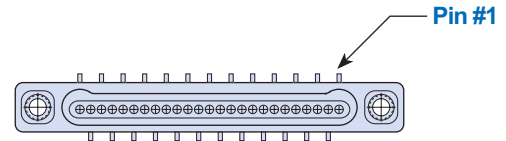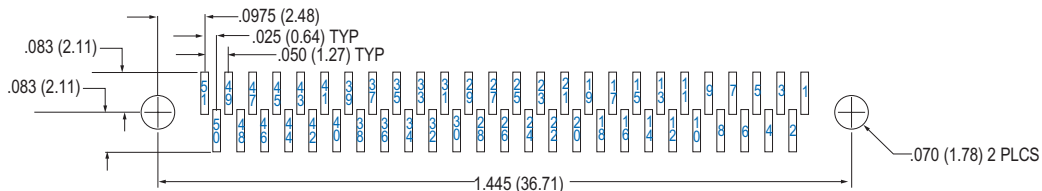

PAD/FOOTPRINT DETAIL


Series 89 Nanominiature Connectors Single Row Vertical Mount SMT 890-010 and -011




VERTICAL SMT RECEPTACLE (SOCKET) CONNECTOR LAYOUT 890-011

Component Mounting Side of Printed Circuit Board


9 Contacts

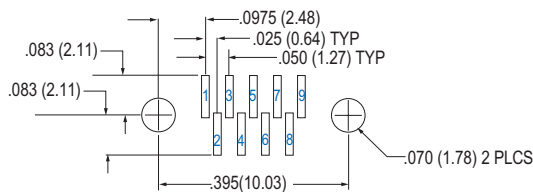


15 Contacts

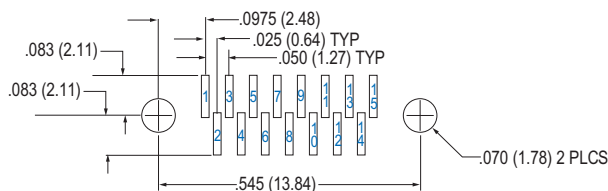


21 Contacts

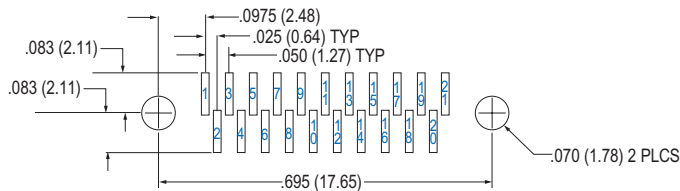


25 Contacts

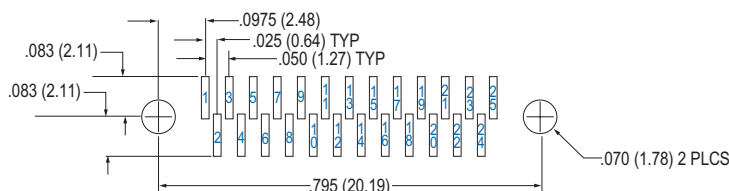




31 Contacts

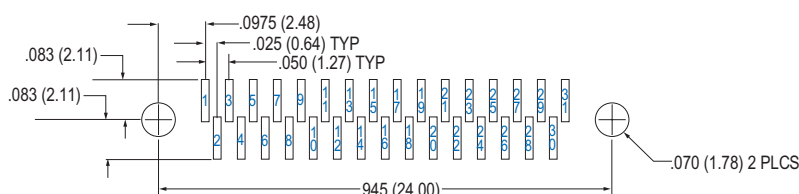

37 Contacts

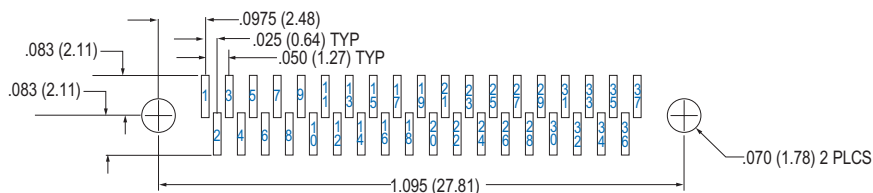

51 Contacts

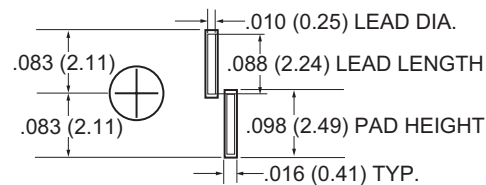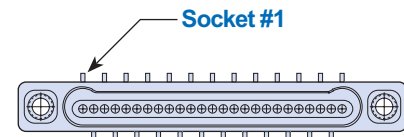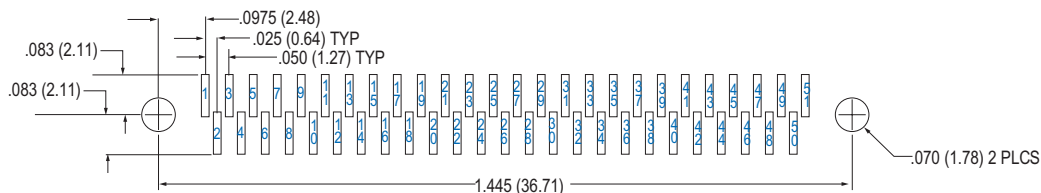

PAD/FOOTPRINT DETAIL