
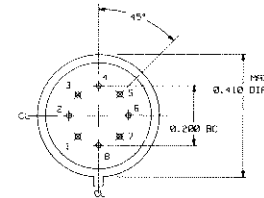
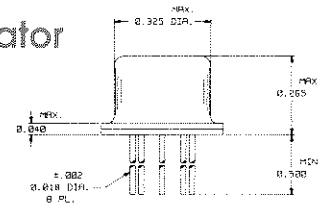


32 kHz to 65 MHz, TTL Oscillator Model 717

PIN NO.	FUNCTION
4	GND
5	OUTPUT
8	VCC
All other Pins, N.C.*	


- 8 pin TO-5 package
- Generic equivalent of MIL-O-55310/09
- Spectrum equivalent #7150
- Optional height 0.20 max

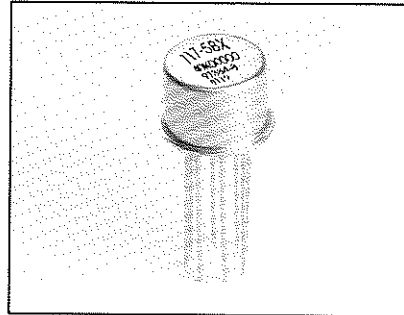

Frequency Range	Input Current at 5.25 V	Rise & Fall Time (.8 and 2.0 V)	Duty Cycle @ 1.4 V	Unit Loads
	mA	ns	percent	max
32.0 kHz to 7.0 MHz	50	15	45 to 55	10TTL
>7.0 to 20.0 MHz	30	15	40 to 60	10TTL
>20.0 to 65.0 MHz	50	5	40 to 60	10TTL

**Other pins may be internally connected and are not to be used as external tie points*
Temperature ranges, stability, and screening options are located with ordering information on page 02.

ORDERING INFORMATION (HOW TO SPECIFY CLOCK OSCILLATORS)

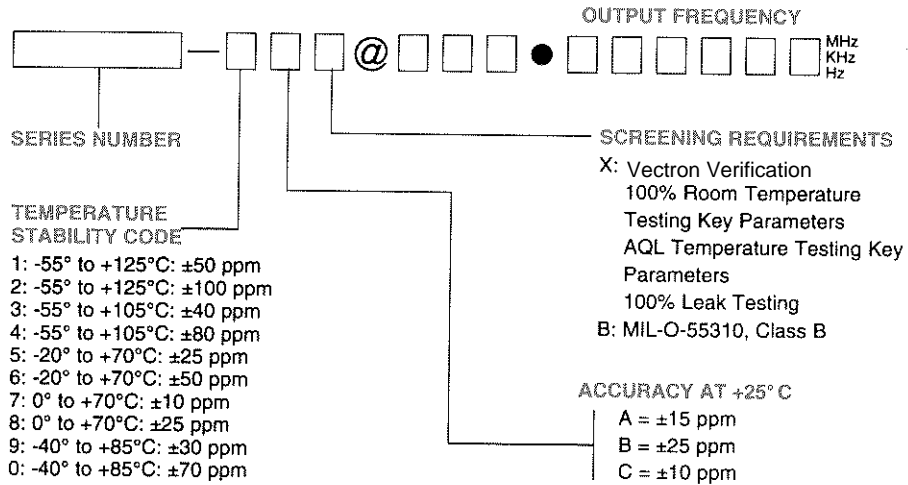

Example:

741-1AB @ 10.000000 MHz

This is a series 741, 14 Pin DIP Oscillator, with an output frequency of 10.000000 MHz, temperature stability of ±50 ppm over -55°C to +125°C, initial accuracy of ±15 ppm, and tested to Class B of MIL-O-55310.

STANDARD ENVIRONMENTALS	
Vibration	MIL-STD-202, Method 204, Condition G (30 G, 10 Hz-2000Hz)
Shock	MIL-STD-202, Method 213, Condition I (100 G, 6 MS, Sawtooth)
Acceleration	MIL-STD-883, Method 2001, Condition A (5000 G's, Y1 Plane)
Temperature Cycling	MIL-STD-883, Method 1010, Condition B
Thermal Shock	MIL-STD-883, Method 107, Condition B
Solderability	MIL-STD-202, Method 208
Leak Test (Fine & Gross)	MIL-STD-883, Method 1014, Condition A1 & C1

Aging

Vectron Clock oscillators have aging of +5 ppm the first year and +3 ppm per year thereafter.

START UP TIME

10 ms max

Vectron can assign a unique part number to meet your requirements. Contact factory for special requirements and other options not found on standard parts.