


Feature




- Improved EMI performance for FCC class B applications.
- Line to line isolation : 500 Vrms.
- Maximum common mode attenuation at 1 MHz.
- Well suited for many telecom applications.

Electrical Specifications@25°C						
Part Number	OCL (uH Min.)	DCR (Ω Max)	Isolation Insulation (Vrms)	Common Mode Attenuation (dB Min)		
				100KHz	1MHz	10MHz
BCM-5855C	4.7mH±30%	1.0	1500	-40	-51	-38

Schematic

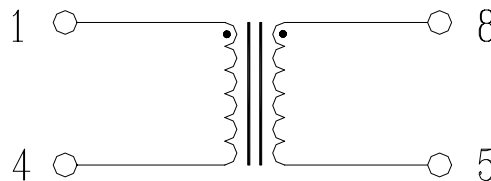

Mechanical

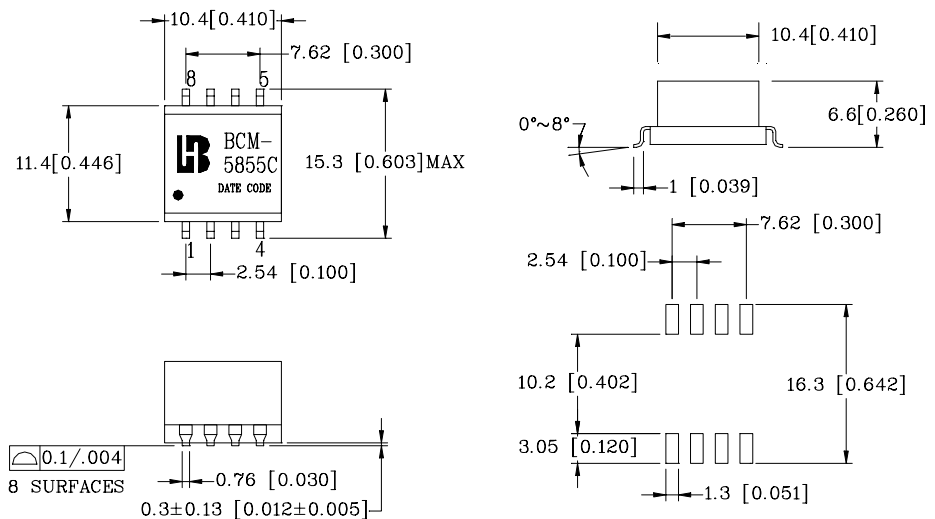

Dimensions: mm[Inches] Tolerances: ±0.25[0.01] PCB Suggest pad layout