

# SFT11 - SFT18

## 1.0 AMP. Super Fast Rectifiers


### TS-1

### Features

- ✧ High efficiency, low VF
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Low power loss.
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode.

### Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Pure tin plated, lead free. solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375"(.95mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 0.20 grams

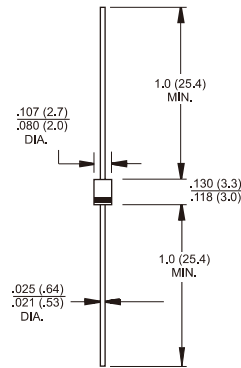

Dimensions in inches and (millimeters)



#### Marking Diagram

- SFT1X = Specific Device Code
- G = Green Compound
- Y = Year
- M = Work Month

### Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%

Type Number	Symbol	SFT 11	SFT 12	SFT 13	SFT 14	SFT 15	SFT 16	SFT 17	SFT 18	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	150	200	300	400	500	600	V
Maximum RMS Voltage	VRMS	35	70	105	140	210	280	350	420	V
Maximum DC Blocking Voltage	VDC	50	100	150	200	300	400	500	600	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ T <sub>A</sub> = 55 °C	I <sub>F(AV)</sub>	1.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	I <sub>FSM</sub>	30								A
Maximum Instantaneous Forward Voltage @ 1.0A	V <sub>F</sub>	0.95		1.3		1.7				V
Maximum DC Reverse Current at Rated DC Blocking Voltage @ T <sub>A</sub> =25 °C (Note 1) @ T <sub>A</sub> =100 °C	I <sub>R</sub>					5.0				uA
						100				uA
Maximum Reverse Recovery Time (Note 3)	T <sub>rr</sub>					35				nS
Typical Junction Capacitance (Note 2)	C <sub>j</sub>	30			15					pF
Typical Thermal Resistance (Note 4)	R <sub>θJA</sub>	100								°C/W
Operating Temperature Range	T <sub>J</sub>	-65 to +125								°C
Storage Temperature Range	T <sub>STG</sub>	-65 to +150								°C

- Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle  
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.  
 3. Reverse Recovery Test Conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>RR</sub>=0.25A  
 4. Mount on Cu-Pad Size 5mm x 5mm on PCB.

## RATINGS AND CHARACTERISTIC CURVES (SFT11 THRU SFT18)

FIG.1- MAXIMUM AVERAGE FORWARD CURRENT DERATING

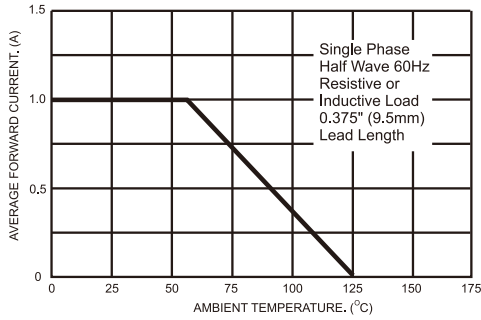


FIG.2- TYPICAL REVERSE CHARACTERISTICS

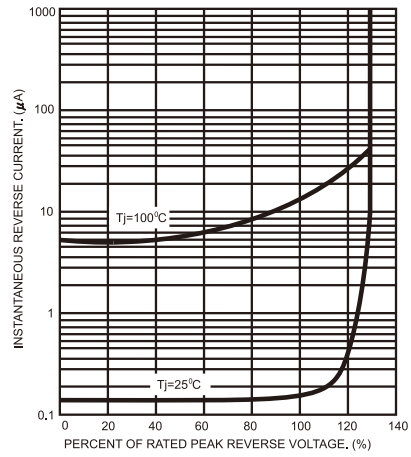


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

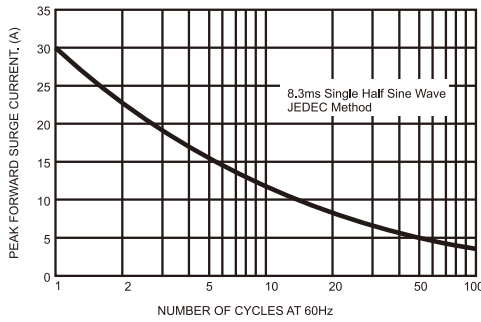


FIG.5- TYPICAL FORWARD CHARACTERISTICS

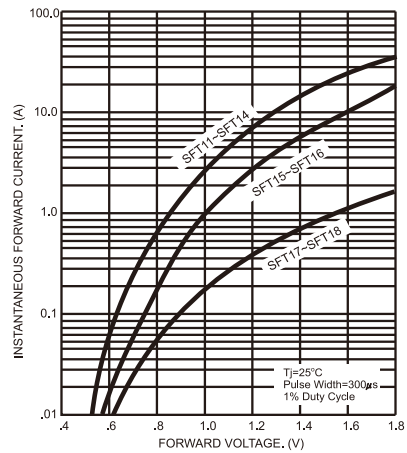


FIG.4- TYPICAL JUNCTION CAPACITANCE

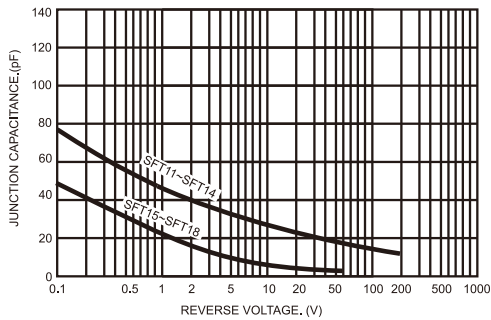


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

