

## Split Bobbin Isolation Transformer


### Series: P24H - Printed Circuit Mount, Horizontal 6 Pins

- Power Rating 1.1VA to 36VA
- Single Primary, 24V
- Frequency 50/60HZ
- Series or Parallel Secondary
- Dielectric Strength – 2500 Vrms
- Insulation Class B (130°C)
- Low Capacitive Coupling, no Electrostatic Shield Needed



### Agency Approvals:

- UL/cUL 5085-2 Recognized (File E47299)
- Insulation File No. E95662

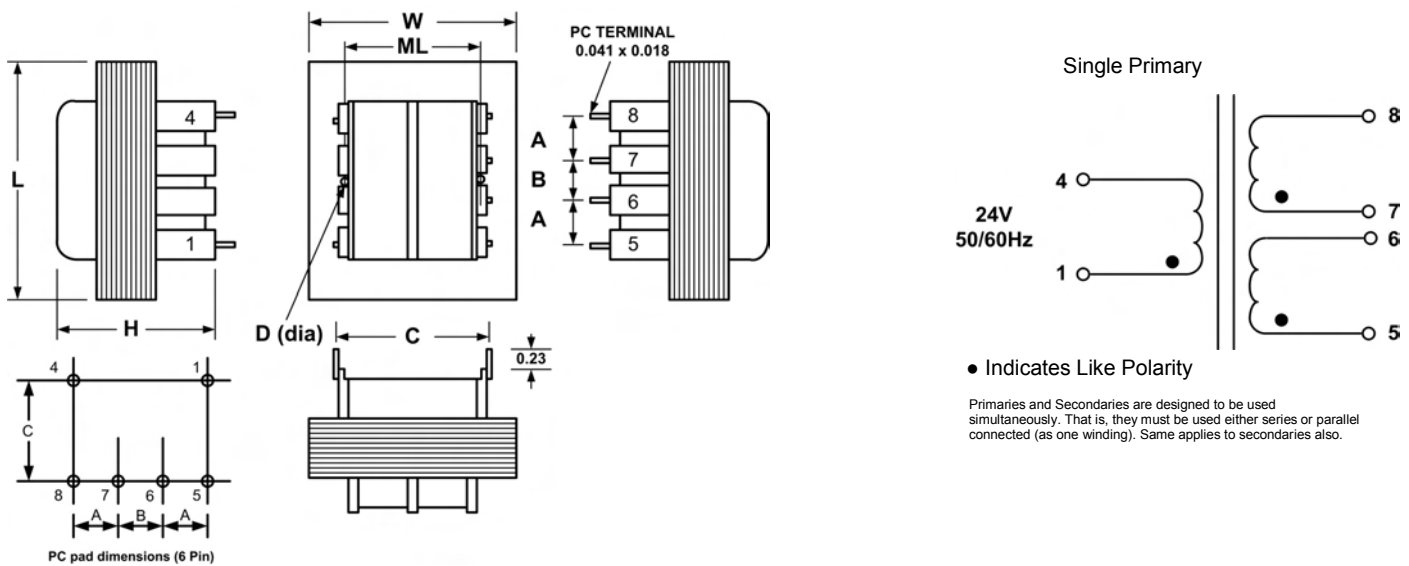

VA Rating	Part Number	Secondary		Dimensions (Inches)								Wgt. Lbs
		Series	Parallel	L	W	H	ML	A	B	C	D (dia)	
1.1	P24H-11-24	24VCT @ 46mA	12V @ 0.092A	1.38	1.13	0.93	-	0.250	0.250	1.22	-	0.17
2.4	P24H-24-24	24VCT @ 100mA	12V @ 0.200A	1.38	1.13	1.17	-	0.250	0.250	1.22	-	0.25
6	P24H-06-24	24VCT @ 250mA	12V @ 0.500A	1.63	1.31	1.29	1.06	0.250	0.350	1.28	0.125	0.44
12	P24H-12-24	24VCT @ 500mA	12V @ 1.000A	1.88	1.56	1.41	1.25	0.300	0.400	1.40	0.150	0.70
20	P24H-20-24	24VCT @ 833mA	12V @ 1.670A	2.25	1.88	1.41	1.66	0.300	0.400	1.59	0.218*	0.80
36	P24H-36-24	24VCT @ 1.500A	12V @ 3.000A	2.63	2.19	1.56	1.94	0.400	0.400	1.84	0.218*	1.10

\* = Slots

Any application, Any requirement, Contact us for our Custom Designs