


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SDRP-206.
2. MATERIAL SPECIFICATIONS:
BAYONET SLEEVE, BODY, CONTACT, FERRULE: BRASS PER ASTM B16
INSULATOR: TEFLON PER ASTM D1710
SPRING WASHER, OUTER CONTACT: BERYLLIUM COPPER, ASTM-B-194
GASKET: SILICONE RUBBER
3. FINISH SPECIFICATIONS:
BAYONET SLEEVE, BODY, FERRULE: .000100MIN NICKEL PER AMS-QQ-N-290
OVER COPPER FLASH PER ASTM B734 (ROHS)
CONTACT: .000030 MIN. GOLD PER ASTM B488, OVER NICKEL PER AMS-QQ-N-290 (ROHS)
SPRING WASHER: .000200 MIN SILVER PER QQ-S-365 OVER COPPER PER ASTM B734 (ROHS)
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N290 OVER
.000050 MIN COPPER PER ASTM B734 (ROHS)
4. CONTACT AND FERRULE SHIPPED LOOSE.
5. FOR USE WITH TACHII CABLE TCX-3CFB & CANARE CABLE L-3CFB OR EQUIVALENT.
6. FOR CRIMPING USE KINGS KTH-5000 & KTH-5005 (.232 HEX, .054 SQUARE FLAT).
7. ASSEMBLE TO CABLE USING CAP-E01.
8. THESE AREA DON'T HAVE WHITE MARKING.
9. ELECTRIC SPECIFICATIONS:
IMPEDANCE: 75 OHMS
FREQUENCY RANGE: DC TO 3 GHz
RETURN LOSS: 25 dB MIN (DC TO 3 GHz)

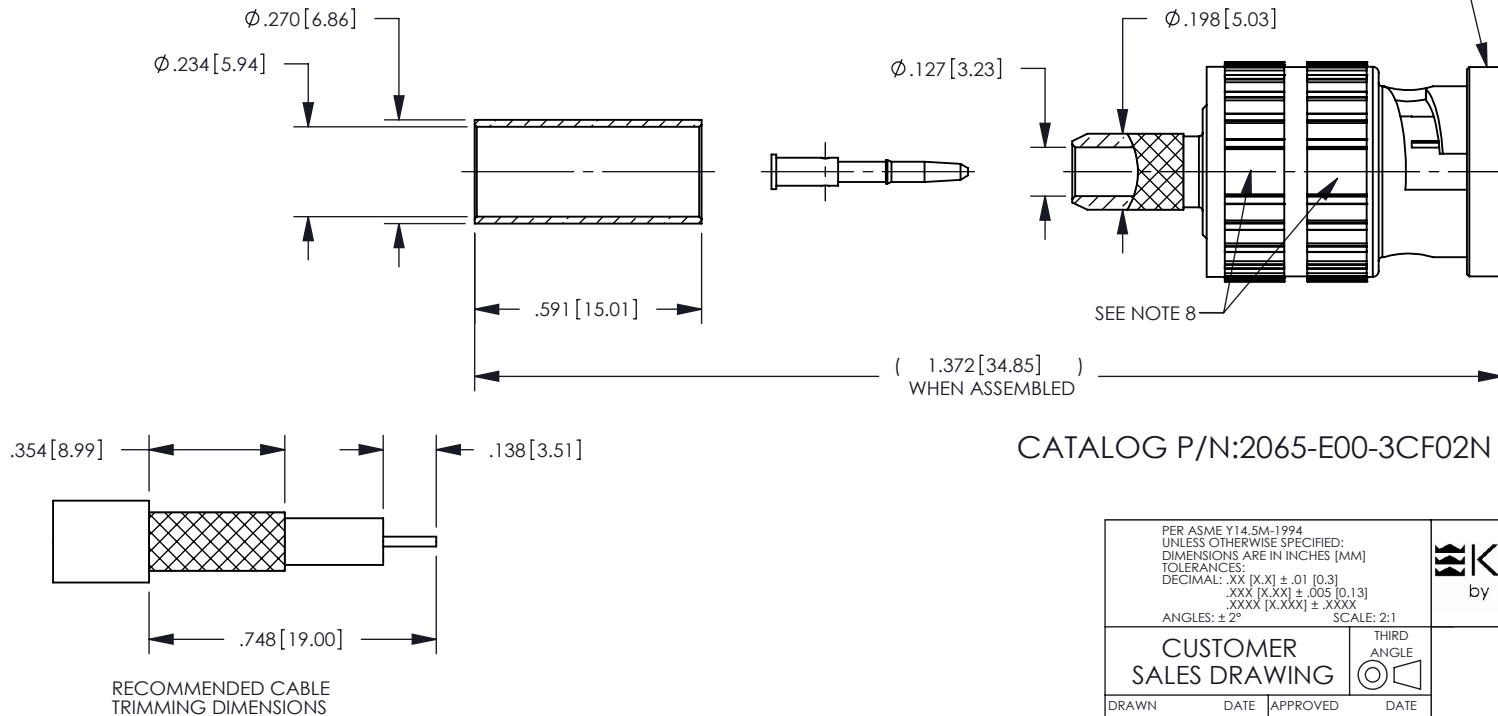

REV	DESCRIPTION	BY DATE	APPD
B	REVISED PER ECR-ER22654	03/15/10 CY	CTC

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2:1				 KINGS[®] by WINCHESTER ELECTRONICS Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER SALES DRAWING			THIRD ANGLE 	BNC 75 PLUG FOR TACHII TCX-3CFB (ROHS COMPLIANT)			
DRAWN CY	DATE 04/07/09	APPROVED CTC	DATE 04/07/09				
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX	A	SD2065-E00-3CF02N	SHT OF REV 1 1 B	