



## ZTACS Series

- Surface Mount
- Fast Delivery
- Tape & Reel or Bulk Packaging
- Highly Competitive Prices for Volume Users
- 8.00000MHz to 50.00MHz

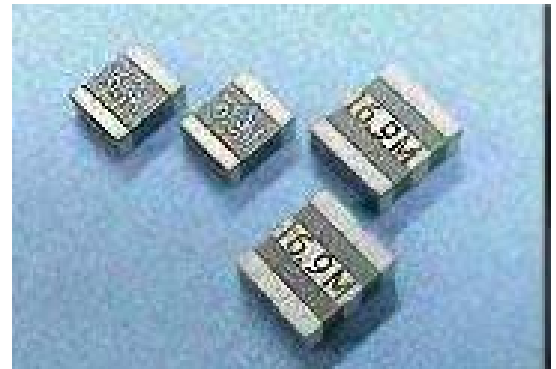

Series	Frequency Range	Frequency Tolerance	ESR	Temperature Tolerance	Aging
ZTACS--.--MT	8.00 – 13.00MHz	+/- 0.3%	25Ω	+/- 0.3%	+/- 0.5%
ZTACS--.--MX	13.01 – 50.00MHz	+/- 0.3%	40Ω	+/- 0.3%	+/- 0.5%
ZTACV--.--MT	8.00 – 12.00MHz	+/- 0.3%	40Ω	+/- 0.3%	+/- 0.5%
ZTACV--.--MX	16.01 – 50.00MHz	+/- 0.3%	40Ω	+/- 0.3%	+/- 0.5%

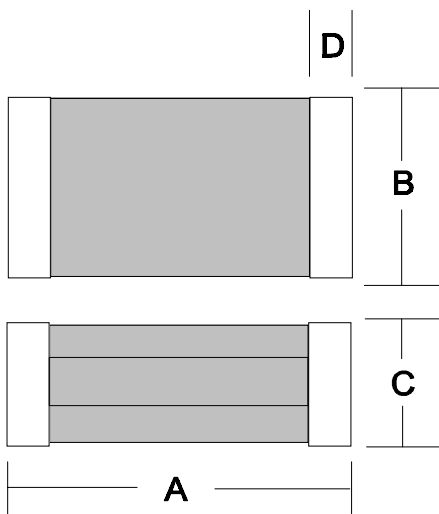

Series	A	B	C	D
ZTACS	4.70	4.10	1.60	1.00
ZTACV	3.70	3.01	1.20	0.90

Dimensions in mm