


Surface Mount Noise Sources

NFP1003

100 MHz to 3 GHz

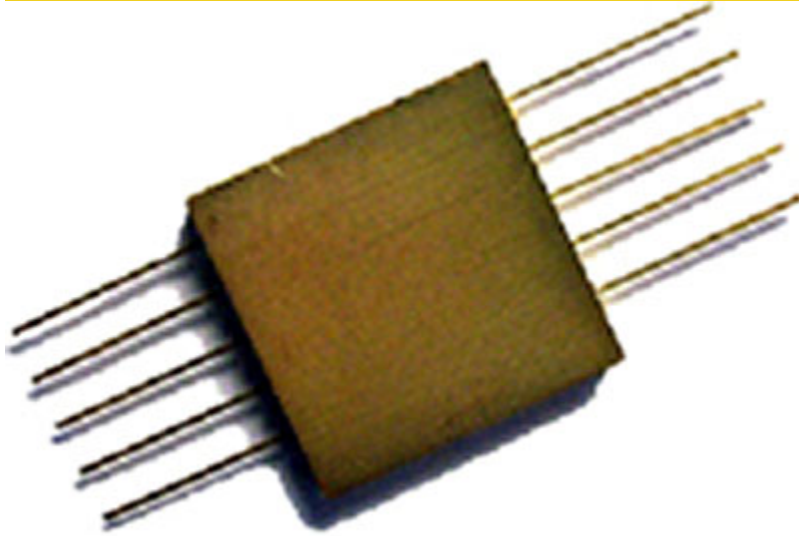

Specifications

RF Frequency	100 MHz to 3 GHz
Noise Output	43 - 48 dB (100 MHz - 1 GHz) ENR 41 - 46 dB (1 GHz - 2 GHz) ENR y ENR
Noise Spectral Density (N_o)	-134 dBm/Hz Min
VSWR	2.0:1 Max
Bias Voltage	12 to 28 V
Supply Current	50 mA Max
Impedance	50 ohms


Package and Connectivity

Construction	Hermetic SMT
--------------	--------------

Environmental

Operating Temperature	-40 to 85 °C
Storage Temperature	-54 to 125 °C

Notes

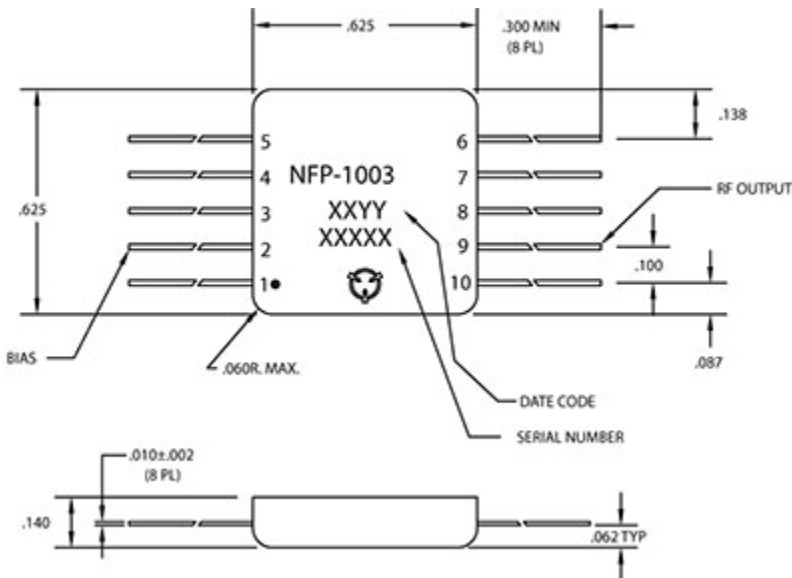

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com



