




REVERSE VOLTAGE: 50 --- 1000 V
CURRENT: 1.0 A

Features

- ◇ Plastic package has underwriters laborator flammability classification 94V-0
- ◇ For surface mounted applications
- ◇ Low profile package
- ◇ Built-in strain relief,ideal for automated placement
- ◇ High temperature soldering:
250 °C/10 seconds at terminals

SMAJ

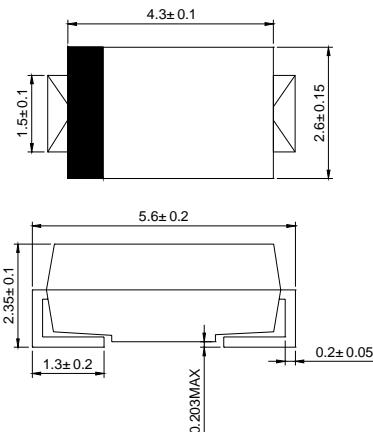

Dimensions in millimeters

Mechanical Data

- ◇ Case:JEDEC SMAJ,molded plastic
- ◇ Polarity: color band denotes cathode end
- ◇ Weight: 0.003 ounces, 0.084 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

| | | RS1AJ | RS1BJ | RS1DJ | RS1GJ | RS1JJ | RS1KJ | RS1MJ | UNITS |
|--|------------------------------------|------------------|-------|--------------------|-------|-------------|-------|------------------|-------|
| Device marking | | RS1A | RS1B | RS1D | RS1G | RS1J | RS1K | RS1M | |
| Maximum recurrent peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RWS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward rectified current @ $T_L=90^\circ\text{C}$ | $I_{F(AV)}$ | 1.0 | | | | | | A | |
| Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load | I_{FSM} | 30.0 | | | | | | A | |
| Maximum instantaneous forward voltage at 1.0A | V_F | 1.30 | | | | | | V | |
| Maximum DC reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=125^\circ\text{C}$ | I_R | 5.0 50.0 | | | | | | μA | |
| Maximum reverse recovery time (NOTE 1) | t_{rr} | 150 | | 250 | 500 | ns | | | |
| Typical junction capacitance (NOTE 2) | C_J | 10 | | 7.0 | 7.0 | pF | | | |
| Typical thermal resistance (NOTE 3) | $R_{\theta JA}$ $R_{\theta JL}$ | 105 32 | | $^\circ\text{C/W}$ | | | | | |
| Operating junction and storage temperature range | T_J T_{STG} | - 55 ----- + 150 | | | | | | $^\circ\text{C}$ | |

NOTE: 1.Reverse recovery time test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_r=0.25\text{A}$

2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts

3. Thermal resistance from junction to ambient and junction to lead P.C.B.mounted on 0.2"X0.2"(5.0X5.0mm²) copper pad areas

Ratings AND Characteristic Curves

Fig. 1 — Forward Current Derating Curve

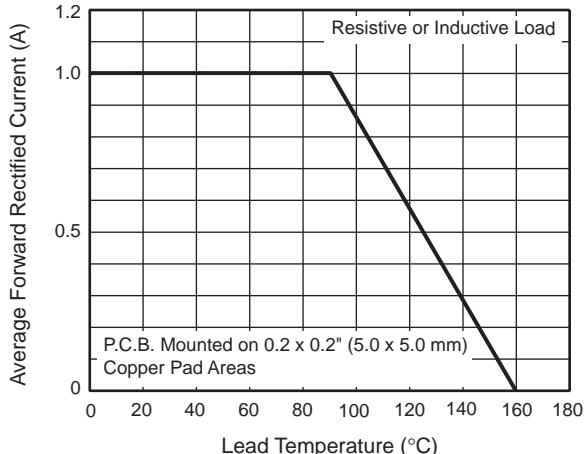


Fig. 2 — Maximum Non-Repetitive Peak Forward Surge Current

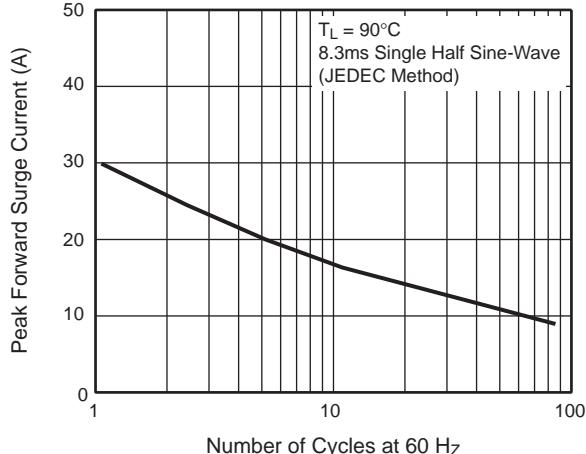


Fig. 3 — Typical Instantaneous Forward Characteristics

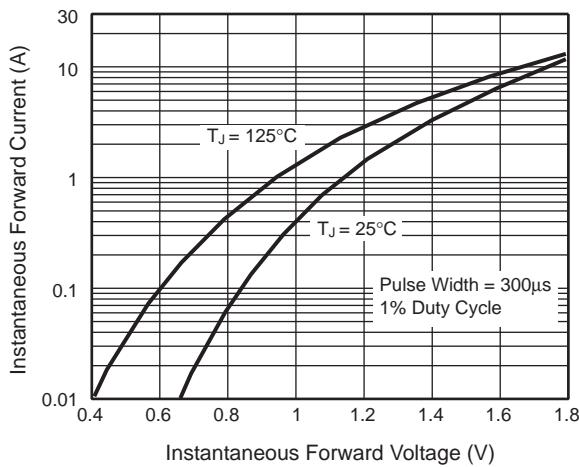


Fig. 4 — Typical Reverse Characteristics

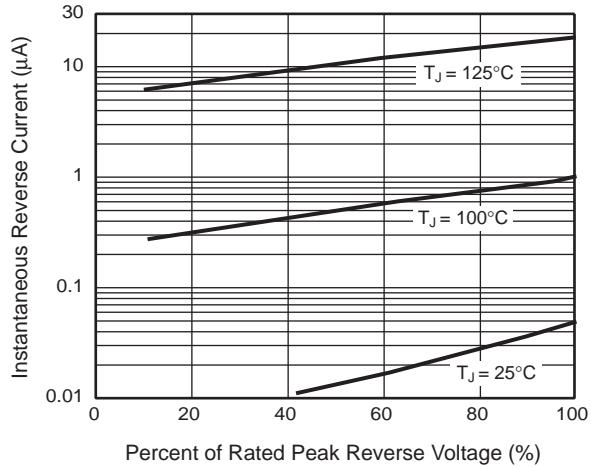


Fig. 5 — Typical Junction Capacitance

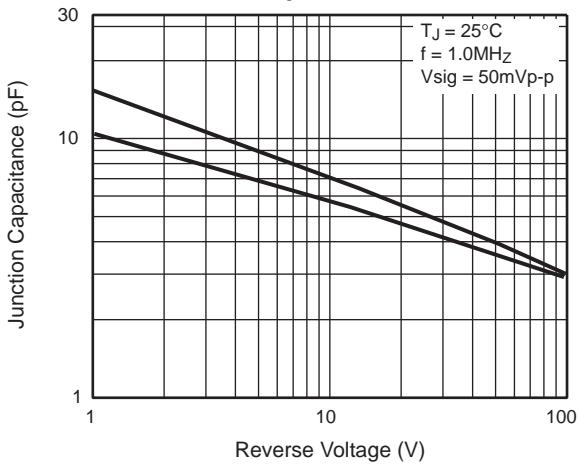


Fig. 6 — Typical Transient Thermal Impedance

