



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

1.5A SILICON SINGLE-PHASE BRIDGE RECTIFIERS


W-005M-LFR THRU W-10M-LFR

FEATURES

- PLASTIC MATERIAL USED CARRIES UNDERWRITERS LABORATORY FLAMMABILITY RECOGNITION 94V-0
- HIGH CASE DIELECTRIC STRENGTH
- TYPICAL IR LESS THAN 1 μ A
- HIGH OVERLOAD SURGE CAPABILITY
- IDEAL FOR PRINTED CIRCUIT BOARD
- ROHS

MECHANICAL DATA

- CASE: EPOXY CASE, DIMENSIONS IN INCHES AND (MILLIMETERS)
- TERMINALS: LEADS SOLDERABLE PER MIL-STD-202 METHOD 208
- MOUNTING POSITION: ANY
- WEIGHT: 1.1 GRAMS

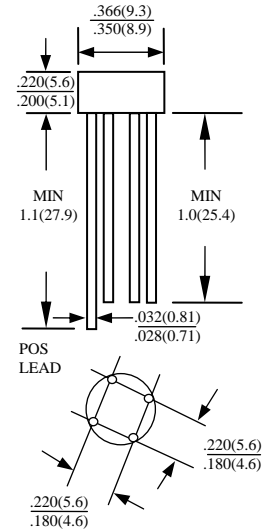

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	W-005M -LFR	W-01M -LFR	W-02M -LFR	W-04M -LFR	W-06M -LFR	W-08M -LFR	W-10M -LFR	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375" (9.5mm) LEAD LENGTH AT TA=25°C	I_O	1.5							A
PEAK FORWARD SURGE CURRENT SINGLE SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	50							A
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 150							°C
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 125							°C

ELECTRICAL CHARACTERISTICS (AT TA =25°C UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	W-005M -LFR	W-01M -LFR	W-02M -LFR	W-04M -LFR	W-06M -LFR	W-08M -LFR	W-10M -LFR	UNITS
MAXIMUM INSTANTANEOUS FORWARD VOLTAGE DROP PER ELEMENT AT 1.0A	V_F	1.1							V
MAXIMUM REVERSE LEAKAGE AT RATED DC TA=25°C	I_r	10							μ A

RATINGS AND CHARACTERISTIC CURVES W-005M-LFR THRU W-10M-LFR

FIG. 1 - DERATING CURVE OUTPUT RECTIFIED CURRENT

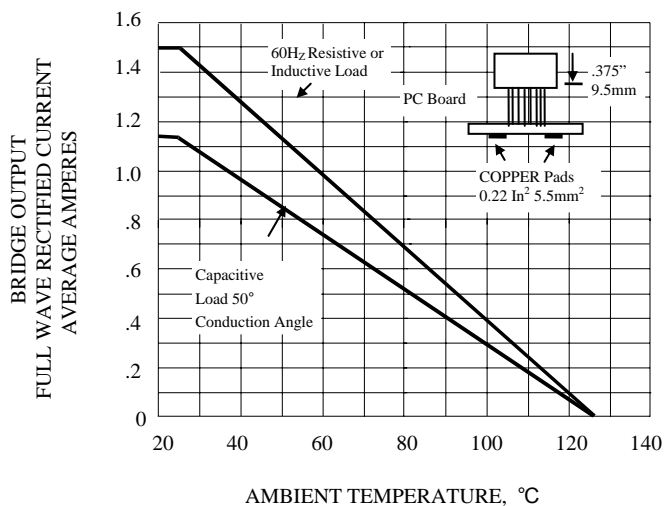


FIG. 2 - TYPICAL REVERSE CHARACTERISTICS

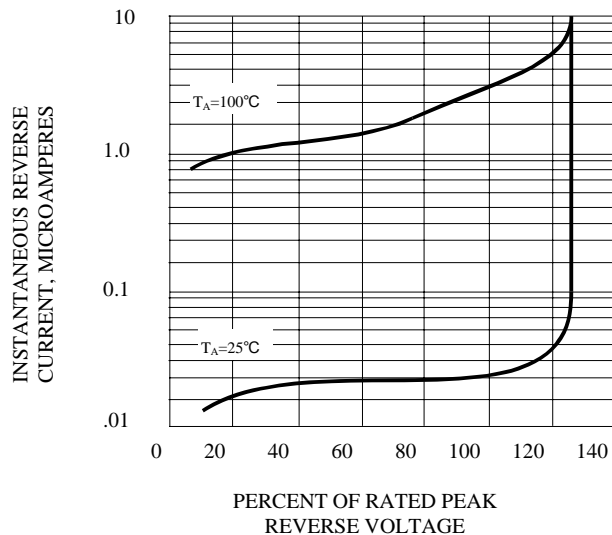


FIG. 3 - TYPICAL FORWARD CHARACTERISTICS PER ELEMENT

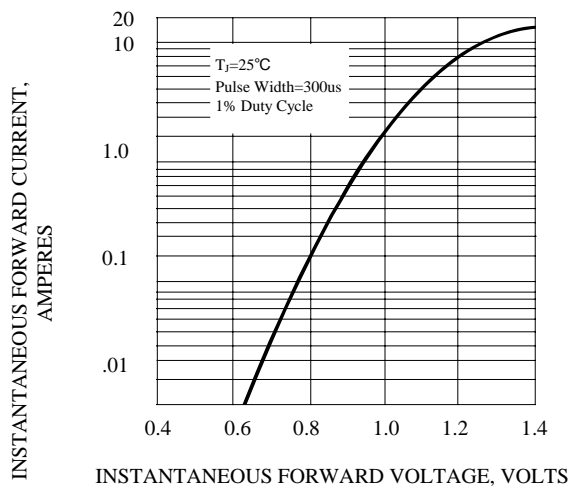


FIG. 4 - TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

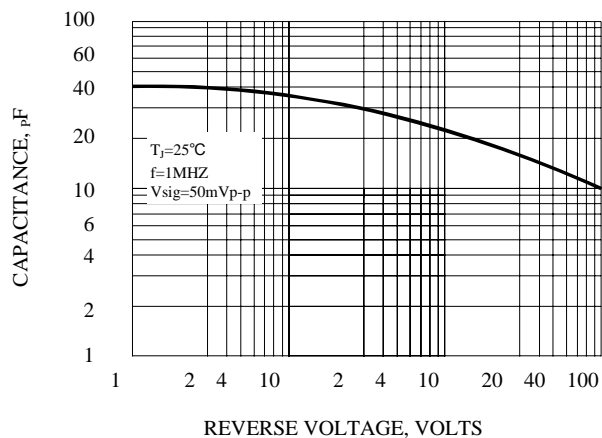


FIG. 5 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

