




DG332K

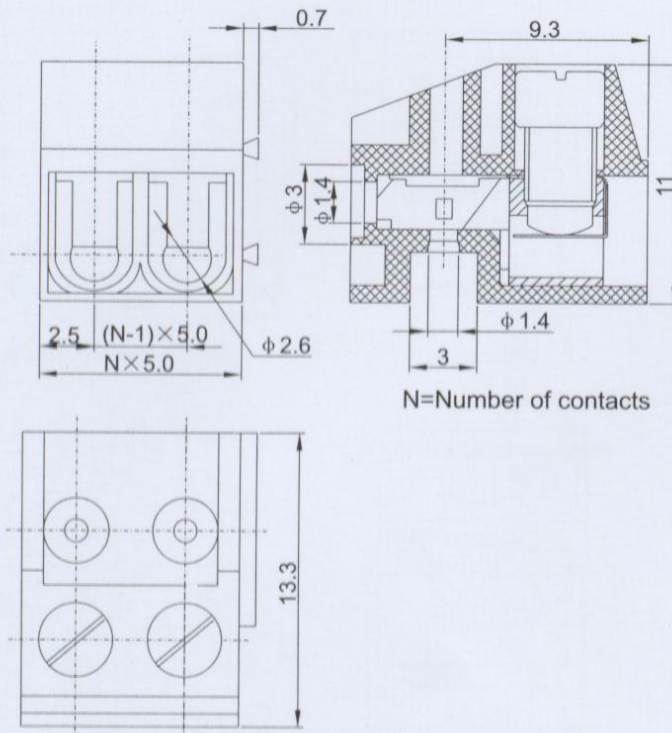

Pitch:5mm,10mm

● Material

Screws : M2.5 steel Zinc plated
 Wire guard : Phosphor bronze Ni plated
 Housing : PBT, UL94V-0

● Electrical

Rated voltage : 250V
 Rated current : 10A
 Contact resistance : 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding voltage: AC1500V/1Min
 Wire range : 28-16AWG 1.5mm²

● Mechanical

Temp Range : -30°C~+120°C
 MAX Soldering: +250°C ,for 5 Sec.
 Torque : 0.4Nm(3.6lb.in)
 Strip length : 4.5mm