



### 1. Dimensions:

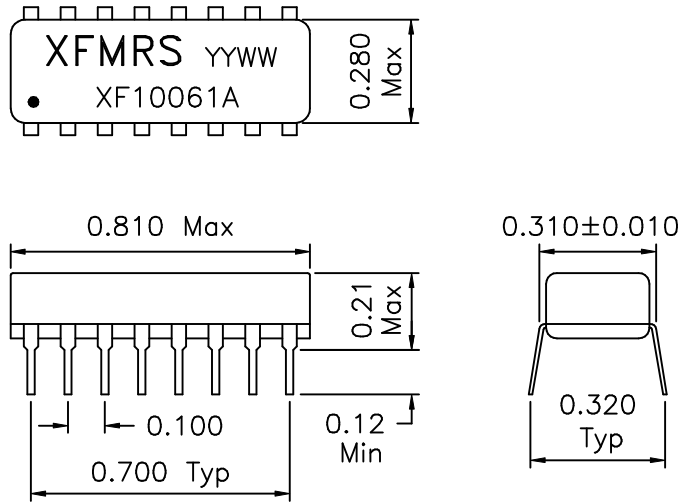

### 2. Schematic:

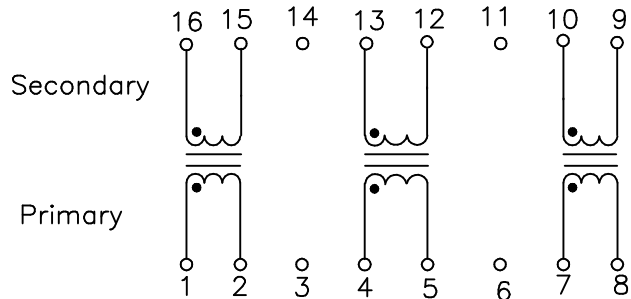

### 3. Electrical Specifications: @25°C

- Isolation: 1500 Vrms for (PRI to SEC)
- Turns Ratio: 1:1 ±2% (PRI:SEC)
- PRI OCL: 100uH ±20% @100KHz 50mV
- Cw/w: 10.0pF Maximum @100KHz 50mV (PRI/SEC)
- PRI Leakage Inductance: 0.20uH Maximum @100KHz 50mV SEC SHORTED
- PRI DC Resistance: 0.20 Ohms Maximum

DOC. REV. A/2

<b>XFMRS INC.</b>		Title: 10 BASE-T ISOLATION MODULE	
UNLESS OTHERWISE SPECIFIED		P/N: XF10061A	REV. A
TOLERANCES: .xxx ±0.010		DWN. 廖玉坤	May-02-00
Dimensions in Inch		CHK. 李清儿	May-02-00
SCALE 2:1 SHT 1 OF 1		APP. Joe Huff	May-02-00