

## UT131



TRIAC

## TRIACS LOGIC LEVEL

## ■ DESCRIPTION

Passivated, sensitive gate triacs in a plastic envelope, intended for use in general purpose bidirectional switching and phase control applications. These devices are intended to be interfaced directly to microcontrollers. Logic integrated circuits and other low power gate trigger circuits.

## ■ SYMBOL

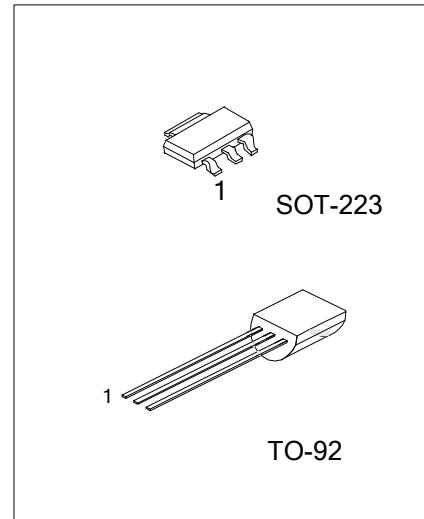

## ■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UT131L-x-T92-B	UT131L-x-T92-B	TO-92	MT1	GATE	MT2	Tape Box
UT131L-x-T92-K	UT131L-x-T92-K	TO-92	MT1	GATE	MT2	Bulk
UT131L-x-T92-R	UT131L-x-T92-R	TO-92	MT1	GATE	MT2	Tape Reel
UT131L-x-AA3-R	UT131G-x-AA3-R	SOT-223	MT1	MT2	GATE	Tape Reel

UT131L-x-T92-B 	(1) R:Tape Reel, B: Tape Box, K: Bulk (2) AA3: SOT-223, T92: TO-92 (3) 5: 500V, 6: 600V, 8: 800V (4) G:Halogen Free, L: Lead Free
--------------------	--

### ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Repetitive Peak Off-State Voltage (Note 2)	$V_{DRM}$	500	V
		600	V
		800	V
RMS On-State Current, Full Sine Wave; $T_{leads} \leq 51^\circ C$	$I_{T(RMS)}$	1	A
Non-Repetitive Peak On-State Current (Full Sine Wave; $T_J = 25^\circ C$ Prior to Surge)	$I_{TSM}$	16	A
		17.6	A
Circuit Fusing	$I_t^2$	1.28	$A^2s$
Repetitive Rate of Rise of On-State Current after Triggering $I_{TM}=1.5A$ , $I_G=0.2A$ , $dI_G/dt=0.2A/\mu s$	$dI_T/dt$	50	$A/\mu s$
		50	$A/\mu s$
		50	$A/\mu s$
		10	$A/\mu s$
Peak Gate Voltage	$V_{GM}$	5	V
Peak Gate Current	$I_{GM}$	2	A
Peak Gate Power	$P_{GM}$	5	W
Average Gate Power (over any 20ms period)	$P_{G(AV)}$	0.5	W
Junction Temperature	$T_J$	+125	$^\circ C$
Storage Temperature	$T_{STG}$	-40 ~ +150	$^\circ C$

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Although not recommended, off-state voltages up to 800V may be applied without damage, but the triac may switch to the on-state. The rate of rise of current should not exceed 3 A/ $\mu s$ .

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Lead	$\theta_{JLEAD}$	60	K/W
		80	K/W
Junction to Ambient (Note)	$\theta_{JA}$	150	K/W

Note: PCB mounted; lead length=4mm

### ■ ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ C$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Gate Trigger Current	$I_{GT}$	$V_D=12V$ , $I_T=0.1A$	$T_2 + G +$	0.4	3	mA
			$T_2 + G -$	1.3	3	mA
			$T_2 - G -$	1.4	5	mA
			$T_2 - G +$	3.8	7	mA
Latching Current	$I_L$	$V_D=12V$ , $I_{GT}=0.1A$	$T_2 + G +$	1.2	5	mA
			$T_2 + G -$	4.0	8	mA
			$T_2 - G -$	1.0	5	mA
			$T_2 - G +$	2.5	8	mA
Holding Current	$I_H$	$V_D=12V$ , $I_{GT}=0.1A$		1.3	5	mA
On -State Voltage	$V_T$	$I_T=2.0A$		1.2	1.5	V
Gate Trigger Voltage	$V_{GT}$	$V_D=12V$ , $I_T=0.1A$		0.7	1.5	V
		$V_D=400V$ , $I_T=0.1A$ , $T_J=125^\circ C$	0.2	0.3		V
Off-State Leakage Current	$I_D$	$V_D=V_{DRM(MAX)}$ , $T_J=125^\circ C$		0.1	0.5	mA

### ■ DYNAMIC CHARACTERISTICS ( $T_J = 25^\circ C$ , unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Critical Rate of Rise of off-state Voltage	$dV_D/dt$	$V_{DM}=67\% V_{DRM(MAX)}$ , $T_J=125^\circ C$ Exponential waveform, $R_{GK}=1k\Omega$	5	15		$V/\mu s$
Gate Controlled Turn-on Time	$t_{GT}$	$I_{TM}=1.5A$ , $V_D=V_{DRM(MAX)}$ , $I_G=0.1A$ $dI_G/dt=5A/\mu s$		2		$\mu s$

## ■ TYPICAL CHARACTERISTICS


Maximum on-state Dissipation vs. RMS On-state Current,  $I_{T(RMS)}$ , Where  $\alpha$  = conduction Angle

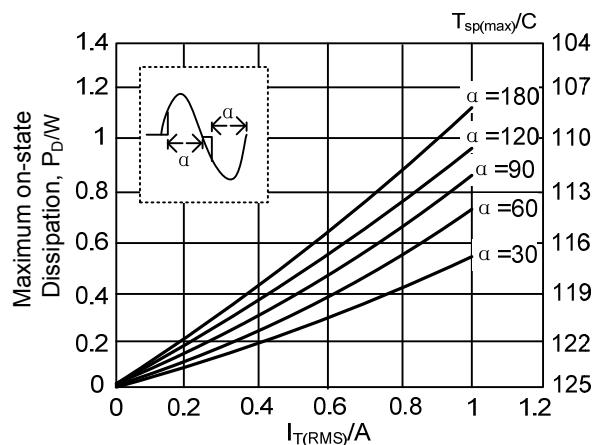


Maximum Permissible Non-repetitive Peak On-state Current vs. Pulse Width  $t_p$ , for Sinusoidal Currents,  $t_p \leq 20\text{ms}$

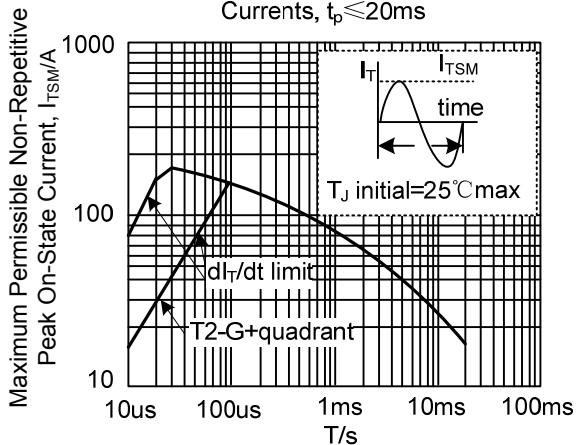


Maximum Permissible Non-Repetitive Peak On-State Current vs. Number of Cycles, for Sinusoidal Currents

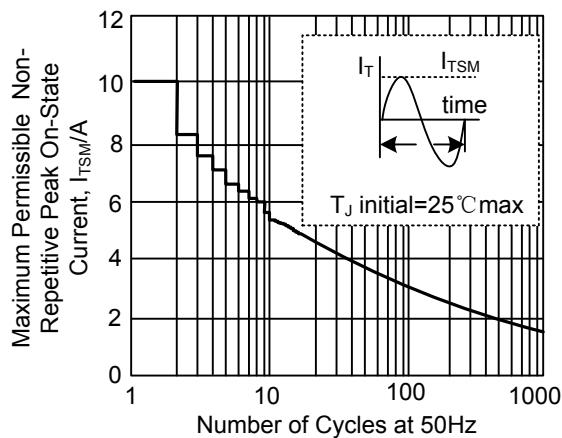


Maximum Permissible RMS Current  $I_{T(RMS)}$  vs. Lead Temperature

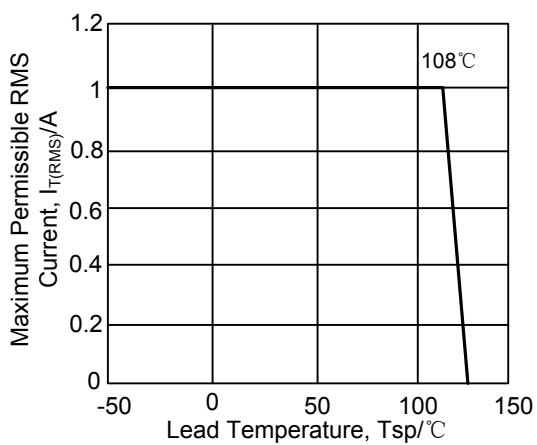







Maximum Permissible Repetitive RMS on-state Current vs. Surge Duration, for Sinusoidal Currents,  $f=50\text{Hz}$ ;  $T_{lead} \leq 51^\circ\text{C}$

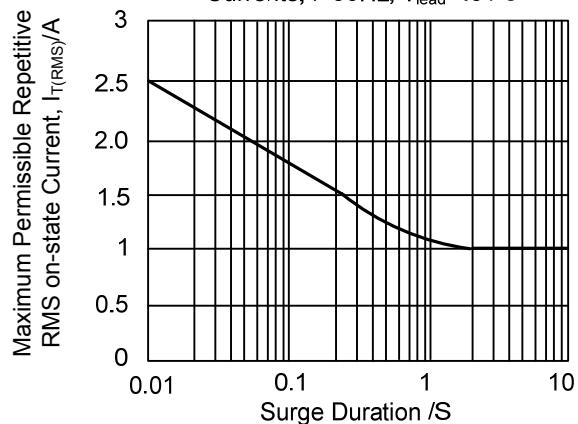

Normalised Gate Trigger Voltage vs. Junction Temperature

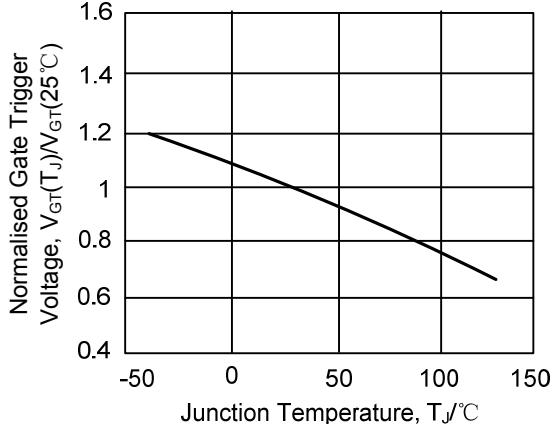

■ TYPICAL CHARACTERISTICS(Cont.)

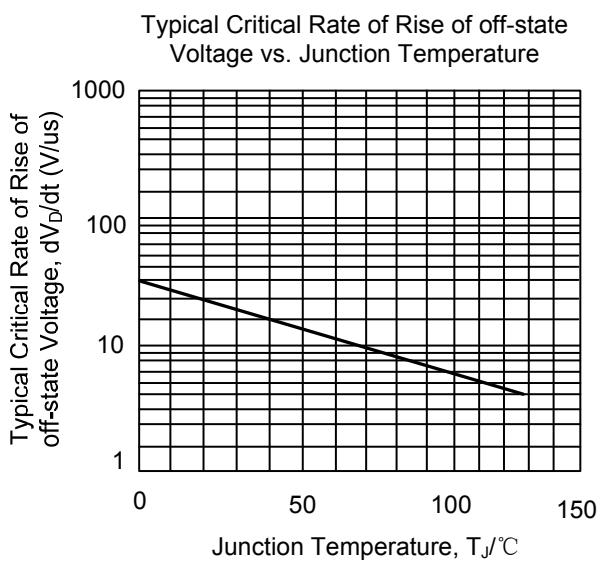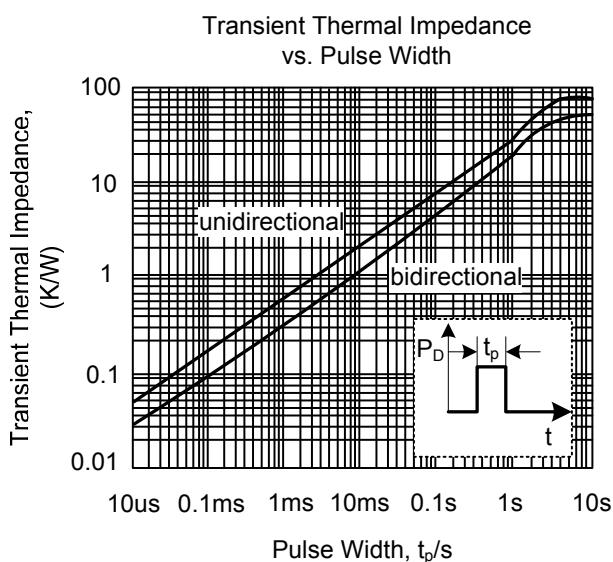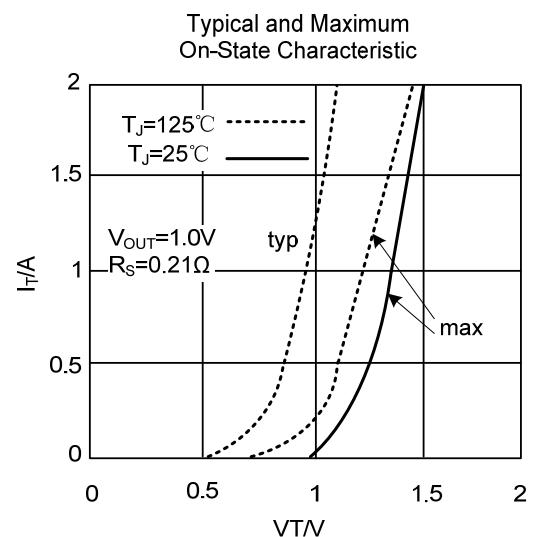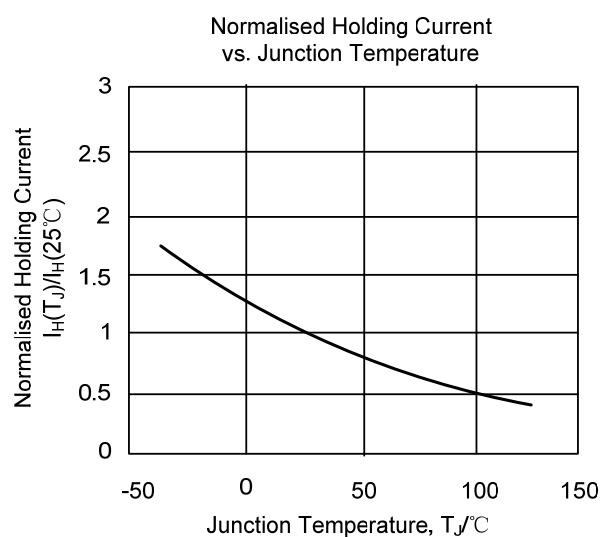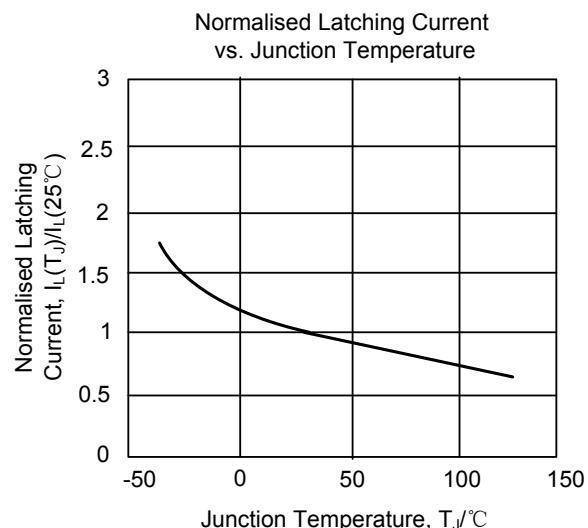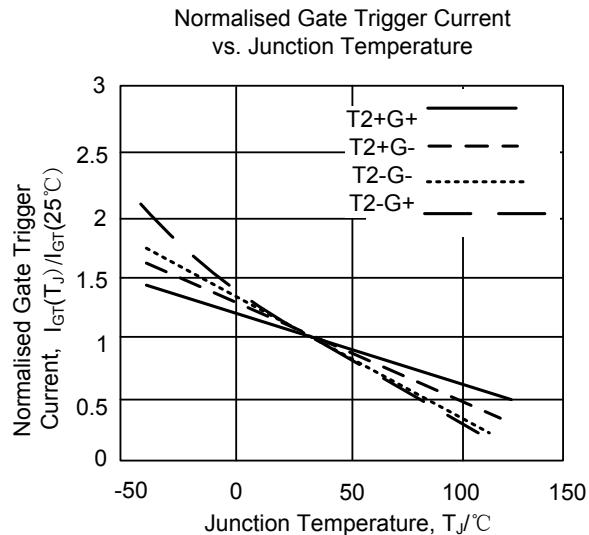

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

