

## FOR 5 x 20 mm FUSES

### 5 x 20 mm Low Amperage P.C. Board Type





**APPROVALS:** Recognized under the Components Program of Underwriters Laboratories and Certified by CSA.

**SPECIFICATIONS:**

- Electrical:** Rated for 3.15 amperes at 250 volts.
- Dielectric Strength:** 3000 volts minimum.
- Terminals:** Tin plated copper alloy.
- Base:** Gray thermoplastic with UL 94V0 flammability rating.
- Ambient Temperature:** 60°C maximum.

**ORDERING INFORMATION:**

Catalog Number	Number of Poles
354 252	1

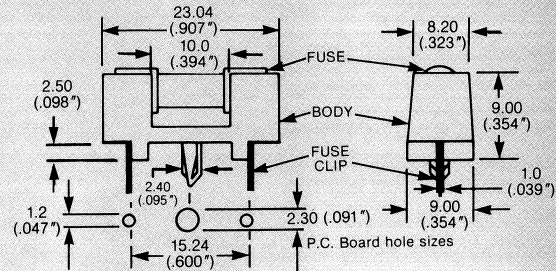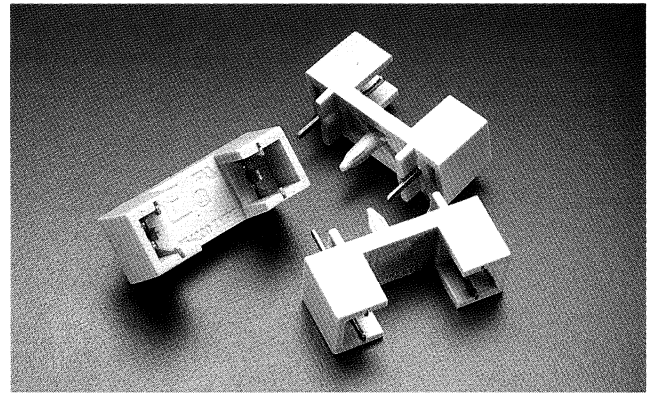

Note: Metric dimensions are shown. Inches are in parentheses.



### 5 x 20 mm P.C. Board Type

**SPECIFICATIONS:**

- Electrical:** Rated for currents up to 6.3 amperes, 250 volts.
- Clip/Terminals:** Tin plated spring brass. Ear type.
- Base:** Phenolic laminate. UL 94V0 flammability rating.
- Ambient Temperature:** 120°C maximum.

**ORDERING INFORMATION:**

Catalog Number	Number of Poles
520 002	1

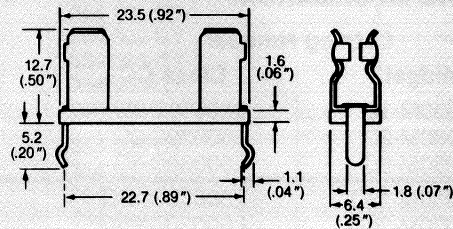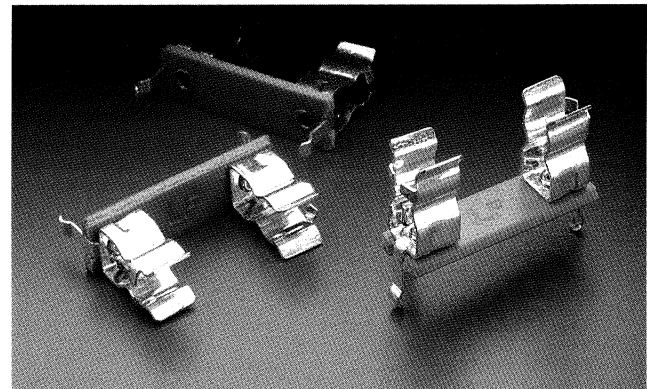

Note: Metric dimensions are shown. Inches are in parentheses.