


General Description

The AOK42S60 has been fabricated using the advanced α MOS™ high voltage process that is designed to deliver high levels of performance and robustness in switching applications.

By providing low $R_{DS(on)}$, Q_g and E_{OSS} along with guaranteed avalanche capability this device can be adopted quickly into new and existing offline power supply designs.

Features

$V_{DS} @ T_{j,max}$	700V
I_{DM}	166A
$R_{DS(ON),max}$	0.099 Ω
$Q_{g,typ}$	40nC
$E_{OSS} @ 400V$	9.2 μ J



Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	AOK42S60	Units
Drain-Source Voltage	V_{DS}	600	V
Gate-Source Voltage	V_{GS}	± 30	V
Continuous Drain Current	I_D	$T_C=25^\circ\text{C}$	A
		$T_C=100^\circ\text{C}$	
Pulsed Drain Current ^C	I_{DM}	166	
Avalanche Current ^C	I_{AR}	11	A
Repetitive avalanche energy ^C	E_{AR}	234	mJ
Single pulsed avalanche energy ^G	E_{AS}	1345	mJ
Power Dissipation ^B	P_D	$T_C=25^\circ\text{C}$	W
		Derate above 25°C	W/ $^\circ\text{C}$
MOSFET dv/dt ruggedness	dv/dt	100	V/ns
Peak diode recovery dv/dt ^H		20	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ\text{C}$
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds ^J	T_L	300	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	AOK42S60	Units
Maximum Junction-to-Ambient ^{A,D}	$R_{\theta JA}$	40	$^\circ\text{C/W}$
Maximum Case-to-sink ^A	$R_{\theta CS}$	0.5	$^\circ\text{C/W}$
Maximum Junction-to-Case	$R_{\theta JC}$	0.3	$^\circ\text{C/W}$

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}$, $V_{GS}=0\text{V}$, $T_J=25^\circ\text{C}$	600	-	-	V
		$I_D=250\mu\text{A}$, $V_{GS}=0\text{V}$, $T_J=150^\circ\text{C}$	650	700	-	
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=600\text{V}$, $V_{GS}=0\text{V}$	-	-	1	μA
		$V_{DS}=480\text{V}$, $T_J=150^\circ\text{C}$	-	10	-	
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}$, $V_{GS}=\pm 30\text{V}$	-	-	± 100	nA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=5\text{V}$, $I_D=250\mu\text{A}$	2.5	3.2	3.8	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}$, $I_D=21\text{A}$, $T_J=25^\circ\text{C}$	-	0.085	0.099	Ω
		$V_{GS}=10\text{V}$, $I_D=21\text{A}$, $T_J=150^\circ\text{C}$	-	0.24	0.28	Ω
V_{SD}	Diode Forward Voltage	$I_S=21\text{A}$, $V_{GS}=0\text{V}$, $T_J=25^\circ\text{C}$	-	0.84	-	V
I_S	Maximum Body-Diode Continuous Current		-	-	39	A
I_{SM}	Maximum Body-Diode Pulsed Current		-	-	166	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}$, $V_{DS}=100\text{V}$, $f=1\text{MHz}$	-	2154	-	pF
C_{oss}	Output Capacitance		-	135	-	pF
$C_{o(er)}$	Effective output capacitance, energy related ^H	$V_{GS}=0\text{V}$, $V_{DS}=0$ to 480V , $f=1\text{MHz}$	-	103	-	pF
$C_{o(tr)}$	Effective output capacitance, time related ^I		-	344	-	pF
C_{rss}	Reverse Transfer Capacitance	$V_{GS}=0\text{V}$, $V_{DS}=100\text{V}$, $f=1\text{MHz}$	-	2.7	-	pF
R_g	Gate resistance	$V_{GS}=0\text{V}$, $V_{DS}=0\text{V}$, $f=1\text{MHz}$	-	1.7	-	Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	$V_{GS}=10\text{V}$, $V_{DS}=480\text{V}$, $I_D=21\text{A}$	-	40	-	nC
Q_{gs}	Gate Source Charge		-	11.7	-	nC
Q_{gd}	Gate Drain Charge		-	11.9	-	nC
$t_{D(on)}$	Turn-On DelayTime	$V_{GS}=10\text{V}$, $V_{DS}=400\text{V}$, $I_D=21\text{A}$, $R_G=25\Omega$	-	38.5	-	ns
t_r	Turn-On Rise Time		-	53	-	ns
$t_{D(off)}$	Turn-Off DelayTime		-	136	-	ns
t_f	Turn-Off Fall Time		-	46	-	ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=21\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$, $V_{DS}=400\text{V}$	-	473	-	ns
I_{rm}	Peak Reverse Recovery Current	$I_F=21\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$, $V_{DS}=400\text{V}$	-	38.5	-	A
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=21\text{A}$, $dI/dt=100\text{A}/\mu\text{s}$, $V_{DS}=400\text{V}$	-	10.5	-	μC

A. The value of $R_{\theta JA}$ is measured with the device in a still air environment with $T_A=25^\circ\text{C}$.

B. The power dissipation P_D is based on $T_{J(MAX)}=150^\circ\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}=150^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{C}$.

D. The $R_{\theta JA}$ is the sum of the thermal impedance from junction to case $R_{\theta JC}$ and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using $<300\mu\text{s}$ pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(MAX)}=150^\circ\text{C}$. The SOA curve provides a single pulse rating.

G. $L=60\text{mH}$, $I_{AS}=6.7\text{A}$, $V_{DD}=150\text{V}$, Starting $T_J=25^\circ\text{C}$

H. $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 80% $V_{(BR)DSS}$.

I. $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 80% $V_{(BR)DSS}$.

J. Wavesoldering only allowed at leads.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

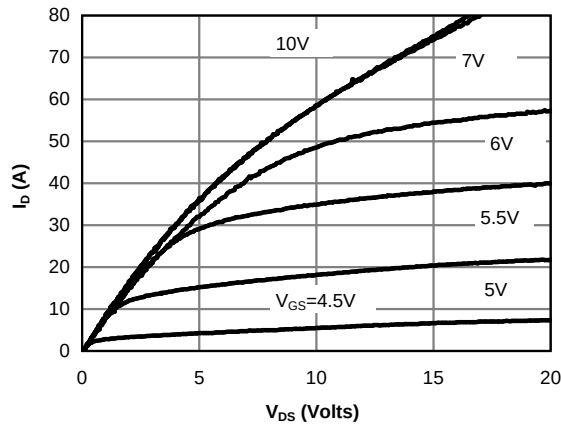


Figure 1: On-Region Characteristics@25°C

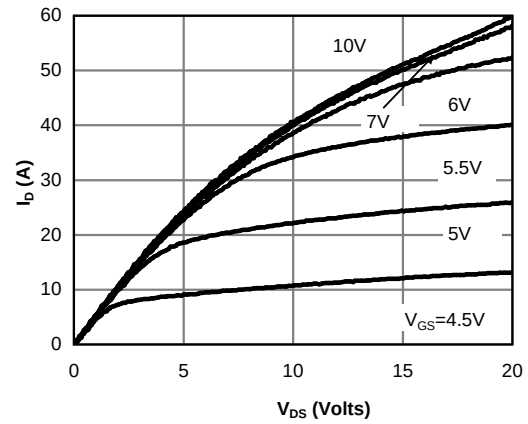


Figure 2: On-Region Characteristics@125°C

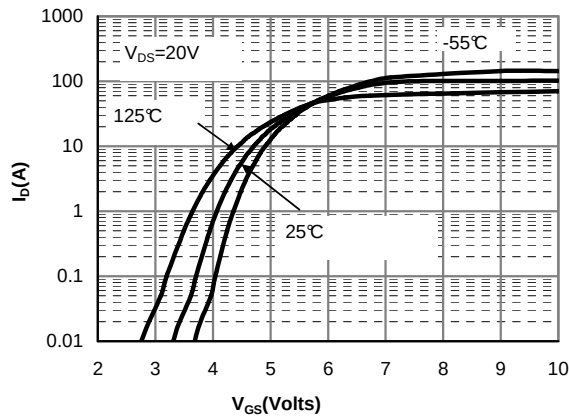


Figure 3: Transfer Characteristics

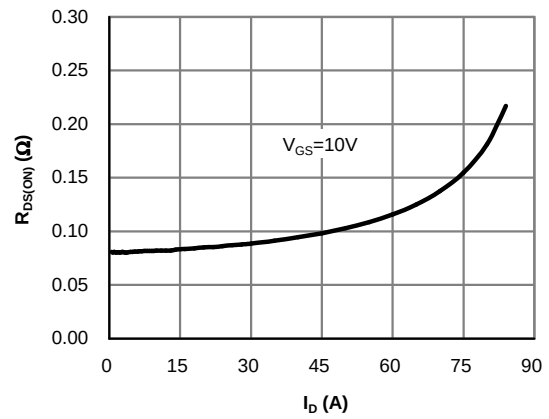


Figure 4: On-Resistance vs. Drain Current and Gate Voltage

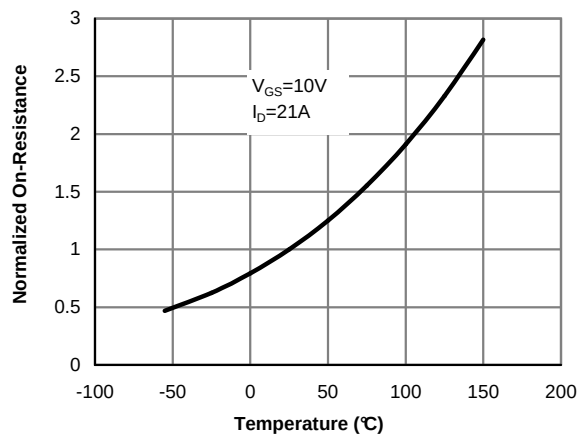


Figure 5: On-Resistance vs. Junction Temperature

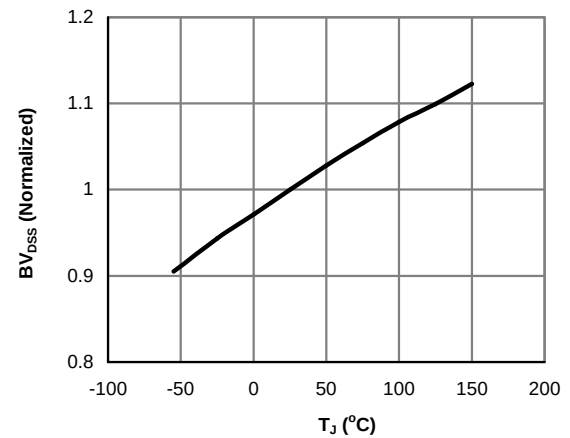


Figure 6: Break Down vs. Junction Temperature

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

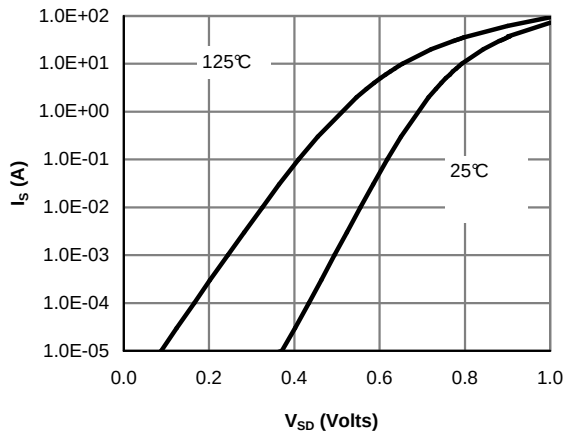


Figure 7: Body-Diode Characteristics (Note E)

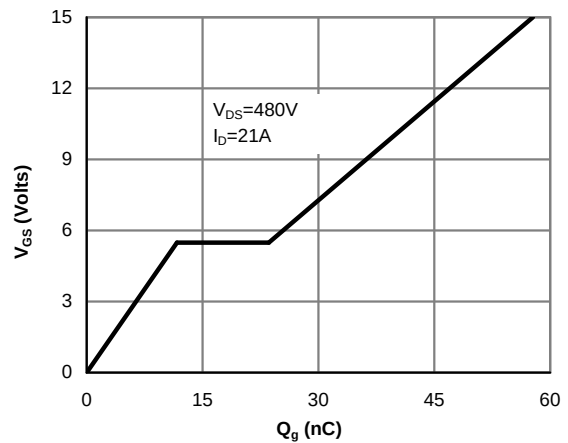


Figure 8: Gate-Charge Characteristics

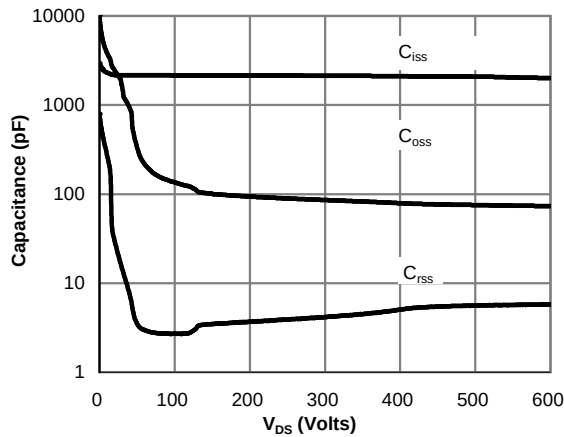


Figure 9: Capacitance Characteristics

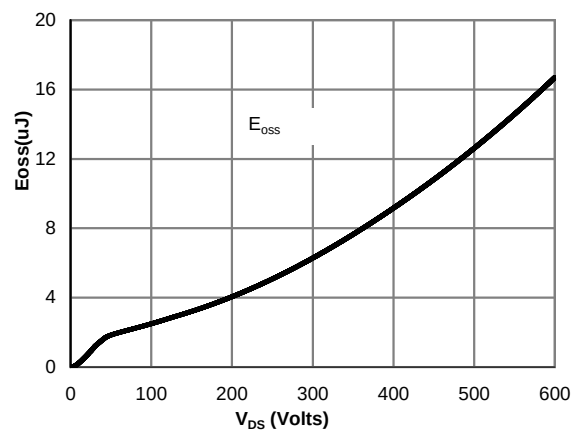


Figure 10: Coss stored Energy

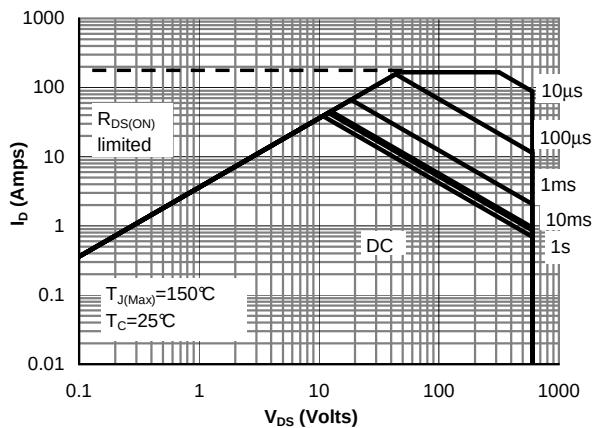


Figure 11: Maximum Forward Biased Safe Operating Area for AOK42S60(Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

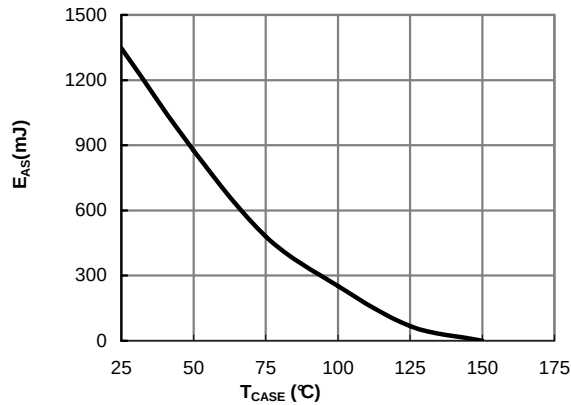


Figure 12: Avalanche energy

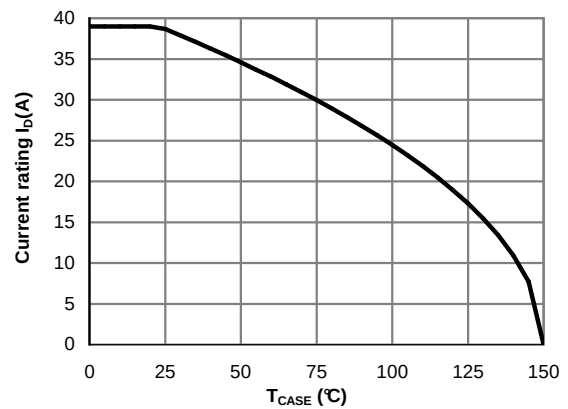


Figure 13: Current De-rating (Note B)





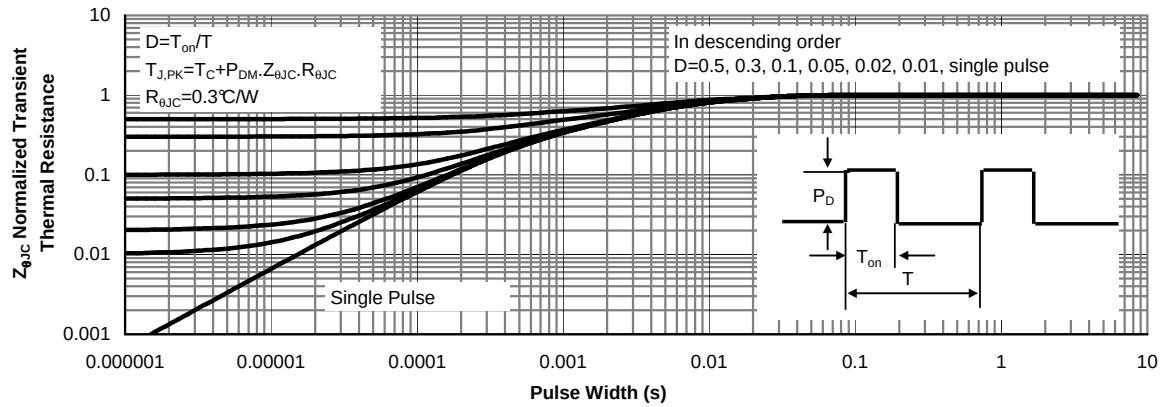


Figure 14: Normalized Maximum Transient Thermal Impedance for AOK42S60(Note F)



Gate Charge Test Circuit & Waveform

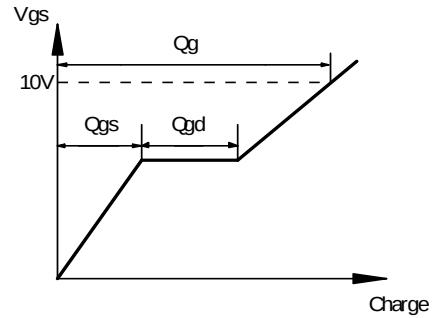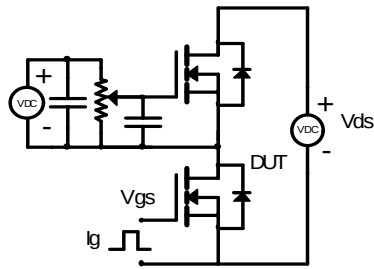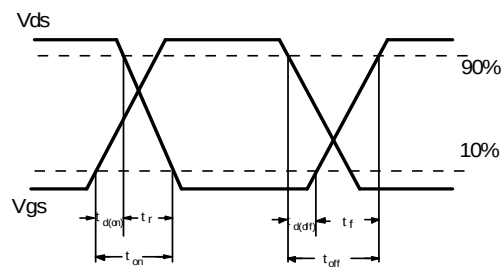

Resistive Switching Test Circuit & Waveforms

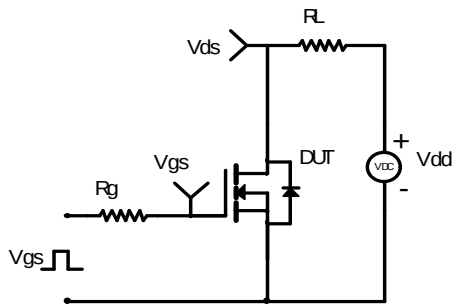

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

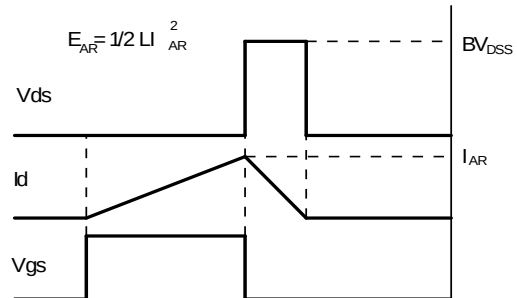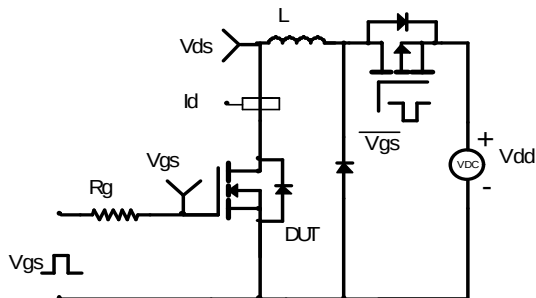

Diode Recovery Test Circuit & Waveforms

