



## FEATURES AND SPECIFICATIONS

### Features and Benefits

- 2 to 20 circuits
- Holds wires for secure, reliable contact
- Industry-standard interface
- End-to-end stackable
- High flammability rating

### Reference Information

UL : File No. E48521  
 Guide No. XCFR2  
 UL Recognized Component to US and  
 Canadian safety requirements

### Electrical

Voltage: 300V  
 Maximum Current: 10 Amp  
 Insulation Resistance: >5,000 Megaohms

### Mechanical


Rec. Tightening Torque: 2.5 in. lbs, .31 Nm  
 Operating Temperature: 140°C  
 Wire Strip Length: 1/4" or 6mm

### Physical

Housing: Polyamide 4/6, black  
 Screws: M2 Cheesehead, Silicon Bronze  
 Screw Plating: Nickel  
 Contacts: Beryllium Copper  
 Contact Plating: Hot Tin Dip  
 Pressure Clamp: Yellow Brass  
 Pressure clamp plating: Nickel  
 Wire Range: 16 to 24 AWG, 1.0 to 0.2mm<sup>2</sup>


## 3.5mm (.138") Pitch Beau Eurostyle® Pluggable PCB Terminal Block

**39351**  
**180° Wire Entry**



**35 Series**

## CATALOG DRAWING (FOR REFERENCE ONLY)

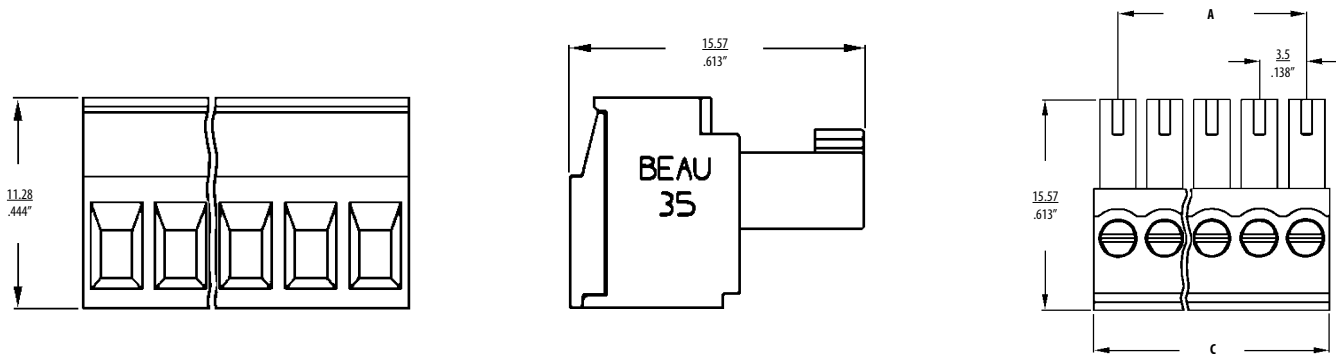

## ORDERING INFORMATION AND DIMENSIONS

Order# Replace XX with # of circuits, 02-20

### Right Angle

**Tin Plated**  
 39351-00XX

**Gold Plated**  
 39351-01XX

# of Circuits	A		C	
	in	mm	in	mm
2	.14	3.50	.28	7.11
3	.28	7.00	.41	10.41
4	.41	10.50	.55	13.97
5	.55	14.00	.69	17.53
6	.69	17.50	.83	21.08
7	.83	21.00	.97	24.64
8	.96	24.50	1.10	27.94
9	1.10	28.00	1.24	31.50
10	1.24	31.50	1.38	35.05
11	1.38	35.00	1.52	38.61

# of Circuits	A		C	
	in	mm	in	mm
12	1.52	38.50	1.65	41.91
13	1.65	42.00	1.79	45.47
14	1.79	45.50	1.93	49.02
15	1.93	50.00	2.07	52.58
16	2.07	52.50	2.21	56.13
17	2.20	56.00	2.34	59.44
18	2.34	59.50	2.48	62.99
19	2.48	63.00	2.62	66.55
20	2.62	66.50	2.76	70.10

\*Consult factory for imprinting and other options