


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	119.24	119.32	119.4
Insertion Loss	dB		23.5	25
3dB Bandwidth	MHz	1.23	1.26	
30dB Bandwidth	MHz		1.9	2.05
40dB Bandwidth	MHz		1.98	2.35
50dB Bandwidth	MHz		2.02	2.65
Passband Variation	dB		0.5	1
Absolute Delay	usec		3.54	4
Group Delay Variation($f_0 \pm 492\text{kHz}$)	nsec		100	300
Phase Linearity($f_0 \pm 492\text{kHz}$)	degree		3	
Ultimate Rejection	dB	50	52	
Substrate Material			quartz	
Ambient Temperature	°C		25	
Package Size		DIP2712 (27.0x12.8x4.7mm ³)		

Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show


Matching Configuration

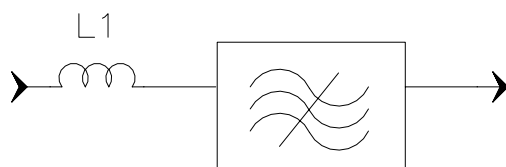


L1=47nH

Source/Load Impedance=50 ohm

Notes - Component values may change depending on board layout.

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBS11901	
		Rev. Date	2005-4-11	
		Rev.	1.0	Page

Package Dimension

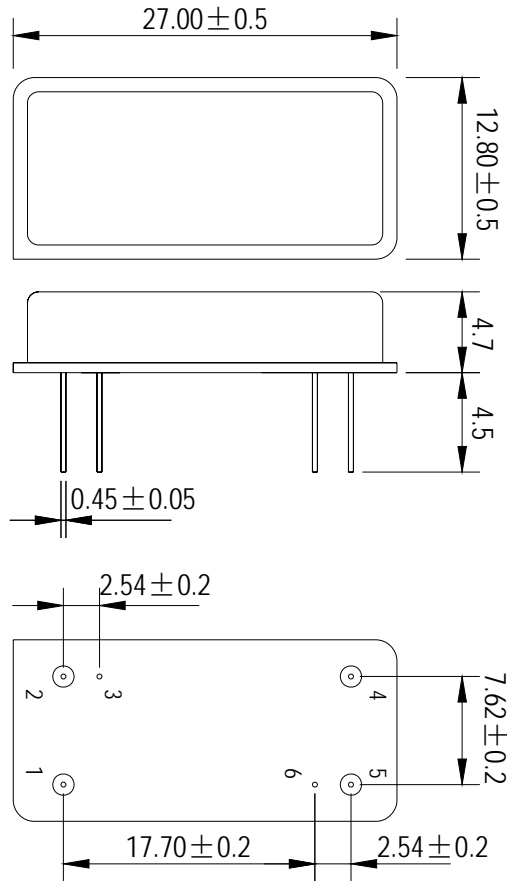

Pin 1: input
Pin 5: output
Others: Grounded




SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060


Part Number	LBS11901	
Rev. Date	2005-4-11	
Rev.	1.0	Page 2/3

Typical Performance


Frequency Respond

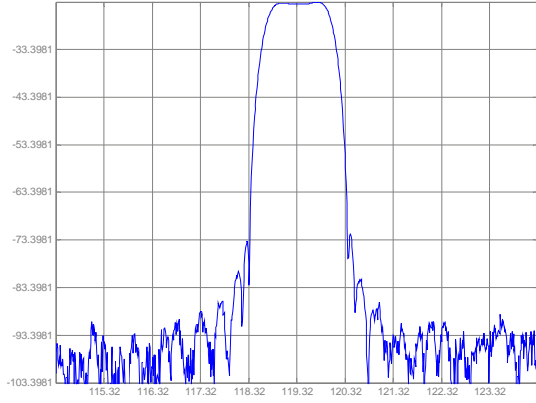


Passband Respond

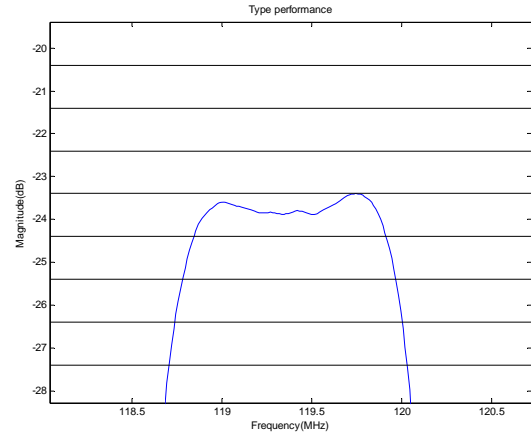


Group Delay Variation($f_0 \pm 492\text{kHz}$)

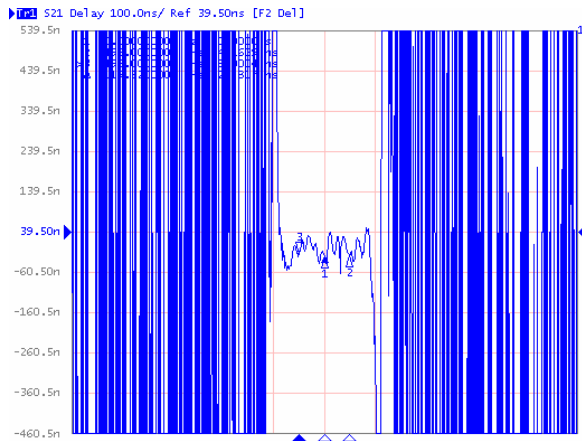


Phase Linearity($f_0 \pm 492\text{kHz}$)

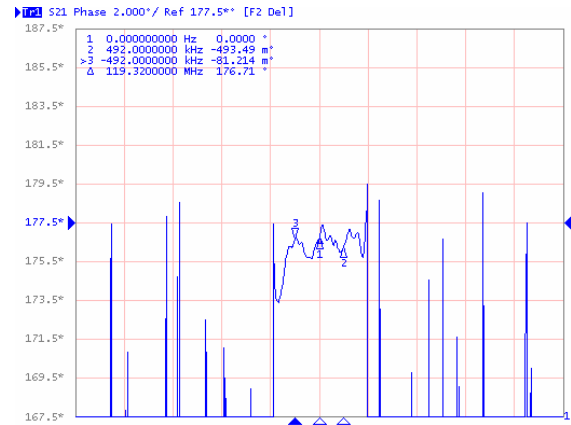

Smith Chart S11

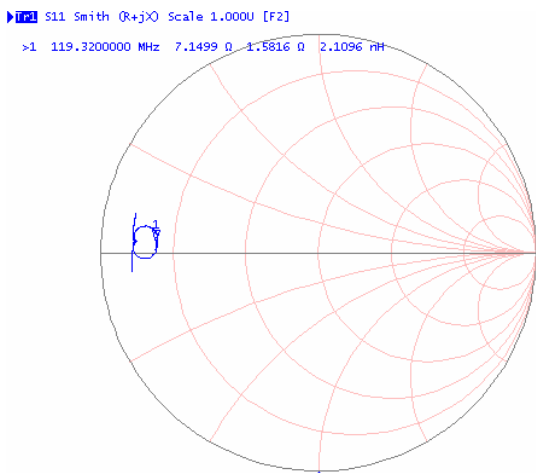

Smith Chart S22

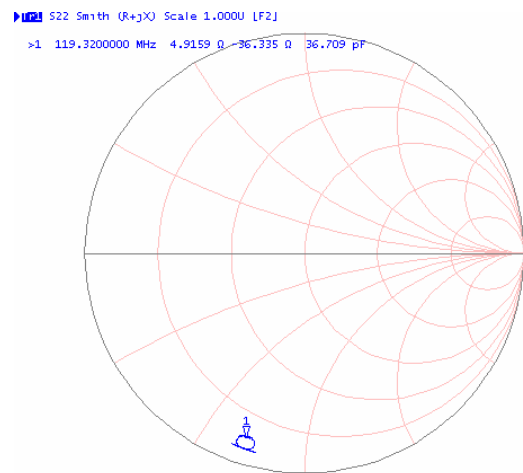

SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number

LBS11901

Rev. Date

2005-4-11

Rev.

1.0

Page 3/3