


Features

- ✧ Small surface mounting type.
- ✧ Small package.
- ✧ Low forward voltage: $V_F = 0.23V$ (typ).

Applications

- ✧ For general purpose applications.

SOT-323

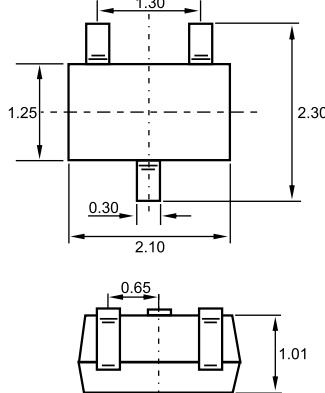

Dimensions in inches and (millimeters)

Ordering Information

Type No.	Marking	Package Code
1SS372	N9	SOT-323

MAXIMUM RATING @ $T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Limits	Unit
Non-Repetitive Peak reverse voltage	V_{RM}	15	V
Diode reverse voltage	V_R	10	V
Forward continuous Current	I_F	200	mA
Forward Surge Current (10ms)	I_{FSM}	1	A
Power Dissipation	P_d	100	mW
Junction temperature	T_j	125	$^\circ\text{C}$
Storage temperature range	T_{stg}	-55-+125	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	MIN	Typ.	MAX	UNIT
Reverse current	I_R	$V_R=10\text{V}$			20	μA
Forward voltage	V_F	$I_F=1\text{mA}$ $I_F=5\text{mA}$ $I_F=100\text{mA}$		0.18 0.3	0.5	V
Diode capacitance	C_D	$V_R=0\text{V}, f=1\text{MHz}$			40	pF