



1. Dimensions:

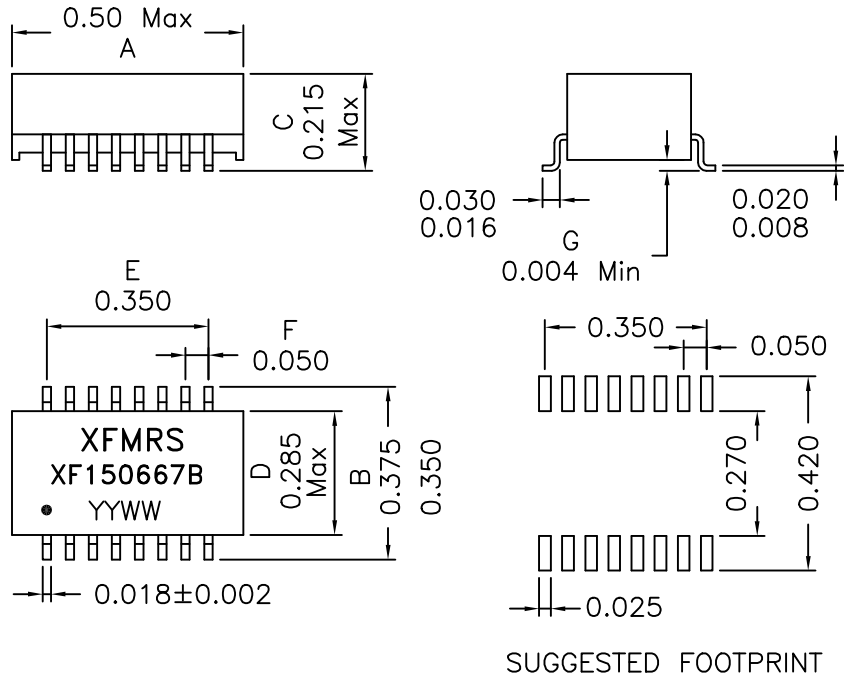

2. Schematic:

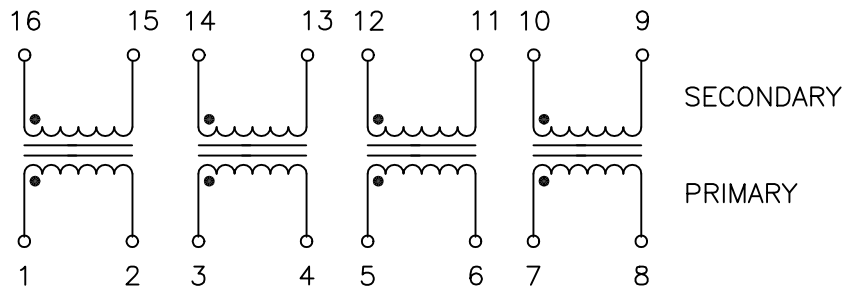

3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: 1:1 ±5% (Pri/Sec)

PRI OCL: 150uH±30% @100KHz 20mV

PRI/SEC Cw/w: 12pF Max. @100KHz 20mV

PRI LL: 0.25uH Max. @100KHz 20mV (SEC Shorted)

DC Resistance: 0.40 Ohms Max.

Notes:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Temperature rating: 155°C. UL file E151556
- Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC. REV. B/3

XFMRs Inc	Title: 10 BASE ISOLATION MAGNETICS	
	UNLESS OTHERWISE SPECIFIED	P/N: XF150667B
	TOLERANCES: .xxx ±0.010	REV. B
	Dimensions in Inch	DWN. 李小锋 Apr-09-02
SCALE 2.5:1 SHT 1 OF 1	CHK. 廖玉坤 Apr-09-02	
	APP. Isaiah M	Apr-09-02