# Tactile Switches 6mm × 6mm Radial Taped Side Push

## ■Features

- Reliable contact by proprietary contact construction
- Crisp clicking by tactile feedback
- Unique design and insert moulded terminal against the flux rise
- Anti-sulfide terminal
- Radial taping for auto insertion and dip soldering



## ■Dimensions (Unit: mm)

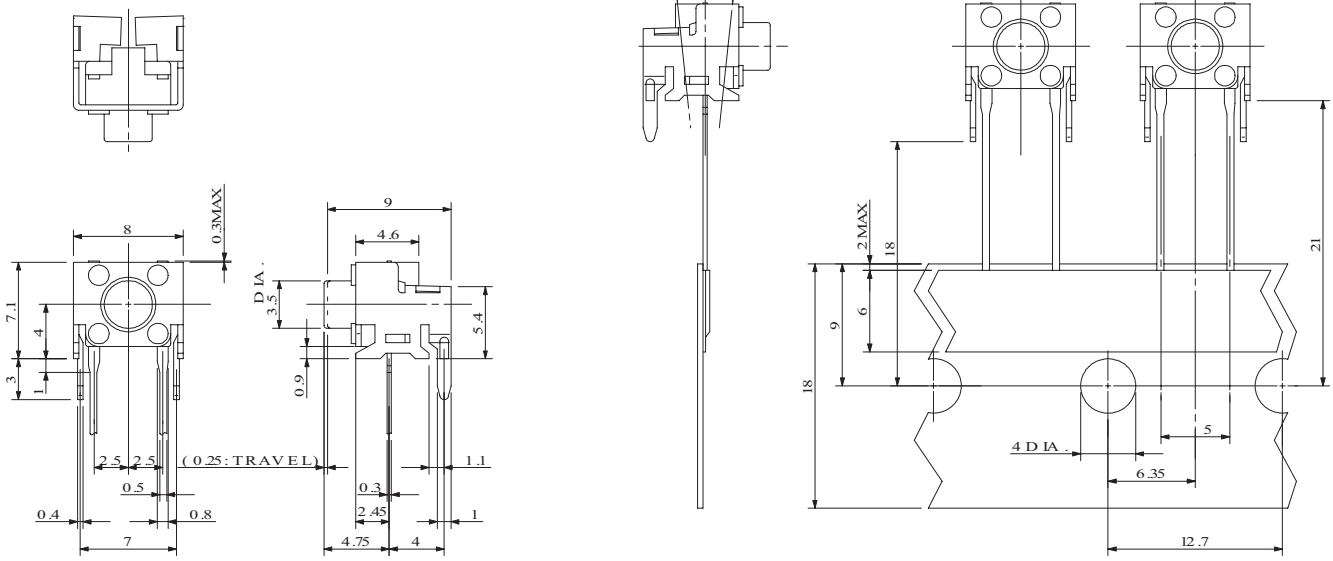


## ■Specification

| Item | Specification | Unit | Note |
|---|---|---|---|
| Operating Temperature Range | -25~+70 | ℃ | |
| Storage Temperature Range | -40~+85 | ℃ | |
| Type of Operation | Tactile Feedback | | |
| Contact Configuration | Push-On Momentary, 1 Pole-1 Throw | | |
| Power Rating | Max. 20mA 15VDC | | |
| Contact Resistance | Max. 100 | mΩ | |
| Insulation Resistance | 100MΩ Min. at 100VDC | | |
| Dielectric Withstand Voltage | 250 VAC for 1 Minute | | |
| Contact Bounce | Max. 5 | ms | |
| Operating Force | 0.98±0.49 | N | A Type |
| Operating Force | 1.57±0.49 | N | B Type |
| Return Force | Min. 0.10 | N | A Type |
| Return Force | Min. 0.49 | N | B Type |
| Travel | 0.25 -0.1/+0.2 | mm | |

## ■Model Designation

KSH S6 3 6 A TS

- TS — Taping
- A — Operating Force
- 6 — Mounting Height
- 3 — Terminal Option
- S6 — Size
- KSH — Model No.



Specifications are subject to change without notice.