
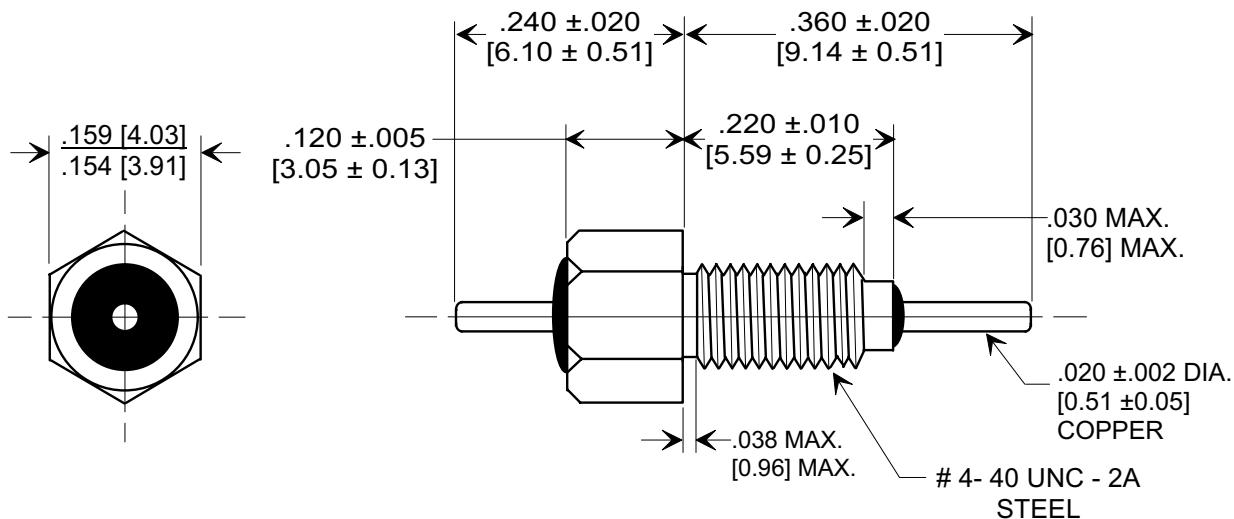



**Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.**

MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

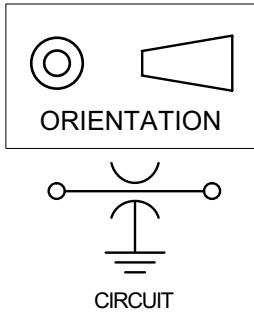

MOUNTING HARDWARE

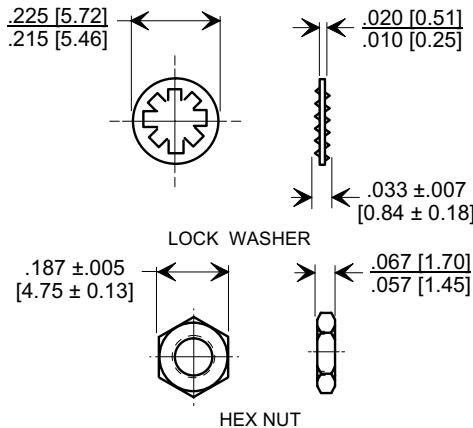

NOTES:

1. TUSONIX STANDARD PART NUMBER: 4400-002.
TUSONIX RoHS COMPLIANT PART NUMBER: 4400-002 LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
 2. LEAD, BUSHING, AND MOUNTING HARDWARE: SILVER PLATED.
 3. PART MARKING: TRADEMARK AND VARIATION NUMBER ON HEX FLATS. STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
 4. OPERATING TEMPERATURE RANGE : -55°C TO +125°C.
 5. MAX. RECOMMENDED SOLDERING TEMPERATURE: 260°C.
 6. SUPPLIED WITH HEX NUT AND INTERNAL TOOTH LOCK WASHER.
 7. MAX. RECOMMENDED MOUNTING TORQUE - 2.0 lb.-in. [.226 Nm].

1200	GMV	300	200	10 G Ω	500	10	----	5	20	35	45
CAP.(pf)	TOLERANCE	85°C	125°C	I.R. MIN. @ 100 (VDC.)	DWV (VDC)	DC CURRENT (AMPS)	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		DC WORKING VOLTAGE					MIN. NO LOAD INSERTION LOSS (dB) @ 25°C PER MIL-STD-220				

REVISION RECORD			
Original Release C.O.	0	REDRAWN & REVISED ADDED 008.009. E.C. 05-30-90	
5261	10	VARS 005,006,007 & 1MHz COLUMN ADDED. L.E. 11-07-90	
5591	11	RDN TO COMP FMT & ADDED METRIC. S.M. 11-08-01	12
20000926-3-01		REVISED DWG. DRAWING MADE FOR EACH VAR. S.M. 12-02-02	
20021125-1-03		10 (AMPS) WAS 5 (AMPS) L.E. 06-23-04	13
20040621-1-03		ADDED AND REVISED NOTES. S.M. 12-14-05	14
20051122-2-04			15
<p style="text-align: center;">--TOLERANCES-- Unless Otherwise Specified</p> <p>DECIMAL ± NOTED</p> <p>ANGLES ±</p>			
		Drawn S.M. 11-07-01	Scale 5 X
		Approved B.Mc 11-07-01	
		A	4400-002