

Surface Mount Schottky Diode

● Applications

Low current rectification

● Features

- 1) Small surface mounting type.
- 2) High reliability.

We declare that the material of product compliance with RoHS requirements.

● Construction

Silicon epitaxial planar

● Device marking and ordering information

Device	Marking	Shipping
LRB501V-40T1G	4	3000/Tape&Reel
LRB501V-40T3G	4	10000/Tape&Reel

LRB501V-40T1G



● Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Limits	Unit
Peak reverse voltage	V _{RM}	45	V
DC reverse voltage	V _R	40	V
Mean rectifying current	I _o	0.1	A
Peak forward surge current*	I _{FSM}	1	A
Junction temperature	T _j	125	°C
Storage temperature	T _{stg}	-40~+125	°C
Power Dissipation	P _D	200	mW

* 60 Hz for 1ms

● Electrical characteristics (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V _{F1}	-	-	0.55	V	I _F =100mA
Forward voltage	V _{F2}	-	-	0.34	V	I _F =10mA
Reverse current	I _R	-	-	30	μA	V _R =10V
Capacitance between terminals	C _T	-	6.0	-	pF	V _R =10V, f=1MHz

Note) ESD sensitive product handling required.

● Electrical characteristic curves ($T_a = 25^\circ\text{C}$)

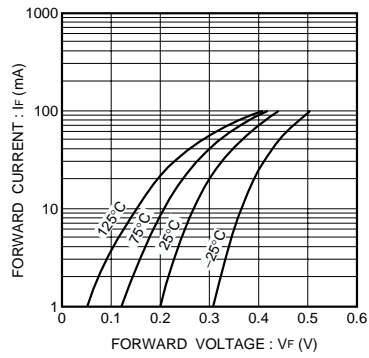


Fig. 1 Forward characteristics

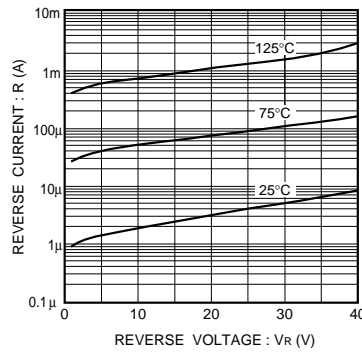


Fig. 2 Reverse characteristics

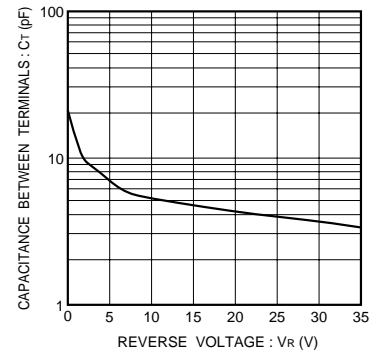


Fig. 3 Capacitance between terminals characteristics


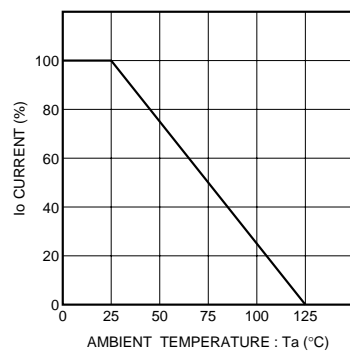


Fig. 4 Derating curve

SOD-323

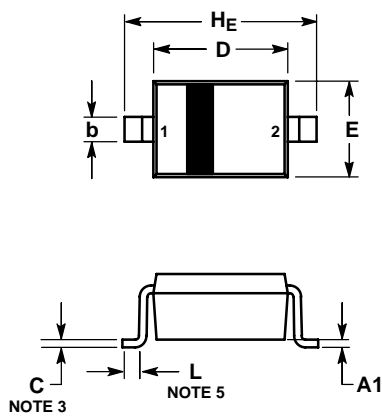

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. LEAD THICKNESS SPECIFIED PER L/F DRAWING WITH SOLDER PLATING.
4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
5. DIMENSION L IS MEASURED FROM END OF RADIUS.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.80	0.90	1.00	0.031	0.035	0.040
A1	0.00	0.05	0.10	0.000	0.002	0.004
A3	0.15 REF			0.006 REF		
b	0.25	0.32	0.4	0.010	0.012	0.016
C	0.089	0.12	0.177	0.003	0.005	0.007
D	1.60	1.70	1.80	0.062	0.066	0.070
E	1.15	1.25	1.35	0.045	0.049	0.053
L	0.08			0.003		
HE	2.30	2.50	2.70	0.090	0.098	0.105

SOLDERING FOOTPRINT*

