

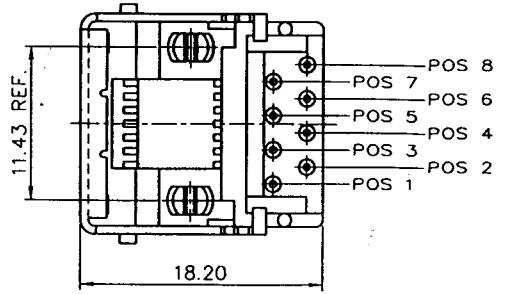
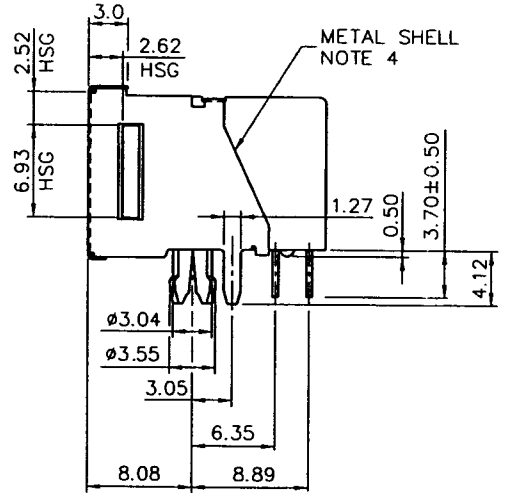


Tous droits strictement réservés. Reproduction ou communication, en tout ou en partie, sans autorisation écrite du propriétaire.
All rights strictly reserved. Reproduction or communication, in whole or in part, without written authority from the proprietor.
Copyright BERG ELECTRONICS BY

All rights strictly reserved. Reproduction or communication, in whole or in part, without written authority from the proprietor.
Copyright BERG ELECTRONICS BY

D

PRODUCT NO	NUMBER OF POS.	LOADED POSITION
74584-X88	8	ALL POS.
74584-X86		2,3,4,5,6,7
74584-X84		3,4,5,6
74584-X84A		1,2,3,6

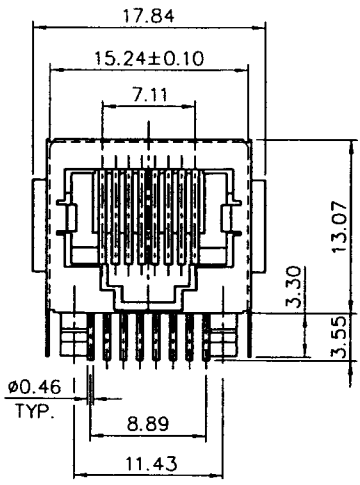


MOD JACK ASS'Y

METAL SHELL
NOTE 4

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: NYLON 66, 25% GLASS REINFORCED, BLACK.
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000, ϕ 0.460 ROUND WIRE, PLATING SEE TABLE.
- ④ METAL SHELL MATERIAL:
COPPER ALLOY, 0.20MM THICK.
PLATING: 100 μ " TIN-LEAD.
5. STANDARD PACKAGING: USING TUBE.

PLATING CODE X	PLATING
0	30 μ " G.X.T.
1	15 μ " GOLD.
2	20 μ " GFPD.
3	30 μ " GOLD.
5	50 μ " GOLD.

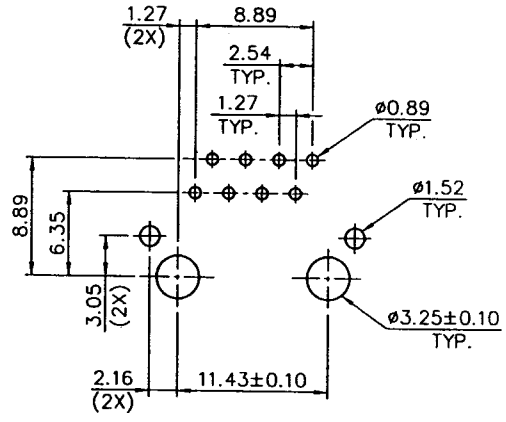

RECOMMENDED PCB LAYOUT
COMPONENT SIDE

mat'l code				tolerance unless otherwise specified		CUSTOMER COPY		BERG ELECTRONICS	
rev.	ecn no.	dr	date	linear	.0 $\pm$ 0.25 .00 $\pm$ 0.13 .000 $\pm$ 0.05	projection	title	LOW PROFILE PCB III 8 POS SPECIAL SHIELDED MOD JACK	
A	T80395	M W	09/04/98	angles	$\pm$ 2°		product family	MOD JACK	code
				dr	DKLIN 07/06/94	unit	size	mm/inch	TWN
				enqr	TONY CHIEN 07/06/94	scale	dwg no.	74584	sheet
				chr	TONY CHIEN 07/06/94	2.5:1			1 OF 1
				appd	JENN TSAO 07/06/94				
sheet	revision	A		index	sheet	1			