


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

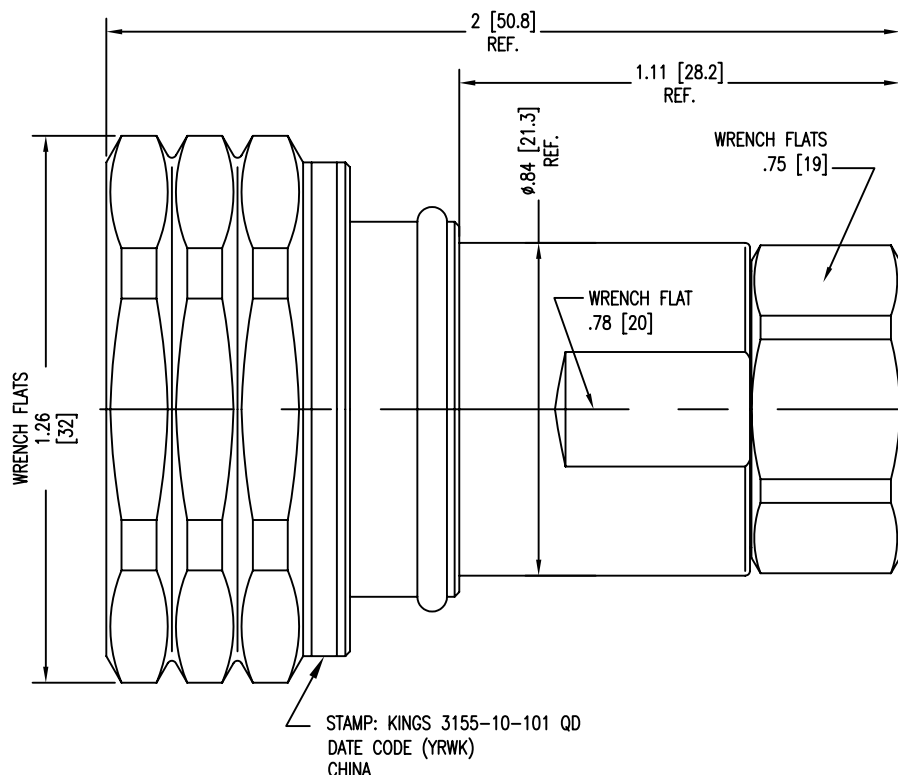

NOTES:

- FOR USE WITH ANDREWS FSJ4-50B AND FSJ4RN-50B CABLE (1/2 IN HELIAX).
- INTERFACE PER, IEC STANDARD 169-4 (TYPE 7-16 MM).
- DIMENSIONS SHOWN IN INCHES [MM].
- FOR CABLING INSTRUCTIONS SEE 3-778.
- MATERIALS:
O RINGS & GASKET: SILICONE RUBBER.
INSULATOR: TEFLON.
CENTER CONTACT: BERYLLIUM COPPER.
ALL METAL PARTS: BRASS.
- FINISHES:
CENTER CONTACT: SILVER PLATE.
ALL METAL PARTS: NICKLE AND SILVER PLATE.
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS.
FREQUENCY RANGE: DC TO 6.0 GHz.
WORKING VOLTAGE: 884 VRMS (CABLE LIMITED)
- PARTS MUST BE PACKAGED ACCORDING TO QSI-PKG-002.

GSD

3155-10-101 QD

REVISIONS	
ISSUE	CHANGES
2	ER 39441 DCT 5/4/6
SCALE 2:1	
APPROX SURFACE AREA	
USED ON	
REF:	
7-16, PLUG, STRAIGHT	
DRAWN DCT	DATE 4/20/6
DESIGN	DATE
APPR.	DATE
 ROCK HILL, SOUTH CAROLINA 29730	
3155-10-101 QD	

GSD