
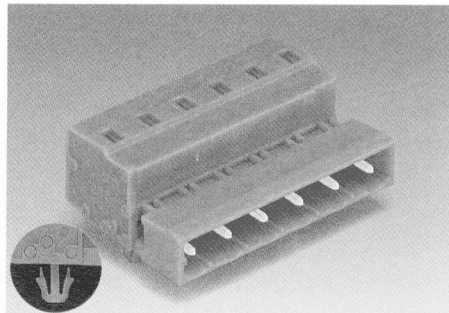
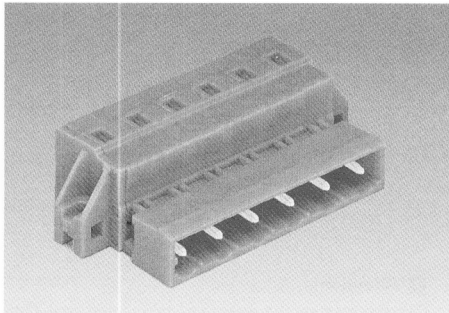


Male Connectors with CAGE CLAMP®,
Pin Spacing 7.62 mm / 0.3 in, Orange

Pin spacing 7.62 mm/0.3 in, orange
0.08 – 2.5 mm² | AWG 28 – 12
400 V/6 kV/3 | 300 V, 15 A
12 A | 300 V, 15 A
8 – 9 mm / 0.33 in

Pin spacing 7.62 mm/0.3 in, orange
0.08 – 2.5 mm² | AWG 28 – 12
400 V/6 kV/3 | 300 V, 15 A
12 A | 300 V, 15 A
8 – 9 mm / 0.33 in

Pin spacing 7.62 mm/0.3 in, orange
0.08 – 2.5 mm² | AWG 28 – 12
400 V/6 kV/3 | 300 V, 15 A
12 A | 300 V, 15 A
8 – 9 mm / 0.33 in

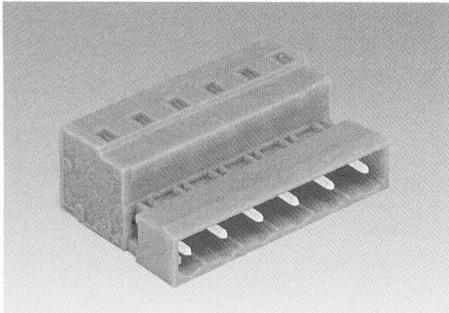


No. of poles	Item-No.	No. of poles	Item-No.	No. of poles	Item-No.
Male connectors with CAGE CLAMP®, orange		Male connectors with CAGE CLAMP® and fixing flanges, orange, for screw fixing or similar methods, for vertical or horizontal fixing		Male connectors with CAGE CLAMP® and snap-in mounting feet, orange, for plate thickness 0.6 mm – 1.2 mm, fixing hole Ø 3.5 mm (or with mounting adapter 209-137 for DIN 35 rail)	
2	731-632	2	731-632/019-000	2	731-632/018-000
3	731-633	3	731-633/019-000	3	731-633/018-000
4	731-634	4	731-634/019-000	4	731-634/018-000
5	731-635	5	731-635/019-000	5	731-635/018-000
6	731-636	6	731-636/019-000	6	731-636/018-000
7	731-637	7	731-637/019-000	7	731-637/018-000
8	731-638	8	731-638/019-000	8	731-638/018-000
9	731-639	9	731-639/019-000	9	731-639/018-000
10	731-640	10	731-640/019-000	10	731-640/018-000
11	731-641	11	731-641/019-000	11	731-641/018-000
12	731-642	12	731-642/019-000	12	731-642/018-000

Accessories (please refer to remarks concerning coding on page 4.83)

	Coding key, snap-on type, light grey 231-130		Coding key, snap-on type, light grey 231-130		Coding key, snap-on type, light grey 231-130
	Separator, for formation of groups, light grey 231-500		Separator, for formation of groups, light grey 231-500		Separator, for formation of groups, light grey 231-500
	Insulation stop, 5 pcs/strip 0.08 - 0.2 mm² (white) 231-673 0.25 - 0.5 mm² (light gr.) 231-674 0.75 - 1 mm² (dark grey) 231-675		Tapping screw, B 2.2 x 9.5 fixing hole Ø 1.8 mm 209-147		Mounting adapter, for DIN 35 rail, grey 209-137
	0.2 mm² solid/0.14 mm² f-st		Insulation stop, 5 pcs/strip Description and item-Nos. on the left		Insulation stop, 5 pcs/strip Description and item-Nos. on the left
	Marker strips, self-adhesive 1-15 (20 x) 249-155/210-224		Marker strips, self-adhesive 1-15 (20 x) 249-155/210-224		Marker strips, self-adhesive 1-15 (20 x) 249-155/210-224

Dimensions (in mm) A = (No. of poles – 1) x pin spacing + 5.08 mm + 3.2 mm B = A – 1.7 mm C = A – 1.2 mm D = A – 0.2 mm E = D + 5.8 mm F = D + 11.8 mm

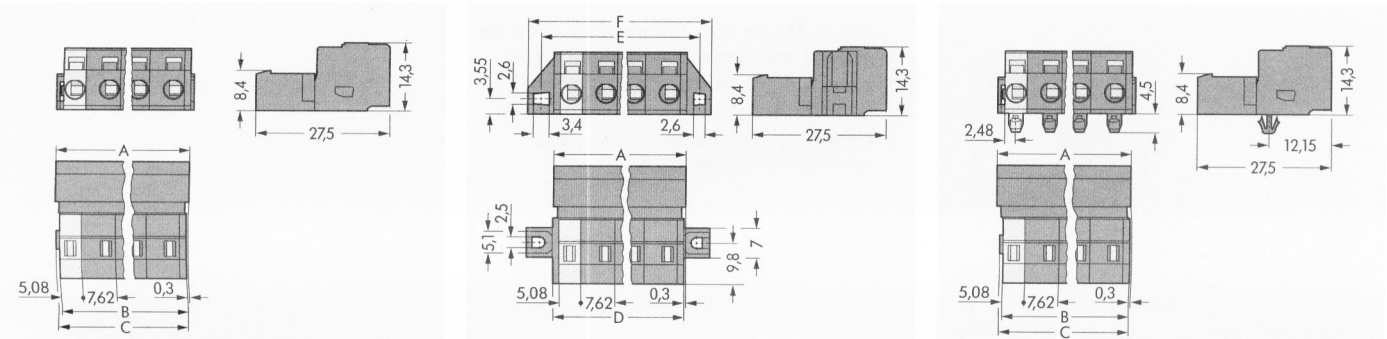

* For further approvals with corresponding ratings see pages 10.3 ff.