

SPLIT BOBBIN P.C. BOARD TRANSFORMERS



ST AND DST pc board transformers use a "split bobbin" which allows the primaries and secondaries to be wound non-concentrically, (i.e., side by side rather than one over the other). This has the advantages of cost savings and superior performance, primarily:

- High isolation—2500V RMS hipot is standard.
- Class B insulation—130°C.
- Low capacitive coupling no electro-static shield is necessary.
- Less manufacturing time no cross-overs of primary and secondary leads.
- PC pins allow direct insertion in PC boards.

Each transformer is available with single 115V or dual 115/230V primaries. In addition, secondaries are split so that they can be series or parallel connected. Variations can be made to meet special needs.

SINGLE
115V PRIMARY
6 PIN TYPE ST

DUAL
115/230V PRIMARY
8 PIN TYPE DST

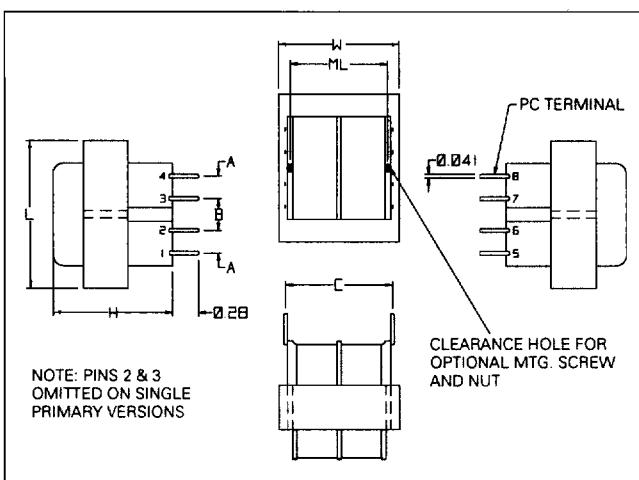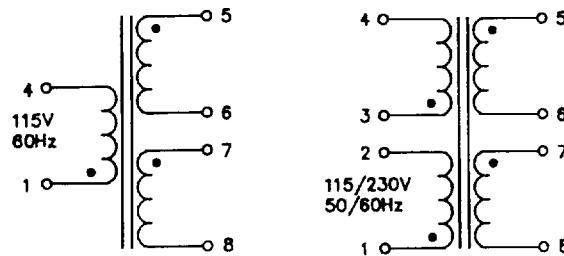

Size	VA	L	W	H	ML	A	B	C	Optional Mtg. Screw & Nut	LBS.
2	1.1	1 3/8	1 1/8	15/16	—	.250	.250	1.200	None	0.17
3	2.4	1 3/8	1 1/8	1 3/16	—	.250	.250	1.200	None	0.25
4	6	1 5/8	1 5/16	1 5/8	1 1/16	.250	.350	1.280	4-40 x 1 3/8 Nylon	0.44
5	12	1 7/8	1 9/16	1 7/16	1 1/4	.300	.400	1.410	4-40 x 1 3/8 Nylon	0.70
6	20	2 1/4	1 7/8	1 7/16	1 1/2	.300	.400	1.600	4-40 x 1 3/8 Nylon	0.80
7	36	2 5/8	2 3/16	1 9/16	†	.400	.400	1.850	†	1.1

PART NUMBER	SECONDARY RMS RATING		
Single 115V 6 Pin	Dual 115/230V 8 Pin	Series	Parallel
ST 2-10	DST 2-10	10V C.T. @ 0.11A	5V @ 0.22A
ST 3-10	DST 3-10	10V C.T. @ 0.25A	5V @ 0.5A
ST 4-10	DST 4-10	10V C.T. @ 0.6A	5V @ 1.2A
ST 5-10	DST 5-10	10V C.T. @ 1.2A	5V @ 2.4A
ST 6-10	DST 6-10	10V C.T. @ 2A	5V @ 4A
ST 7-10	DST 7-10	10V C.T. @ 3.6A	5V @ 7.2A
ST 2-12	DST 2-12	12.6V C.T. @ 0.09A	6.3V @ 0.18A
ST 3-12	DST 3-12	12.6V C.T. @ 0.2A	6.3V @ 0.4A
ST 4-12	DST 4-12	12.6V C.T. @ 0.5A	6.3V @ 1.0A
ST 5-12	DST 5-12	12.6V C.T. @ 1.0A	6.3V @ 2.0A
ST 6-12	DST 6-12	12.6V C.T. @ 1.6A	6.3V @ 3.2A
ST 7-12	DST 7-12	12.6V C.T. @ 2.85A	6.3V @ 5.7A
ST 2-16	DST 2-16	16V C.T. @ 0.07A	8V @ 0.14A
ST 3-16	DST 3-16	16V C.T. @ 0.15A	8V @ 0.3A
ST 4-16	DST 4-16	16V C.T. @ 0.4A	8V @ 0.8A
ST 5-16	DST 5-16	16V C.T. @ 0.8A	8V @ 1.6A
ST 6-16	DST 6-16	16V C.T. @ 1.25A	8V @ 2.5A
ST 7-16	DST 7-16	16V C.T. @ 2.25A	8V @ 4.5A
ST 2-20	DST 2-20	20V C.T. @ 0.055A	10V @ 0.11A
ST 3-20	DST 3-20	20V C.T. @ 0.12A	10V @ 0.24A
ST 4-20	DST 4-20	20V C.T. @ 0.3A	10V @ 0.6A
ST 5-20	DST 5-20	20V C.T. @ 0.6A	10V @ 1.2A
ST 6-20	DST 6-20	20V C.T. @ 1A	10V @ 2A
ST 7-20	DST 7-20	20V C.T. @ 1.8A	10V @ 3.6A
ST 2-24	DST 2-24	24V C.T. @ 0.045A	12V @ 0.09A
ST 3-24	DST 3-24	24V C.T. @ 0.1A	12V @ 0.2A
ST 4-24	DST 4-24	24V C.T. @ 0.25A	12V @ 0.5A
ST 5-24	DST 5-24	24V C.T. @ 0.5A	12V @ 1.0A
ST 6-24	DST 6-24	24V C.T. @ 0.8A	12V @ 1.6A
ST 7-24	DST 7-24	24V C.T. @ 1.5A	12V @ 3.0A
ST 2-28	DST 2-28	28V C.T. @ 0.04A	14V @ 0.08A
ST 3-28	DST 3-28	28V C.T. @ 0.085A	14V @ 0.17A
ST 4-28	DST 4-28	28V C.T. @ 0.2A	14V @ 0.4A
ST 5-28	DST 5-28	28V C.T. @ 0.42A	14V @ 0.84A
ST 6-28	DST 6-28	28V C.T. @ 0.7A	14V @ 1.4A
ST 7-28	DST 7-28	28V C.T. @ 1.3A	14V @ 2.6A
ST 2-36	DST 2-36	36V C.T. @ 0.03A	18V @ 0.06A
ST 3-36	DST 3-36	36V C.T. @ 0.065A	18V @ 0.13A
ST 4-36	DST 4-36	36V C.T. @ 0.17A	18V @ 0.34A
ST 5-36	DST 5-36	36V C.T. @ 0.35A	18V @ 0.7A
ST 6-36	DST 6-36	36V C.T. @ 0.55A	18V @ 1.1A
ST 7-36	DST 7-36	36V C.T. @ 1A	18V @ 2A
ST 2-48	DST 2-48	48V C.T. @ 0.023A	24V @ 0.046A
ST 3-48	DST 3-48	48V C.T. @ 0.05A	24V @ 0.1A
ST 4-48	DST 4-48	48V C.T. @ 0.125A	24V @ 0.25A
ST 5-48	DST 5-48	48V C.T. @ 0.25A	24V @ 0.5A
ST 6-48	DST 6-48	48V C.T. @ 0.4A	24V @ 0.8A
ST 7-48	DST 7-48	48V C.T. @ 0.75A	24V @ 1.5A
ST 2-56	DST 2-56	56V C.T. @ 0.02A	28V @ 0.04A
ST 3-56	DST 3-56	56V C.T. @ 0.045A	28V @ 0.09A
ST 4-56	DST 4-56	56V C.T. @ 0.11A	28V @ 0.22A
ST 5-56	DST 5-56	56V C.T. @ 0.22A	28V @ 0.44A
ST 6-56	DST 6-56	56V C.T. @ 0.35A	28V @ 0.7A
ST 7-56	DST 7-56	56V C.T. @ 0.65A	28V @ 1.3A
ST 2-120	DST 2-120	120V C.T. @ 0.01A	60V @ 0.02A
ST 3-120	DST 3-120	120V C.T. @ 0.02A	60V @ 0.04A
ST 4-120	DST 4-120	120V C.T. @ 0.05A	60V @ 0.1A
ST 5-120	DST 5-120	120V C.T. @ 0.1A	60V @ 0.2A
ST 6-120	DST 6-120	120V C.T. @ 0.16A	60V @ 0.32A
ST 7-120	DST 7-120	120V C.T. @ 0.3A	60V @ 0.6A