

VS-PPC-J-1220-1227-1020-0,2INT

Order No.: 1405154

Y distributor with MSTB plug



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1405154>

PROFINET Y-distributor with assembled power line, with push-pull connectors, 5-pos., IP65, connector with metal housing on 2x socket in the metal housing



Commercial data

EAN	4046356330695
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.6353 KG
Catalog page information	Page 247 (PC-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	5
Shielded	No
Insertion/withdrawal cycles	≤ 100
Cable diameter	11.80 mm

Smallest bending radius, fixed installation	50 mm
Smallest bending radius, movable installation	180 mm
Length of cable	0.2 m
Ambient temperature (operation)	-40 °C ... 70 °C (cable, fixed installation)
	-5 °C ... 70 °C (cable, flexible installation)
	(plug/socket)

Material data

Housing material	Aluminum, die-cast
Contact material	Copper alloy
Contact surface material	Gold over nickel
Outer sheath, material	PVC
External sheath, color	Silver-gray RAL 7001
Degree of protection	IP65
Inflammability class acc. to UL 94	V0

Electrical characteristics


Rated voltage (III/3)	24 V
Rated current	16 A (at 20°C)

Line characteristics

Conductor cross section	2.5 mm ²
External cable diameter	11.80 mm
External sheath, color	Silver-gray RAL 7001
Outer sheath, material	PVC
Conductor material	Bare Cu litz wires
Smallest bending radius, fixed installation	50 mm
Smallest bending radius, movable installation	180 mm

Drawings

Dimensioned drawing

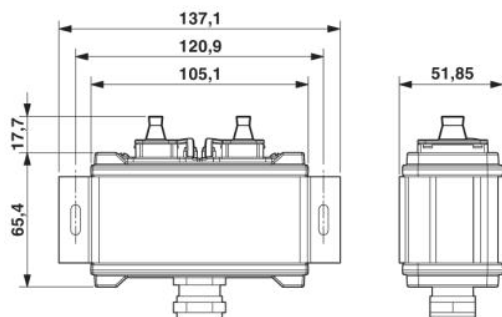

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;