
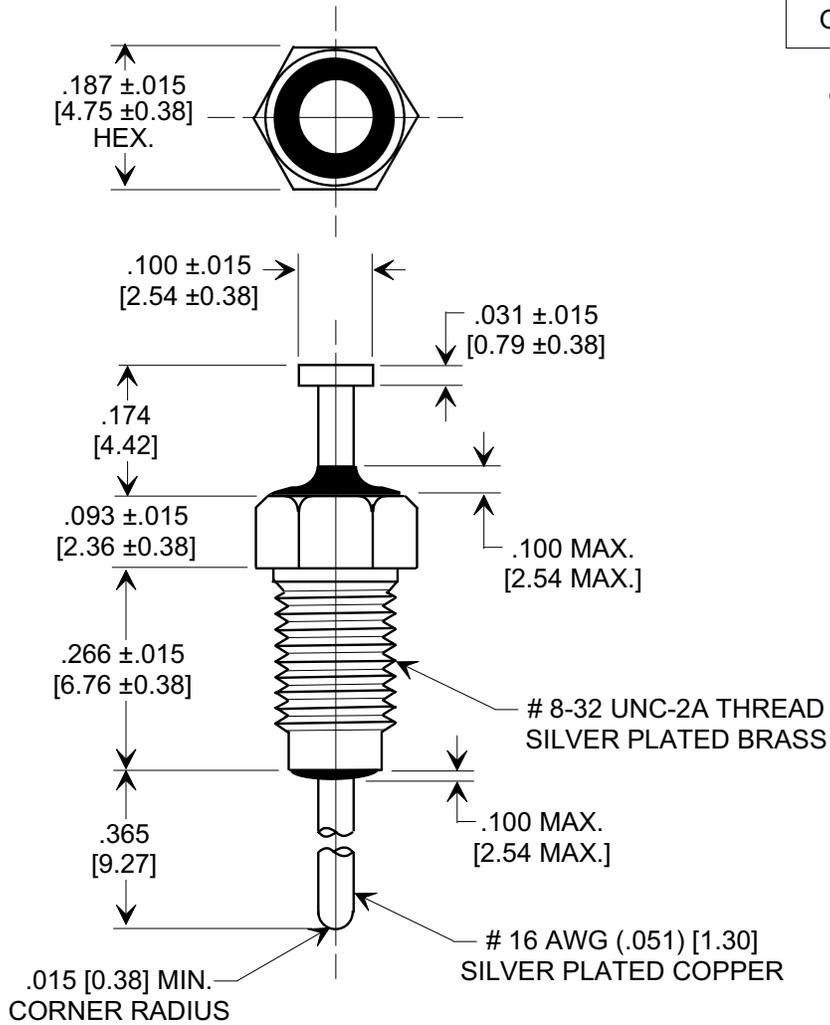


Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

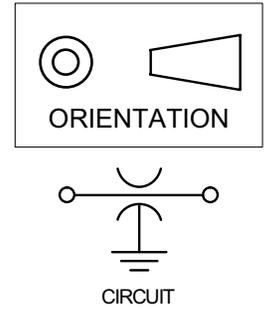

**SPECIFICATIONS**

Tusonix Style:	2425-536
Capacitance Value:	1,000 pF
Capacitance Tolerance:	-0% +100%
Temp. Characteristic:	X5U
Rating:	200 VDC @ + 85°C
Operating Range:	-55°C TO +85°C
Insulation Resistance:	10,000 megohms (min.) @ +25°C
DWV @ 2 SEC. MIN.:	600 VDC

NOTE:  
1. MOUNTING TORQUE NOT TO EXCEED 5 lb-in.

<b>REVISION RECORD</b> Original Release C.O. 20020718-3-01	0	<b>--TOLERANCES--</b> Unless Otherwise Specified	Title <b>MINIATURE BUSHING FEED-THRU</b>		
			<b>DECIMAL ± .031 [0.79]</b>	Drawn <b>S.M. 09-12-03</b>	Scale <b>X 4</b>
		<b>ANGLES ±</b>	Approved <b>T.C. 09-12-03</b>		
	<b>TUSONIX</b> TUCSON, ARIZONA		<b>A</b>	<b>2425-536-X5U0-102P</b>	