



Header (Male) Solder-in, right-angle, unshielded

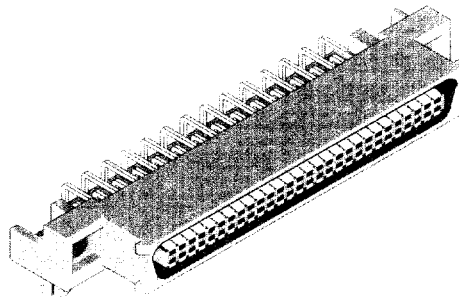







Features

- 1,27mm x 1,905 mm grid
- Power contacts to 3 A

Only signal contacts



Signal contacts and
4 power contacts

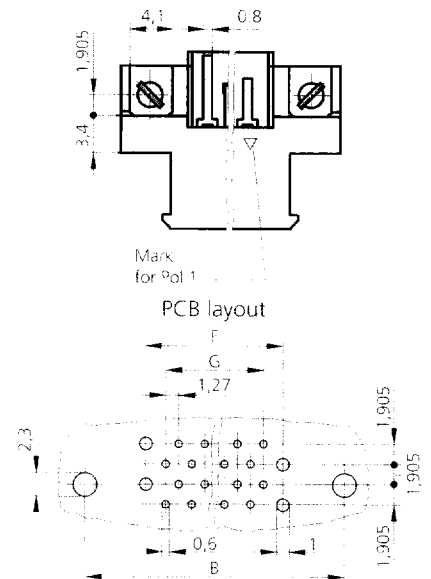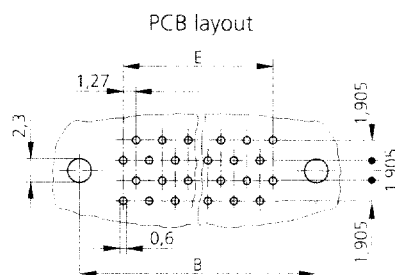

Ordering information and dimensions (All dimensions in mm)

Only signal contacts		Signal contacts & 4 power contacts		Dim. A ±0,1	Dim. B ±0,05	Dim. C -0,05	Dim. D +0,05	Dim. E	Dim. F	Dim. G
Pos.	Part number	Pos.	Part number							
48	515.201.003.048.000	40 + 4	515.211.003.044.000	45,11	39,66	34,71	31,11	29,21	27,93	24,13
56	515.201.003.056.000	48 + 4	515.211.003.052.000	50,19	44,74	39,80	36,19	34,29	33,01	29,21
68	515.201.003.068.000	60 + 4	515.211.003.064.000	57,81	52,36	47,40	43,81	41,91	42,63	38,83
88	515.201.003.088.000	80 + 4	515.211.003.084.000	70,51	65,06	60,10	56,51	54,61	53,33	49,53
108	515.201.003.108.000	100 + 4	515.211.003.104.000	83,21	77,76	72,80	69,21	67,31	66,03	62,23