

ASH-515 Series Pitch 5.08mm

Housing

BODY MATERIAL: THERMOPLASTIC (UL 94V-0), GREEN
CLAMP: NICKEL PLATED PHOSPHOR BRONZE
WIRE CAGE: NICKEL PLATED BRASS
WIRE RANGE AWG: 12-16 STR.
SCREWS: ZINC PLATED STEEL
AVAILABLE IN MULTI POLES FROM 2 THRU 24
RATING: 10 AMPERES, 300 VAC
INSULATION WITHSTANDS VOLTAGE AC2000
INSULATION RESISTANCE 500MΩ OR MORE AT DC500V


Material

BODY MATERIAL: THERMOPLASTIC (UL 94V-0), GREEN
TERMINALS PIN: TIN PLATED BRASS
AVAILABLE IN MULTI POLES FROM 2 THRU 24.
CHOICE OF RIGHT ANGLE OR VERTICAL


Features

- * DISCONNECTABLE TWO-PIECE CONSTRUCTION SIMPLIFIES FIELD MAINTENANCE.
- * CHOICE OF PARALLEL OR PERPENDICULAR WIRING.
- * SHROUDED PIN HEADER PROTECTS PINS FROM PHYSICAL OR CHEMICAL DAMAGE.



ASH-515H8

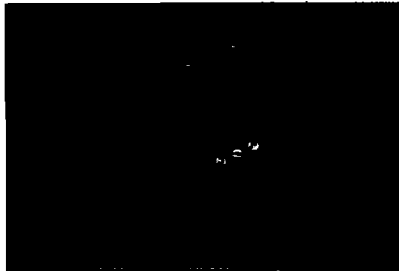

ASH-515V8

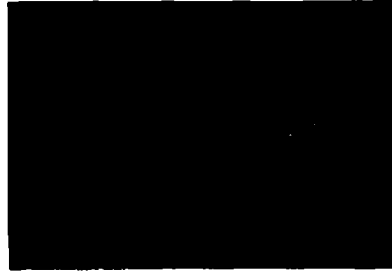

ASH-515R8

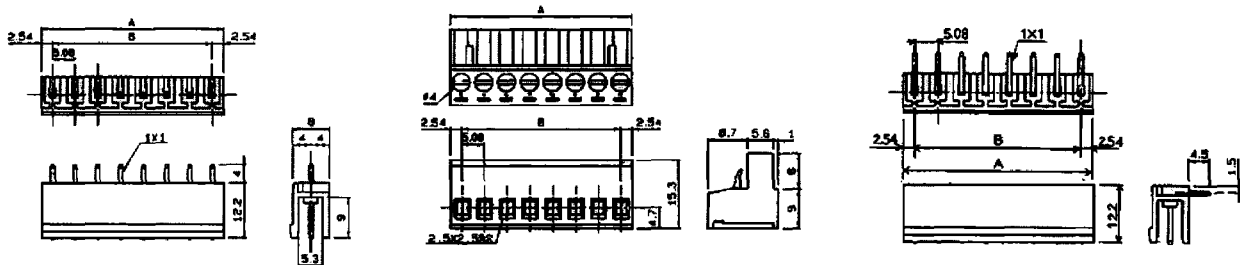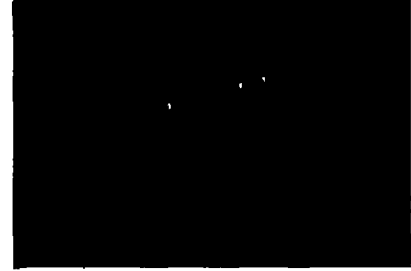

PITCH:5.08mm
DIMENSION: ±0.2mm

10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72	50.80
5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72

55.88	60.96	66.04	71.12	76.20	81.28	86.36	91.44	96.52
50.80	55.88	60.96	66.04	71.12	76.20	81.28	86.36	91.44