



DB978H120(E/N/A/B/R/S)-M

120°, 13 dBd Directional Antenna
1850-1990 MHz


120°

Model Number	DB978H120E-M	DB978H120N-M
	DB978H120A-M	DB978H120B-M
	DB978H120R-M	DB978H120S-M
Connector Options	Bottom: E = 7-16 DIN N = Type N Female Back: A = 7-16 DIN B = Type N Female Top: R = 7-16 DIN S = Type N Female	
Frequency Range	1850 - 1990 MHz	
Gain	13 dBd (15.1 dBi)	
Null Fill	First lower null is less than 18 dB down from max. First lower side lobe suppressed.	
VSWR	< 1.4:1	
Beamwidth (3dB from max)	Horizontal: 120° ± 10° Vertical: 7° ± .5°	
Front to Back Ratio	> 25 dB	
Polarization	Vertical	
Max. Input Power	250 Watts	
Application	PCS	
Weight	7.1 lbs (3.2 kg)	
Wind Area	2.0 ft² (.19 m²)	
Wind Load	80 lbf (356N) 35.9 kp (at 100 mph)	
Max. Wind Speed	165 mph (266 km/h)	
Material	Reflector Screen: Pass. Aluminum Radiators: Brass Radome: PVC, UV Resistant Mounting Hdw: Galvanized Steel	
Color	Normal: Gray	
Mounting	DB390 pipe mount kit, included.	
Downtilt Brackets (Optional)	DB5098	
Weather Protection	Fully protected by backplate and radome.	
Lightning Protection	All metal parts grounded.	
Packing Size	53" x 7" x 6" (135 X 18 X 15 cm)	
Shipping Weight	11 lbs (5 kg)	

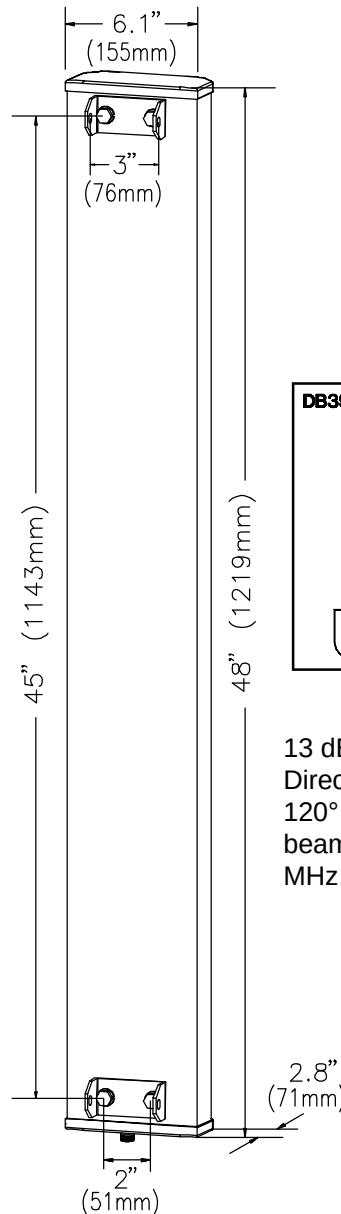

13 dBd (15.1 dBi) Gain
Directional Antenna with
120° horizontal 3 dB
beamwidth for 1850-1990
MHz.

Antenna Patterns

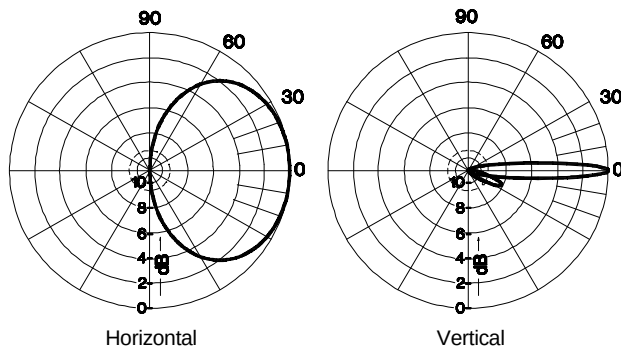

Electrical Downtilt (T) Option

Model Number	Downtilt	Horizon Gain
978H120T2E/N-M	2°	13.0 dBd
978H120T3E/N-M	3°	12.9 dBd
978H120T5E/N-M	5°	12.7 dBd
978H120T7E/N-M	7°	12.5 dBd

Specifications are for reference only.

099050-005-H 12/99



DECIBEL PRODUCTS

A Division of Allen Telecom Inc.

8635 Stemmons Freeway • P. O. Box 569610 • Dallas, Texas 75356-9610
214 / 631-0310 • Fax: 214 / 631-4706

