


DC20

wall mounting receptacle

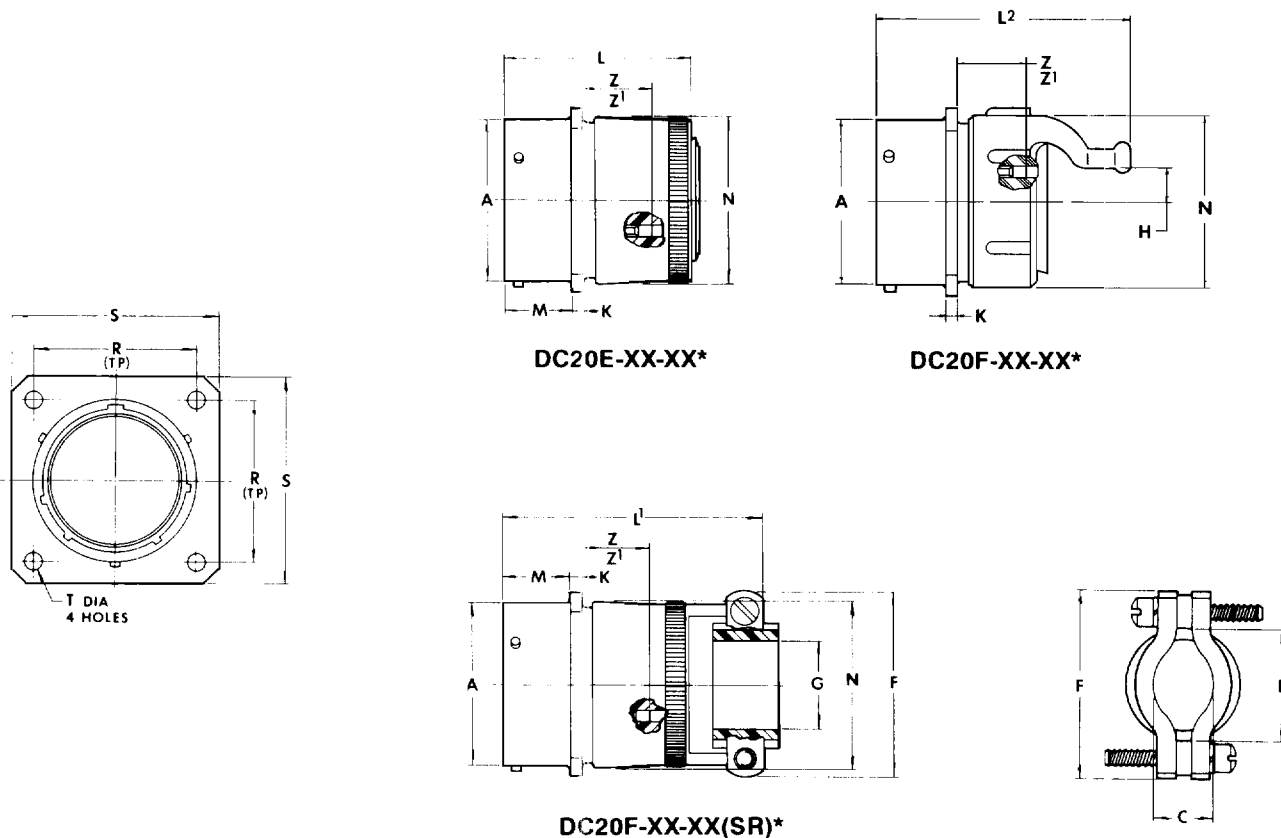

DC20E-XX-XX*

DC20F-XX-XX*

DC20F-XX-XX(SR)*

Z for pin contacts
Z' for socket contacts

*To complete order number, see page 2.

Shell Size	A Dia. +.001 - .005	K ±.016	M +.031 - .000	R (TP)	S Max.	T Dia. ±.005	L Max.	N Max.	L' Max.	L ² Max.	F Max.	G +.010 - .025 Dia. Free	H Radius ±.015	E Min.	C Closed Max.	Z ±.055	Z' ±.055
10	.590	.062	.431	.719	.954	.120	1.328	.691	1.922	2.656	.891	.188	.113	.297	.187	.509	.443
12	.750	.062	.431	.812	1.047	.120	1.328	.827	1.922	2.656	1.016	.312	.150	.422	.281	.509	.443
14	.875	.062	.431	.906	1.141	.120	1.328	.941	1.922	2.906	1.141	.375	.188	.547	.325	.509	.443
16	1.000	.062	.431	.969	1.234	.120	1.328	1.067	2.000	2.906	1.203	.500	.223	.609	.356	.509	.443
18	1.125	.062	.431	1.062	1.328	.120	1.328	1.191	2.000	2.906	1.469	.625	.281	.734	.456	.509	.443
20	1.250	.094	.556	1.156	1.453	.120	1.359	1.327	2.172	2.938	1.469	.625	.281	.734	.519	.414	.353
22	1.375	.094	.556	1.250	1.578	.120	1.359	1.452	2.172	2.938	1.656	.750	.303	.922	.519	.414	.353

All dimensions for reference only