
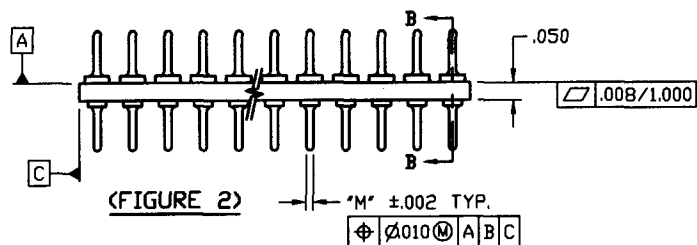
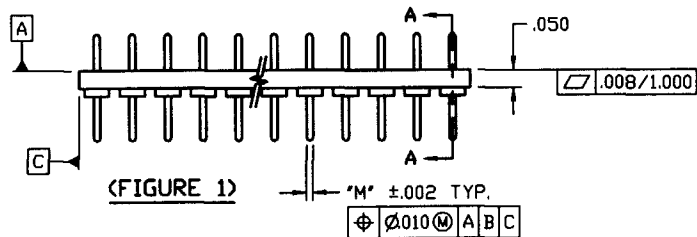


TABLE 2 CONTACTS

[CXXX]S	FIGURE	'A' DIM.	'E' DIM.	'T' DIM.	'M' DIM.	'F' DIM.	PLATING	PCB HOLE
868	1	.300	.104	.125	Ø.018	.072	10µ" GOLD OVER 100µ" MIN. NICKEL	.022±.003
880	2	.335	.125	.125	Ø.020	.085	10µ" GOLD OVER 100µ" MIN. NICKEL	.024±.003

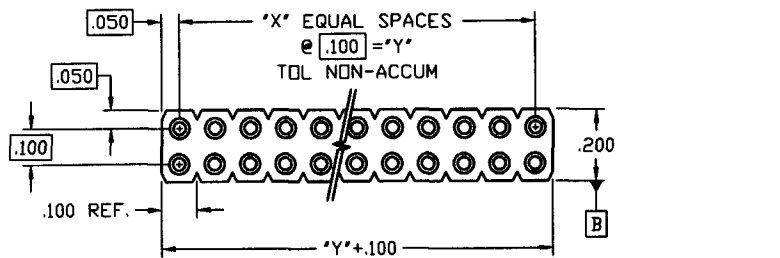

NOTES:

1. NUMBER OF CONTACTS PER ROW (01 TO 32).
2. INSULATOR MATERIAL:
GLASS REINFORCED POLYPHENYLENE SULFIDE (PPS)
RATED UL 94V-0, COLOR BLACK.
3. CONTACT MATERIAL:
OUTER SHELL: BRASS ALLOY 360, 1/2 HARD PER QQ-B-626.
4. CONTACT PLATING:
TIN/LEAD PER MIL-P-81728 TYPE 1,
NICKEL PER QQ-N-290.
GOLD PER MIL-G-45204, TYPE 1, GRADE C.


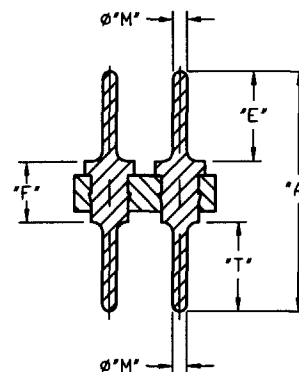
SECTION A-A
SCALE 4:1SECTION B-B
SCALE 4:1

TABLE 1

PART NUMBER		DIMENSION		NO. OF
SST 050-2 X [] - [CXXX]S		'Y'	'X'	POSITIONS
	01	0	0	2
	02	.100	1	4
	03	.200	2	6
	04	.300	3	8
	05	.400	4	10
	06	.500	5	12
	07	.600	6	14
	08	.700	7	16
	09	.800	8	18
	10	.900	9	20
	11	1.000	10	22
	12	1.100	11	24
	13	1.200	12	26
	14	1.300	13	28
	15	1.400	14	30
	16	1.500	15	32
	17	1.600	16	34
	18	1.700	17	36
	19	1.800	18	38
	20	1.900	19	40
	21	2.000	20	42
	22	2.100	21	44
	23	2.200	22	46
	24	2.300	23	48
	25	2.400	24	50
	26	2.500	25	52
	27	2.600	26	54
	28	2.700	27	56
	29	2.800	28	58
	30	2.900	29	60
	31	3.000	30	62
	32	3.100	31	64

PART NUMBER (SEE TABLES)

SST 050-2 X [] - [CXXX]S

www.fciconnect.com

DOUBLE ROW SIP HEADERS
(LOW PROFILE)

product family	SIP	code	-
size	dwg no	sheet	1 of 1
A	58902		

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY
ltr	ecn no	dr	date	linear	.XX ±.01	
A	V00765	DLW	3/10/00		.XXX ±.005	
				angles	.XXXX ±.0020	
					0° ±2°	
				dr	D. WOLFORD 3/10/00	 INCH scale 2:1
				enrg	A. VASBINDER 3/10/00	
				chr	A. VASBINDER 3/10/00	
				appd	A. VASBINDER 3/10/00	
sheet index	revision sheet	A	1			

cage code

22526