

Nominal diameter **Withdraw. force** **Rated current** **Contact resistance**

Type

Part No.

1 mm

-

6 A

1 mΩ

LK 1-B/1-S

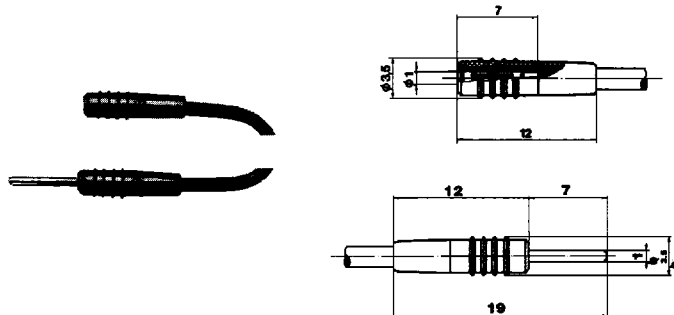
21.0450
(7.5 cm)

Highly flexible patch cord with 1 mm (.040 in) dia. spring-loaded socket and 1 mm (.040 in) dia. pin. Matching all spring-loaded 1 mm (.040 in) sockets, jacks and pins.

Pin: machined brass, gold plated.

Socket: machined brass, gold plated and spring-loaded with gold plated MC®-Multilam™.

PVC insulated wire 0.25 mm² (23 AWG).

21.0460
(15 cm)21.0470
(30 cm)21.0480
(45 cm)

1.5:1

Components and ratings:

- Socket LS 1-B # 22.1008
- Pin LS 1-S # 22.1007
- Insulator (polyamide) KT 1-S # 22.2070
- Wire HK 0.25 PVC # 22.0000
- Operating temperature: - 10°C to + 70°C
(14°F to 158°F)

LS 1-B

LS 1-S

KT 1-S



Colors: 1 - 9

2:1

1 mm

-

3 A

1 mΩ

LK 1-A

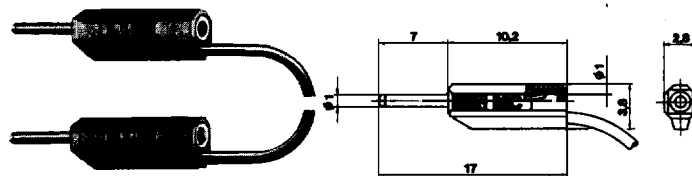
21.0960
(7.5 cm)

Highly flexible patch cord with 1 mm (.040 in) dia. pins with 1 mm (.040 in) dia. spring-loaded in-line socket.

Pin-socket: machined brass, gold plated.

Socket: spring-loaded with gold plated MC®-Multilam™.

PVC insulated wire 0.127 mm² (26 AWG).

21.0970
(15 cm)21.0980
(30 cm)21.0990
(45 cm)

1.5:1

Components and ratings:

- Pin-Socket LS 1-A # 22.1019
- Insulator (polyamide) KT 1-A # 22.2040
- Wire HK 0.127 PVC # 22.0060
- Operating temperature: -10°C to + 70°C
(14°F to 158°F)

LS 1-A

KT 1-A



Colors: 1 - 9

2:1

0 - green/yellow

1 - red

2 - blue

3 - white

4 - black

5 - yellow

6 - green

7 - brown

8 - gray

9 - violet