



Board to wire interface

Shrouded pin header 2.54 mm (.100) pitch.

- Shrouded headers series 6140 are designed to mate with the crimp female plugs series 6110, or with the IDC female plugs series 6120 and 6130.
- Provided with locking and polarization device ensuring fail safe resistance and avoiding any contact mismatch. Stands-off allow cleaning after soldering.
- Available in single or double row versions with 2 to 25 contacts per row.

Special features



- Insulator : flow soldering heat resistant thermoplastic. Self extinguishing (UL 94 VO).
- Contact : Square pin (0.63 mm²).
- Copper alloy.

How to order




Series prefix	6140	07	2	D1	3	00
Number of contacts per row						
02 to 25						
Number of rows						
1 or 2						
Contact type						
D1 : straight						
C1 : right angle						
Contact plating						
2 : gold flash						
3 : tinned						
8 : 0.75 µm gold						
Option						
00 : standard (B = 3 for 1.6 mm PCB)						




Straight

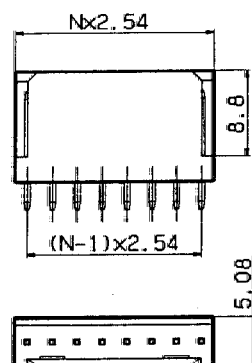



SINGLE ROW






DOUBLE ROW



Right angle

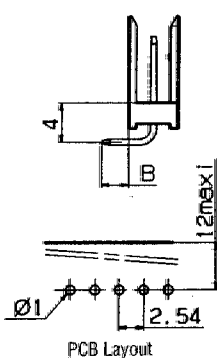

SINGLE ROW

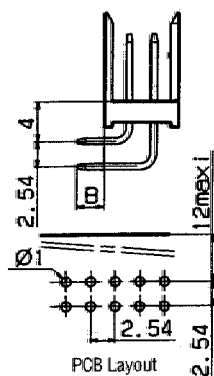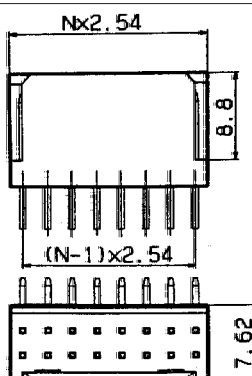

DOUBLE ROW

