


### TOROIDAL INDUCTORS


WHEN ORDERING, ADD CASE PREFIX (TYPE) TO PART NUMBER.

EXAMPLE: U 15-1  
CASE TYPE — U — PART NUMBER  
SEE PAGE 5 FOR SPECIAL ORDERING

#### TYPE U — Uncased

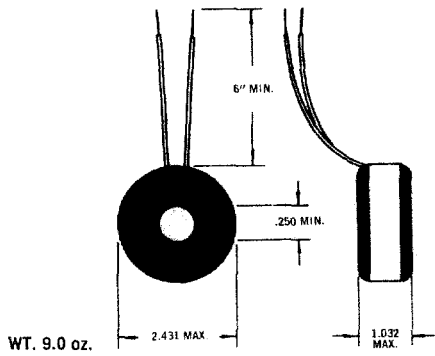

#### TYPE M — Metal Cased

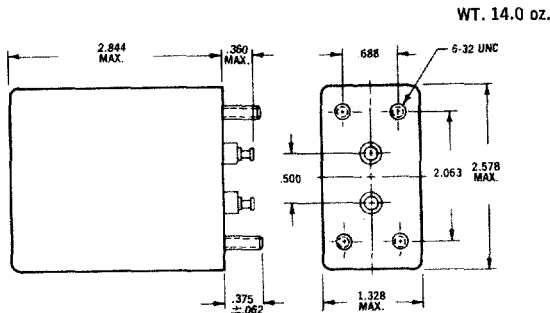

#### CORE NO. 15

Inductance ±1% (mH)	Part Number	Typical	
		DCR* (ohms)	Distributed Capacity (pf)
100.0	15-1	3.1	145
120.0	15-2	3.7	147
125.0	15-3	3.8	148
150.0	15-4	4.6	150
175.0	15-5	5.4	152
200.0	15-6	6.2	154
240.0	15-7	7.4	155
250.0	15-8	7.7	156
300.0	15-9	9.3	158
360.0	15-10	11.1	160
400.0	15-11	12.4	162
430.0	15-12	13.3	164
500.0	15-13	15.5	166
600.0	15-14	18.6	168
720.0	15-15	22.3	170
750.0	15-16	23.2	171
860.0	15-17	26.6	173
1.00 H	15-18	31.0	175
1.20 H	15-19	37.2	176
1.25 H	15-20	38.7	178
1.50 H	15-21	46.5	179
1.75 H	15-22	54.3	180
2.00 H	15-23	62.0	182
2.40 H	15-24	74.4	184
2.50 H	15-25	77.5	186
3.00 H	15-26	93.0	188
3.60 H	15-27	111.6	190
4.00 H	15-28	124.0	192
4.30 H	15-29	133.3	194
5.00 H	15-30	155.0	196
6.00 H	15-31	186.0	198
7.20 H	15-32	223.2	200
7.50 H	15-33	232.5	201
8.60 H	15-34	266.6	204
10.00 H	15-35	310.0	206
12.00 H	15-36	372.0	207
12.50 H	15-37	387.0	208
15.00 H	15-38	465.0	210
17.50 H	15-39	543.0	212
20.00 H	15-40	620.0	214
24.00 H	15-41	744.0	216
25.00 H	15-42	775.0	217
30.00 H	15-43	930.0	219
36.00 H	15-44	1116.0	221
40.00 H	15-45	1240.0	222
43.00 H	15-46	1333.0	224
50.00 H	15-47	1550.0	226
60.00 H	15-48	1860.0	228

\* See page 4 for explanation of variations in DC resistance.

Recommended Frequency: Up to 5 KHz.

Maximum Inductance: 100 H.

Special Stabilization Available: Unstabilized only.

Mechanical Tolerance: ±.015 unless otherwise indicated.

Inserts are available on the "M" Series on special request.

