
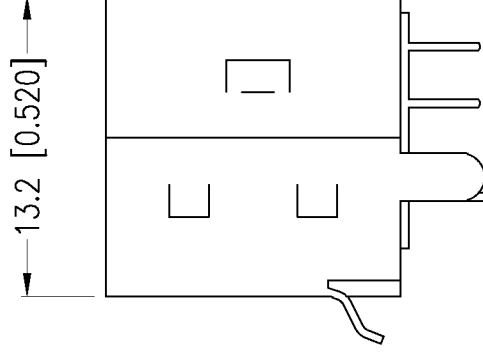


GROUND TAB

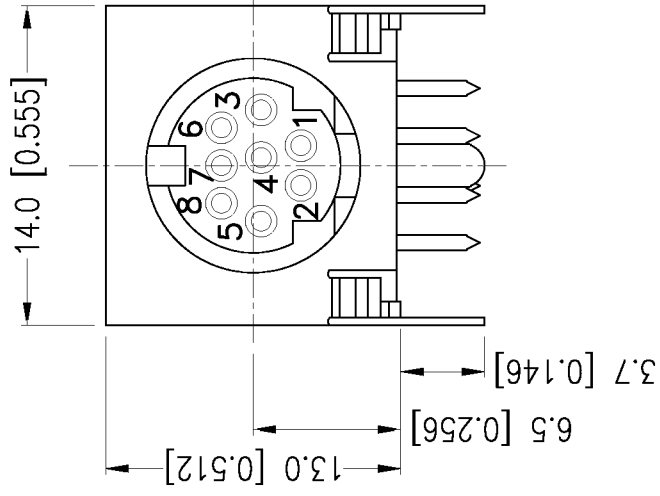

FOOTPRINT (BOTTOM VIEW)

SPECIFICATIONS:

RATING: 100V AC 1A MAX OR
12V DC 2A MAX

INSULATION RESISTANCE:

50 MOHM MIN AT 250V DC

DIELECTRIC STRENGTH:

250V AC, 1 MINUTE


CONTACT RESISTANCE:

CONTACT RESISTANCE:
30 mOHM MAX

INSERTION FORCE:

4.5KG MAX

WITHDRAWAL FORCE:

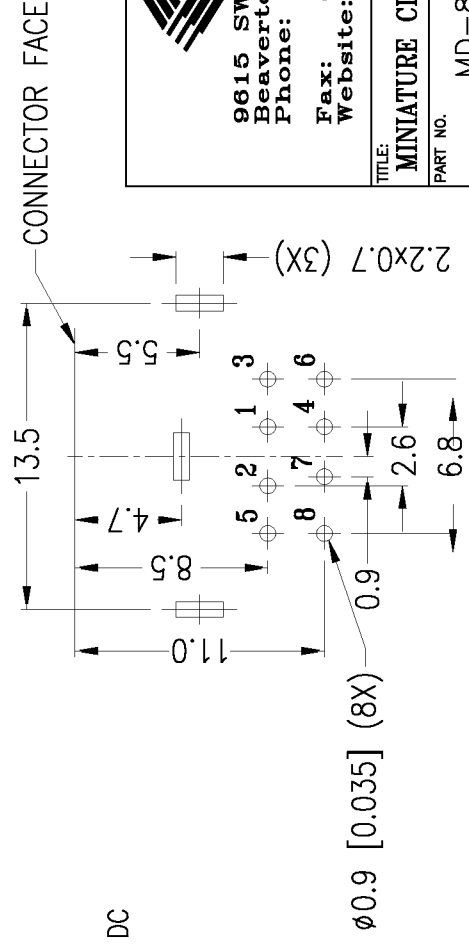

**9615 SW Allen, Suite 103
Beaverton, OR 97005
Phone: (503) 643-4899
800-275-4899
Fax: (503) 643-6129
Website: www.cuistack.com**

TITLE:	
--------	--

MINIATURE CIRCULAR CON.-FULLY SHIELDED

PART NO.

MM [INCHES]

DRAWN BY:	APPROVED BY:
-----------	--------------

SCALE: 3X